



## P1.25 indoor Aluminum Alloy Cabinet Full Color Led Display Specification

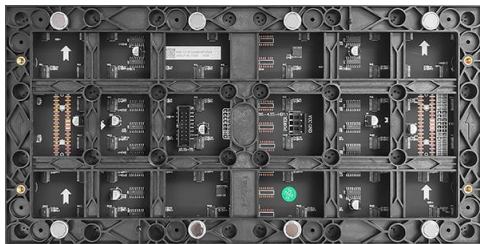

**Module**

### **Cabinet**

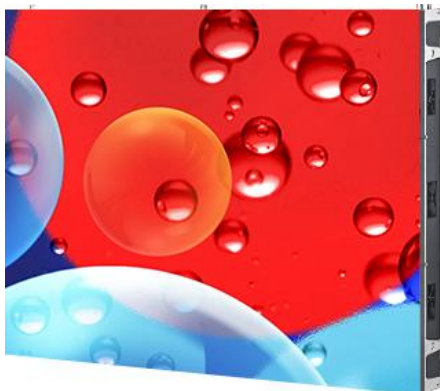


- ◆ Ready stock: Ready stock in European and American warehouses, face to face payment and fetching is available.
- ◆ Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost.
- ◆ Ultra-light and thin: Aluminum alloy cabinet, light-weighted, thin, beautiful appearance;
- ◆ Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions.
- ◆ Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.

### Technical Parameters :


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	1.25mm、256*128、320*160*15mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1010
	Working voltage、 Module Power	DC4.2~4.5V、 ≤20W
	Driving IC、 Driving way	DP3364、 1/64S
	HUB	MRV208-N
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum Alloy、 3.5kg/Cabinet
	Resolution rate、 size、 Module quantity	512*384Dots、 640*480*70mm、 2*3
	Density	288906 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥500CD/m <sup>2</sup> 、 6000K-8000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.4mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	≤450W/m <sup>2</sup> 、 ≤150W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 3840Hz、 ≥13bit
	Control system、 System supports	Novastar/Colorlight、 Windows
	Working temperature、 Protection grade	- 10~40℃、 Front/Back: IP40
*Reference information, different configurations, different parameters		

### Package Parameters :



Gross Weight (kg)	35kg (Estimated data,6pcs /Case)
Outer Package Size	720*630*560mm (Estimated data,6pcs /Case)
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

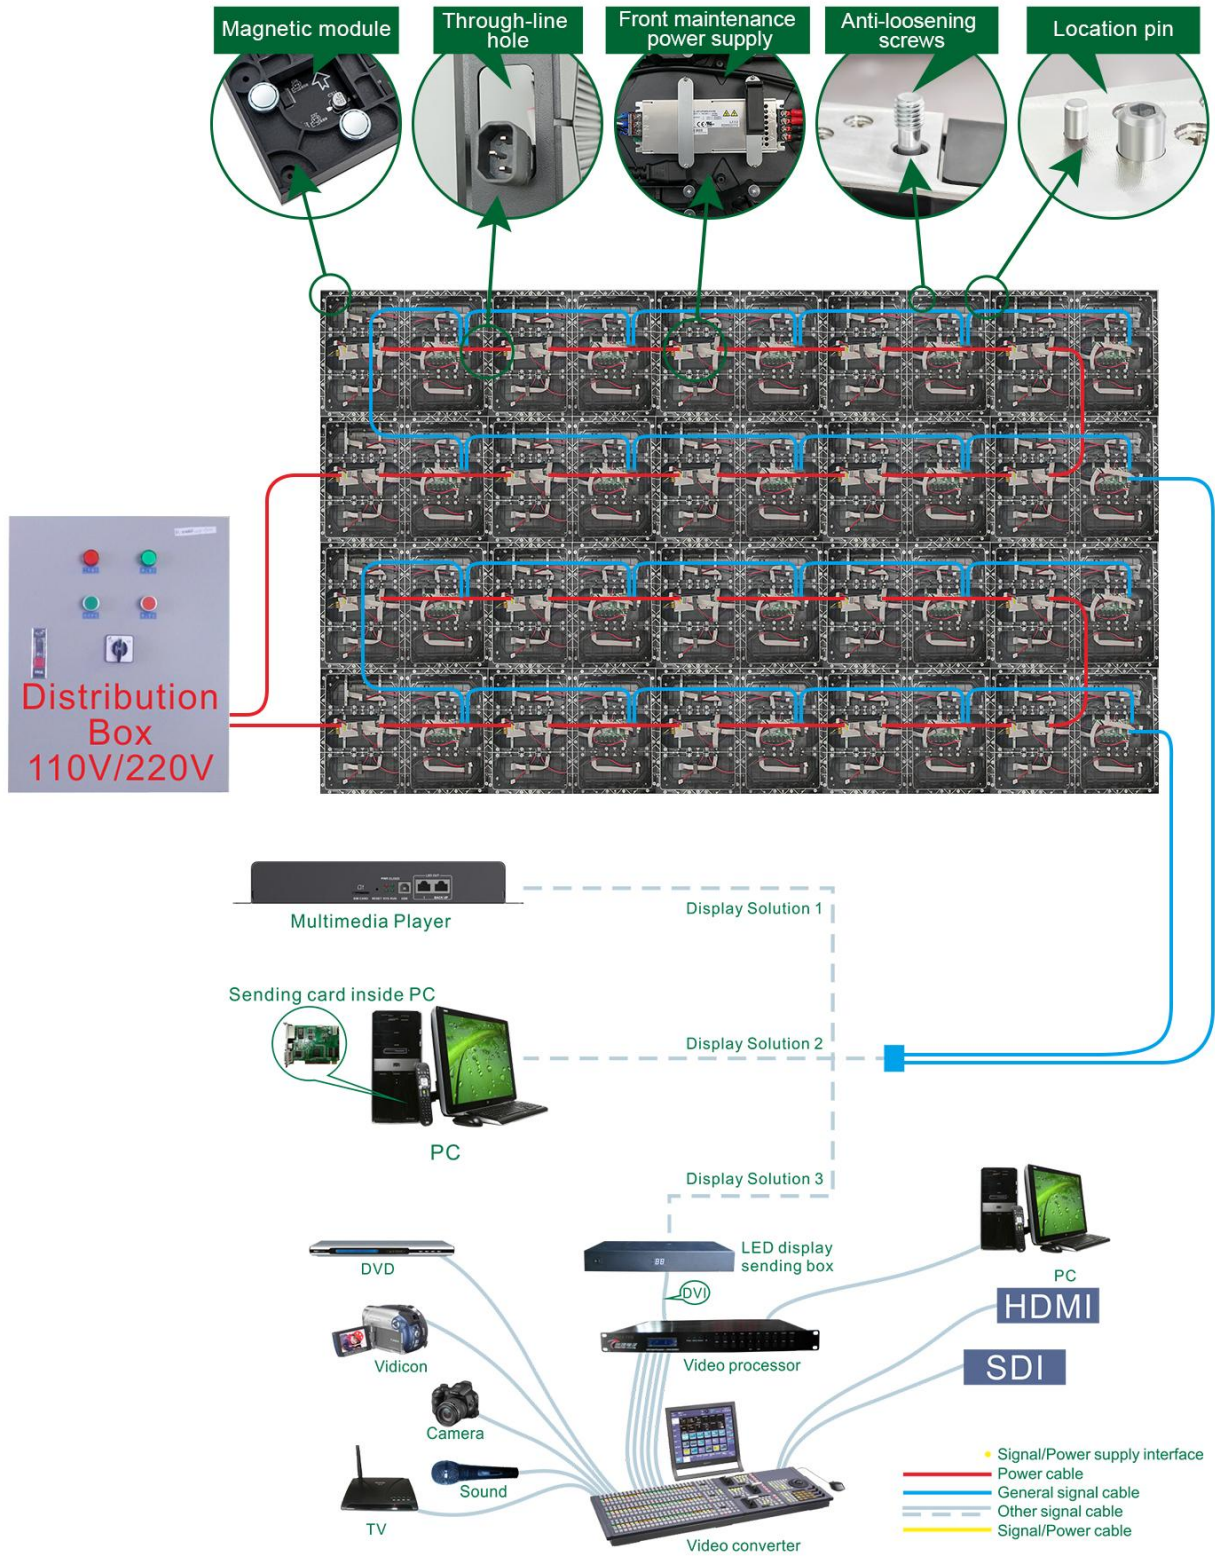


## P1.53 indoor Aluminum Alloy Cabinet Full Color Led Display Specification

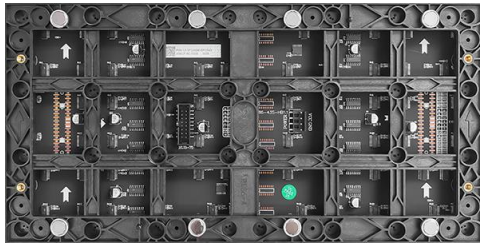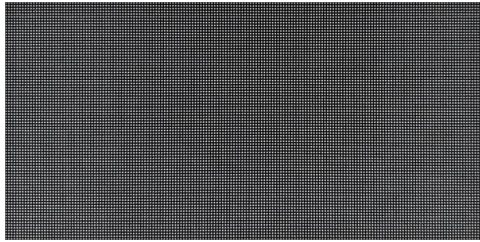

**Module**

### **Cabinet**

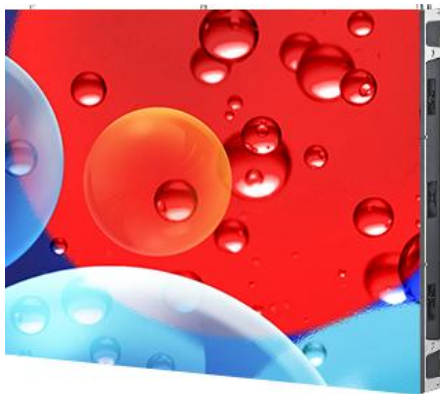


- ◆ Ready stock: Ready stock in European and American warehouses, face to face payment and fetching is available.
- ◆ Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost.
- ◆ Ultra-light and thin: Aluminum alloy cabinet, light-weighted, thin, beautiful appearance;
- ◆ Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions.
- ◆ Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.

### Technical Parameters :


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	1.53mm、208*104、320*160*15mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1212
	Working voltage、 Module Power	DC4.2~4.5V、 ≤20W
	Driving IC、 Driving way	DP3364、 1/52S
	HUB	MRV208-N
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum Alloy、 3.5kg/Cabinet
	Resolution rate、 size、 Module quantity	416*312Dots、 640*480*70mm、 2*3
	Density	288906 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥500CD/m <sup>2</sup> 、 6000K-8000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.4mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	≤450W/m <sup>2</sup> 、 ≤150W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 3840Hz、 ≥13bit
	Control system、 System supports	Novastar/Colorlight、 Windows
	Working temperature、 Protection grade	- 10~40℃、 Front/Back: IP40
*Reference information, different configurations, different parameters		

### Package Parameters :



Gross Weight (kg)	35kg (Estimated data,6pcs /Case)
Outer Package Size	720*630*560mm (Estimated data,6pcs /Case)
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

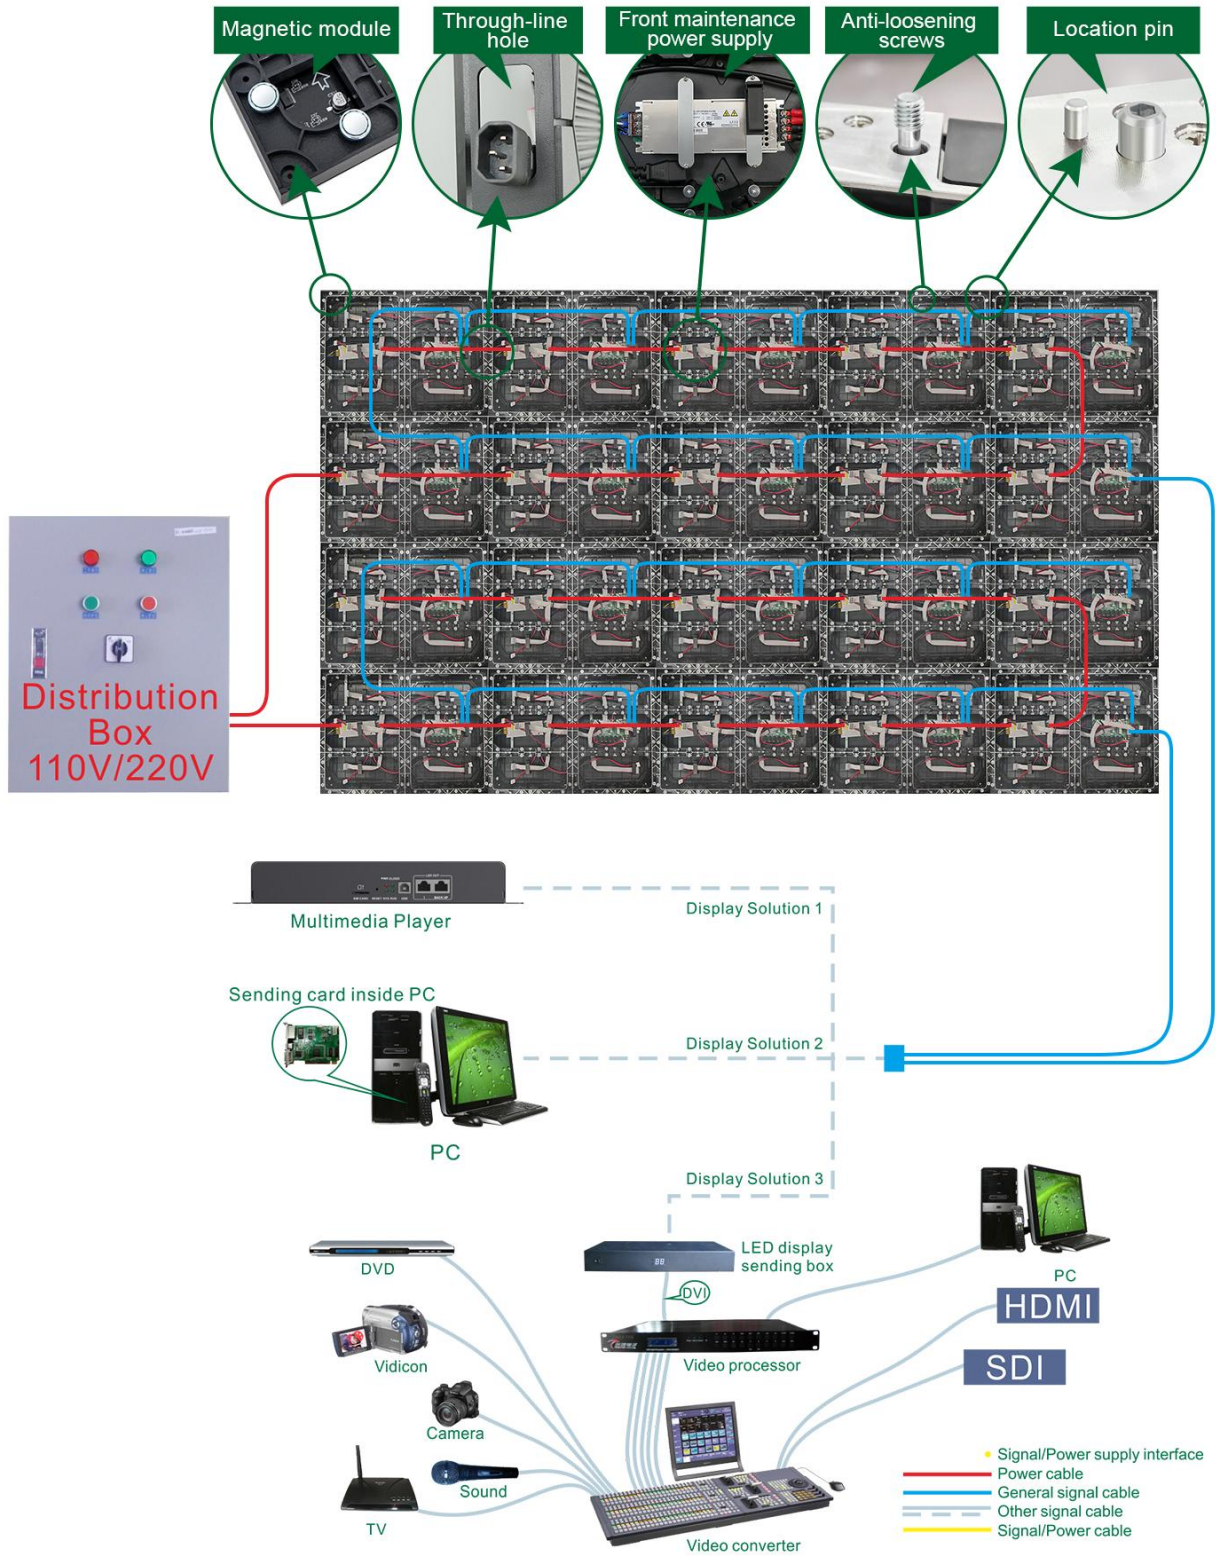


## P1.86 indoor Aluminum Alloy Cabinet Full Color Led Display Specification

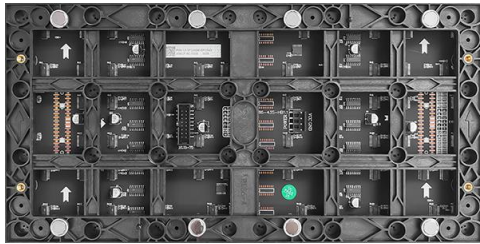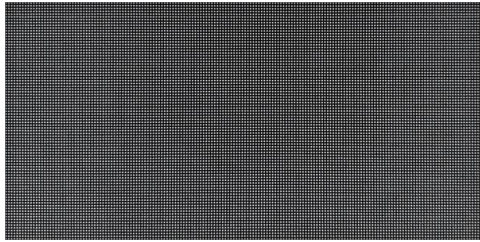

**Module**

### **Cabinet**

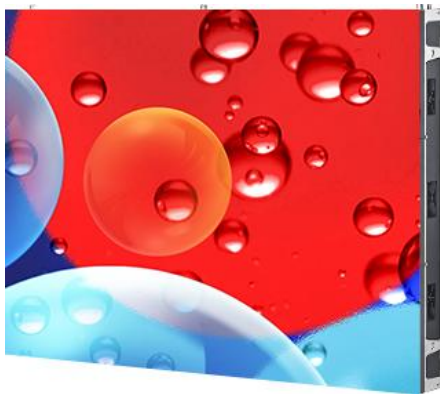


- ◆ Ready stock: Ready stock in European and American warehouses, face to face payment and fetching is available.
- ◆ Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost.
- ◆ Ultra-light and thin: Aluminum alloy cabinet, light-weighted, thin, beautiful appearance;
- ◆ Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions.
- ◆ Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.

### Technical Parameters :


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	1.86mm、172*86、320*160*17mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1515
	Working voltage、 Module Power	DC4.2~4.5V、 ≤20W
	Driving IC、 Driving way	DP3364、 1/43S
	HUB	MRV208-N
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum Alloy、 3.5kg/Cabinet
	Resolution rate、 size、 Module quantity	344*258Dots、 640*480*70mm、 2*3
	Density	288906 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥500CD/m <sup>2</sup> 、 6000K-8000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.4mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	≤450W/m <sup>2</sup> 、 ≤150W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 3840Hz、 ≥13bit
	Control system、 System supports	Novastar/Colorlight、 Windows
	Working temperature、 Protection grade	- 10~40℃、 Front/Back: IP40
*Reference information, different configurations, different parameters		

### Package Parameters :



Gross Weight (kg)	35kg (Estimated data,6pcs /Case)
Outer Package Size	720*630*560mm (Estimated data,6pcs /Case)
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

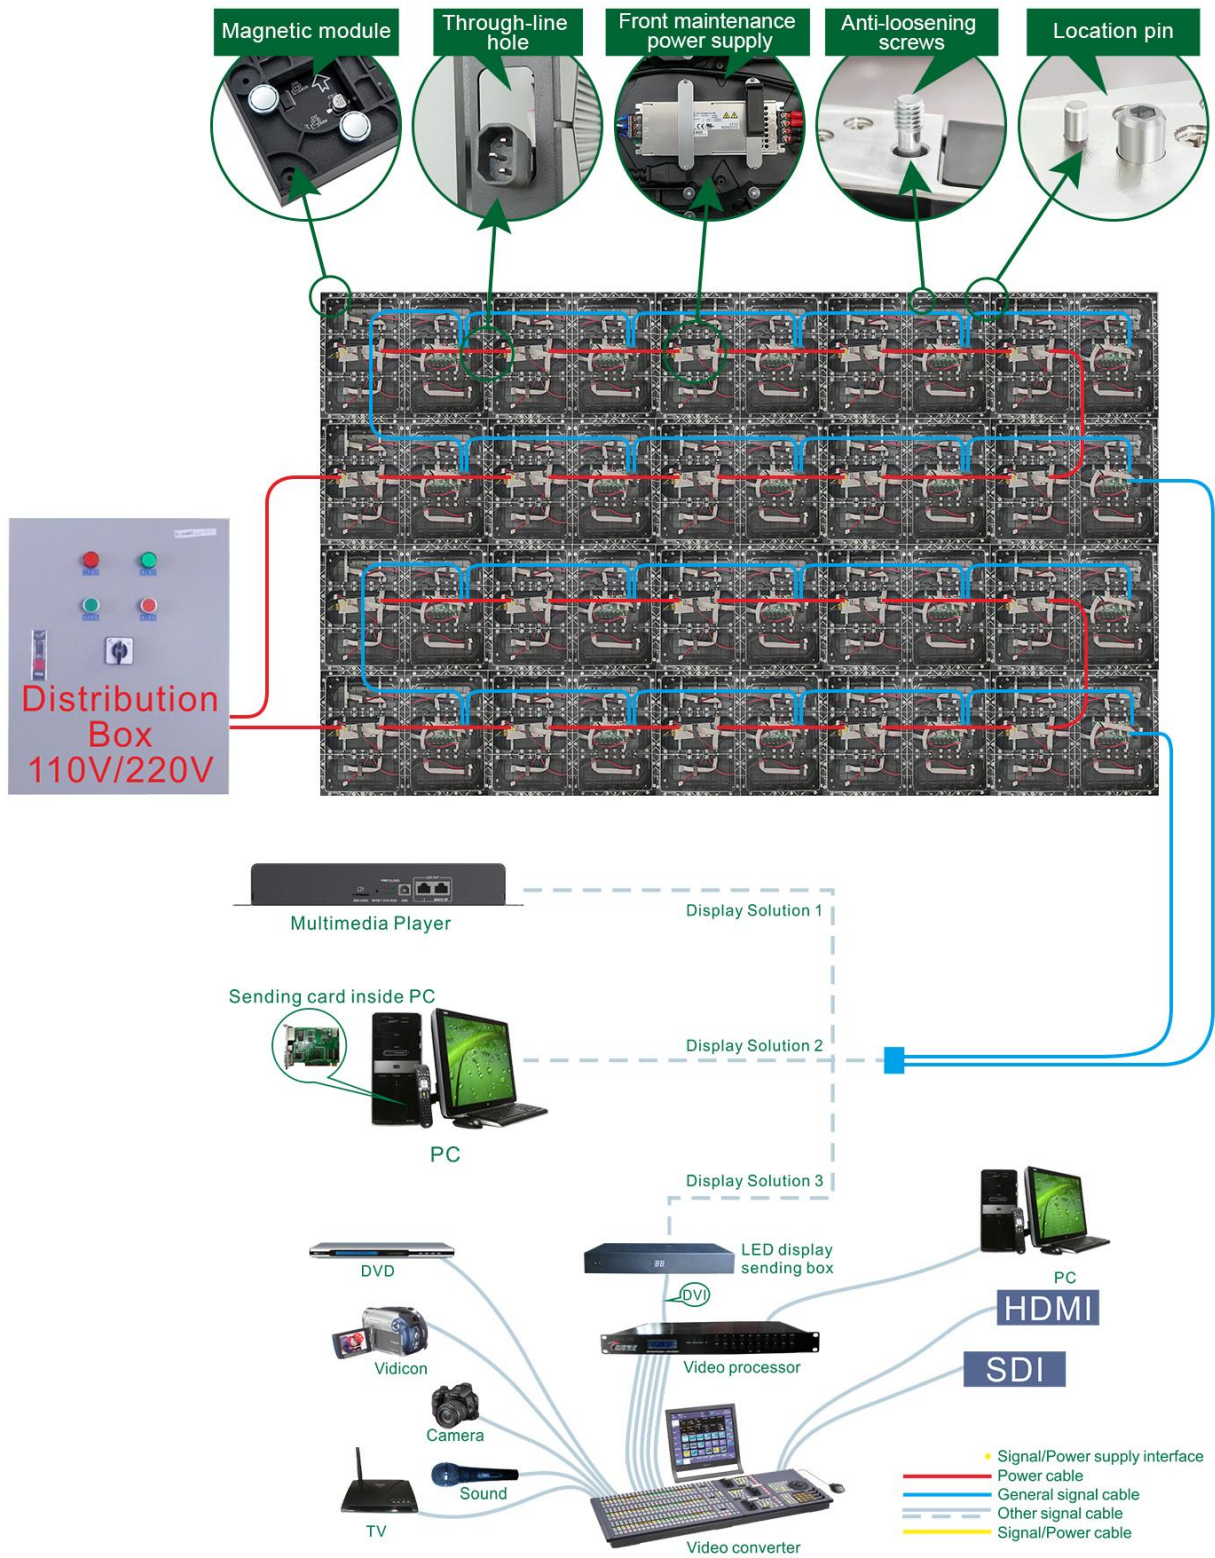


## P2.5 indoor Aluminum Alloy Cabinet Full Color Led Display Specification

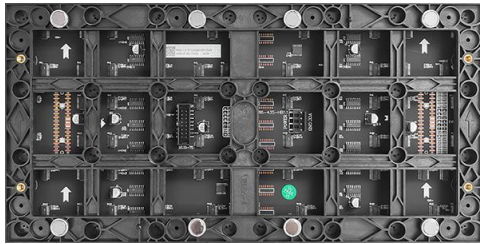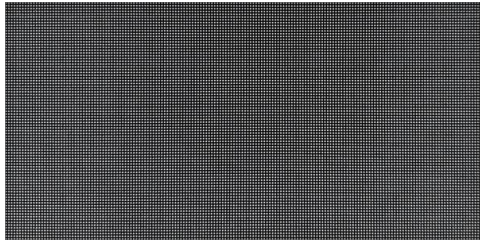

**Module**

### **Cabinet**

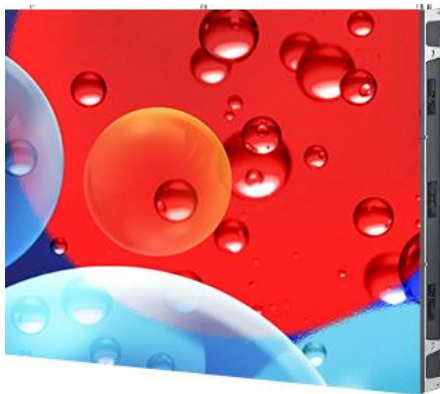


- ◆ Ready stock: Ready stock in European and American warehouses, face to face payment and fetching is available.
- ◆ Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost.
- ◆ Ultra-light and thin: Aluminum alloy cabinet, light-weighted, thin, beautiful appearance;
- ◆ Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions.
- ◆ Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.

### Technical Parameters :


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	2.5mm、128*64、320*160*15mm
	Pixel color、 Pixel LED	1R1G1B、 SMD2020
	Working voltage、 Module Power	DC4.2~4.5V、 ≤20W
	Driving IC、 Driving way	DP3364、 1/32S
	HUB	MRP208-N
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum Alloy、 3.5kg/Cabinet
	Resolution rate、 size、 Module quantity	256*192Dots、 640*480*70mm、 2*3
	Density	160000 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥500CD/m <sup>2</sup> 、 6000K-8000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.4mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	≤450W/m <sup>2</sup> 、 ≤150W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 3840Hz、 ≥13bit
	Control system、 System supports	Novastar/Colorlight、 Windows
	Working temperature、 Protection grade	- 10~40℃、 Front/Back: IP40
*Reference information, different configurations, different parameters		

### Package Parameters :



Gross Weight (kg)	35kg (Estimated data,6pcs /Case)
Outer Package Size	720*630*560mm (Estimated data,6pcs /Case)
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

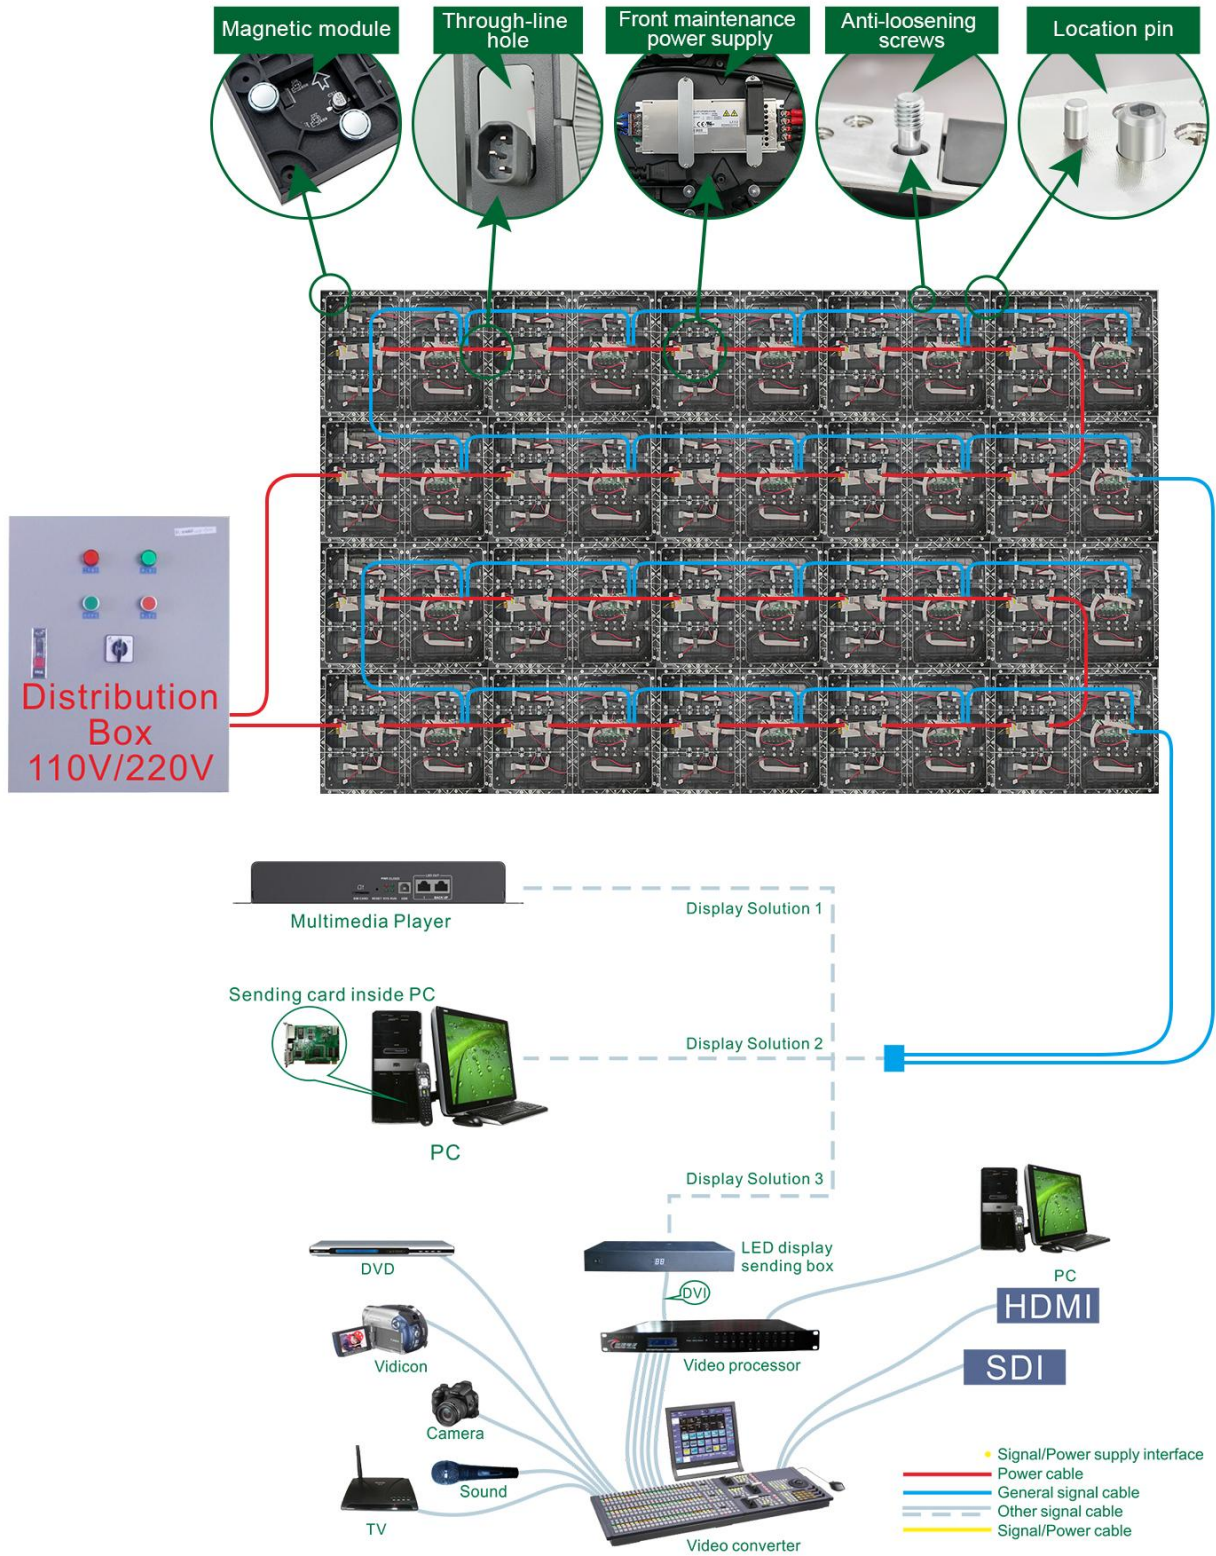


## P2 indoor Aluminum Alloy Cabinet Full Color Led Display Specification

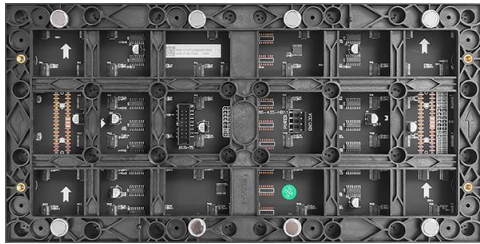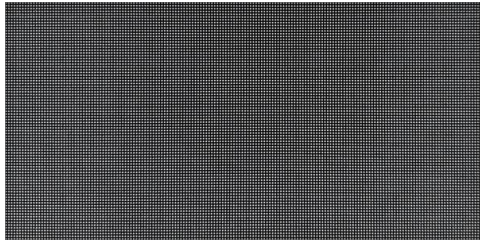

**Module**

### **Cabinet**

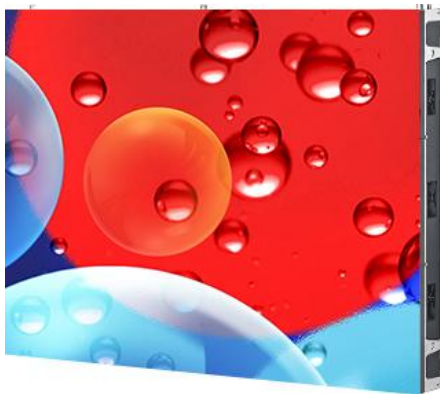


- ◆ Ready stock: Ready stock in European and American warehouses, face to face payment and fetching is available.
- ◆ Good compatibility: The cabinet can be quickly replaced with module of the pixel pitch from P1.25 to P4, and images can be upgraded to higher quality with lower cost.
- ◆ Ultra-light and thin: Aluminum alloy cabinet, light-weighted, thin, beautiful appearance;
- ◆ Wall-mounted installation: modules, power supplies, and system cards can be fully maintained from the front; space-saving, suitable for high-end commercial display occasions.
- ◆ Ratio: Can be assembled to 4:3, 16:9 large screens; the same video source ratio as LCD, and can directly replace the original LCD. Widely used in auditorium stage, conference room, banquet hall, exhibition studio, traffic command, security monitoring and other occasions.

### Technical Parameters :

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、 size	2mm、 160*80、 320*160*15mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1515
	Working voltage、 Module Power	DC4.2~4.5V、 ≤20W
	Driving IC、 Driving way	DP3364、 1/40S
	HUB	MRV208-N
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum Alloy、 3.5kg/Cabinet
	Resolution rate、 size、 Module quantity	320*240Dots、 640*480*70mm、 2*3
	Density	288906 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥500CD/m <sup>2</sup> 、 6000K-8000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.4mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	≤450W/m <sup>2</sup> 、 ≤150W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 3840Hz、 ≥13bit
	Control system、 System supports	Novastar/Colorlight、 Windows
	Working temperature、 Protection grade	- 10~40℃、 Front/Back: IP40
*Reference information, different configurations, different parameters		

### Package Parameters :

Gross Weight (kg)	35kg (Estimated data,6pcs /Case)
Outer Package Size	720*630*560mm (Estimated data,6pcs /Case)
Packing Material	Wooden bracket + paper packaging + pearl cotton * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

