


C-Mesh-P3.91 Invisible Mesh LED Display

Cabinet

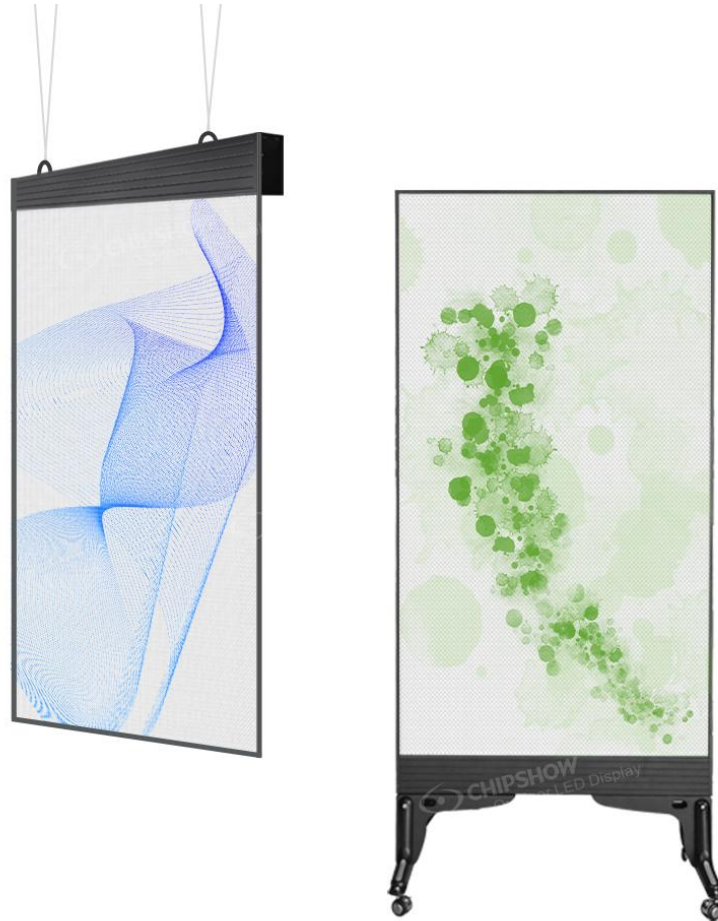

Invisible Mesh All-in-One LED Display Features:

1. Plug and Play: Standard all-in-one display, powered on to auto plays, with program playing via mobile App.;
2. Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting.
3. Easy to Install: Preserves original space structure, supporting hanging, portable stand, and other install ways;
4. High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.
5. Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.

Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	3.91mm、64x307、250*1200
	Pixel LED	DH-C1717IBNR-LA
	Working voltage、Module Power	DC4.6V
	Driving IC、Driving way	LS9001、Static
Cabinet Parameter	Cabinet size、Material、Cabinet Weight(kg/Cabinet)	750*1200 (display size) /771*1368、Aluminum、5.5kg/PC
	Resolution rate、Density	192x307、65536 Dots/m ²
	White balance 、Color temperature	3500 CD/m ² 、6500-9000K
	view angel、Non-Flatness、Module interval	H: 160°; V: 160°、<0.5mm、<0.5mm
	Maximal power/m ² 、Average power/m ² 、Transparency (%)	≤800W/m ² 、≤260W/m ² 、≥90%
	Frame frequency、Refresh frequency、Gray grade	50/60Hz、3840Hz、13bit
	Control system	SYSOLUTION
	Working temperature、Protection grade	-20~50°C、IP20
Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co., Ltd.		

Packaging parameters:

Gross Weight (kg)	11.5kg (Estimated data,2pcs /Case)
Outer Package Size	1380*126*790mm (Estimated data,2pcs /Case)
Packing Material	Carton+Pearl cotton



Installation Instructions:



Android
APP Download



IOS
APP Download



APP User Manual

110-220V
Socket

with program playing
via mobile App

① Lifting Ring



② Hanging Chain



③ Lock Buckle



④ Lifting Ring
Connect Plate




⑤ Built-in Wireless
Receiver



⑥ Sealing Frame




⑦ Display Panel



110-220V
Socket

with program playing
via mobile App

① Display Panel



② Sealing Frame



③ Built-in Wireless
Receiver




④ Bracket



C-Mesh-P4.8 Invisible Mesh LED Display

Cabinet

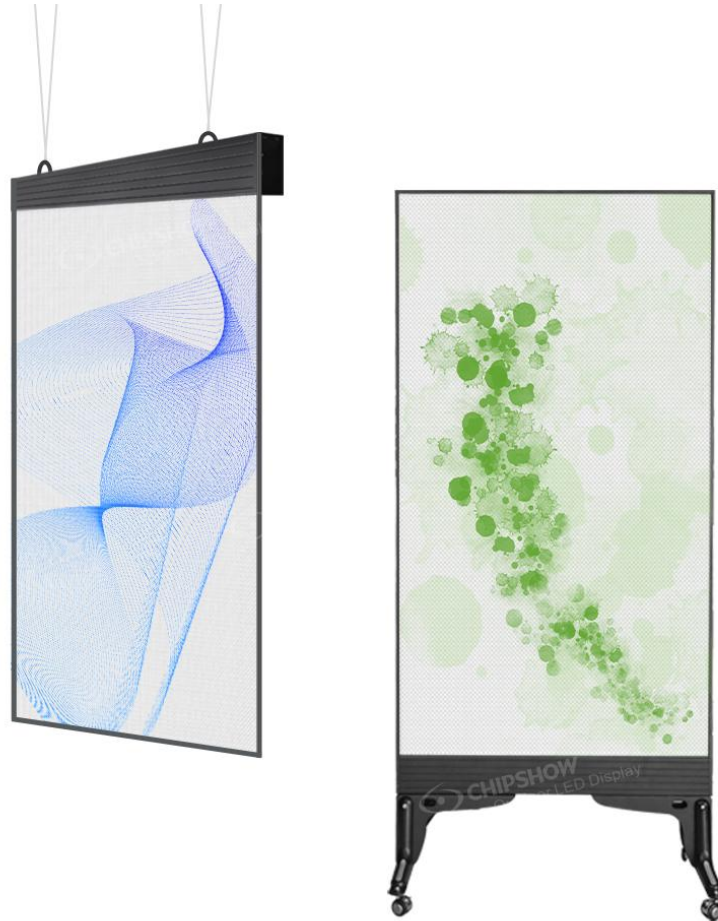

Invisible Mesh All-in-One LED Display Features:

1. Plug and Play: Standard all-in-one display, powered on to auto plays, with program playing via mobile App.;
2. Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting.
3. Easy to Install: Preserves original space structure, supporting hanging, portable stand, and other install ways;
4. High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.
5. Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.

Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	4.8mm、56*298、270*1460
	Pixel LED	SY-ADW1415-T
	Working voltage、Module Power	DC4.6V
	Driving IC、Driving way	ICND2153AN-02、28S
Cabinet Parameter	Cabinet size、Material、Cabinet Weight(kg/Cabinet)	810*1440 (display size) /830*1605(with hanging bar), aluminum profiles extruded, 8.5kg/PC
	Resolution rate、Density	168*298、42921 Dots/m ²
	White balance 、Color temperature	2000 CD/m ² 、6500-9000K
	view angel、Non-Flatness、Module interval	H: 160°; V: 160°、<0.2mm、<0.2mm
	Maximal power/m ² 、Average power/m ² 、Transparency (%)	≤800W/m ² 、≤260W/m ² 、≥80%
	Frame frequency、Refresh frequency、Gray grade	50/60Hz、≥1920Hz、13bit
	Control system	Colorlight
	Working temperature、Protection grade	-20~50°C、IP20

Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co., Ltd.








Packaging parameters:

Gross Weight (kg)	11.5kg (Estimated data,2PCS /Case)
Outer Package Size	1637*126*877mm (Estimated data,2PCS /Case)
Packing Material	Carton+Pearl cotton







Installation Instructions:




- ① Lifting Ring

- ② Hanging Chain

- ③ Lock Buckle

- ④ Lifting Ring Connect Plate

- ⑤ Built-in Wireless Receiver

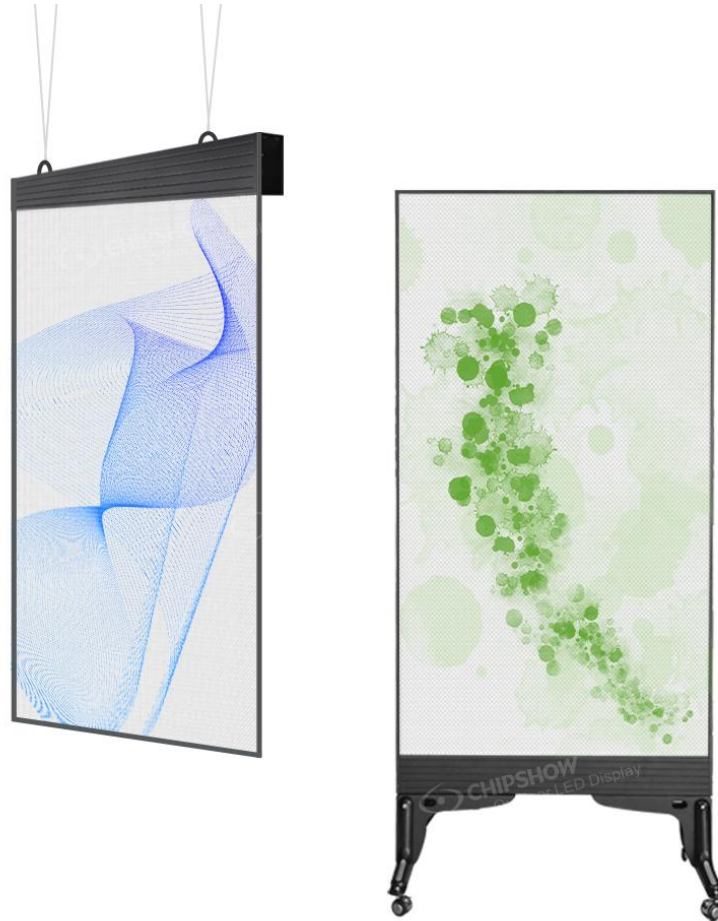- ⑥ Sealing Frame

- ⑦ Display Panel




- ① Display Panel

- ② Sealing Frame

- ③ Built-in Wireless Receiver

- ④ Bracket


C-Mesh-P6.25 Invisible Mesh LED Display

Cabinet



Invisible Mesh All-in-One LED Display Features:

1. Plug and Play: Standard all-in-one display, powered on to auto plays, with program playing via mobile App.;
2. Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting.
3. Easy to Install: Preserves original space structure, supporting hanging, portable stand, and other install ways;
4. High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.
5. Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.

Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	6.25mm、40x192、250*1200
	Pixel LED	DH-C1717IBNR-LA
	Working voltage、Module Power	DC4.6V
	Driving IC、Driving way	LS9001、Static
Cabinet Parameter	Cabinet size、Material、Cabinet Weight(kg/Cabinet)	750*1200 (display size) /771*1369、Aluminum、5kg/PC
	Resolution rate、Density	120x192、25600 Dots/m ²
	White balance 、Color temperature	3500 CD/m ² 、6500-8000K
	view angel、Non-Flatness、Module interval	H: 160°; V: 160°、<0.5mm、<0.5mm
	Maximal power/m ² 、Average power/m ² 、Transparency (%)	≤650W/m ² 、≤200W/m ² 、≥90%
	Frame frequency、Refresh frequency、Gray grade	50/60Hz、3840Hz、13bit
	Control system	SYSOLUTION
	Working temperature、Protection grade	-20~50°C、IP20

Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co., Ltd.

Packaging parameters:

Gross Weight (kg)	11.5kg (Estimated data,2PCS /Case)
Outer Package Size	1380*126*790mm (Estimated data,2PCS /Case)
Packing Material	Carton+Pearl cotton



Installation Instructions:



Android
APP Download



IOS
APP Download



APP User Manual

110-220V
Socket

with program playing
via mobile App

① Lifting Ring



② Hanging Chain



③ Lock Buckle



④ Lifting Ring
Connect Plate




⑤ Built-in Wireless
Receiver



⑥ Sealing Frame




⑦ Display Panel



110-220V
Socket

with program playing
via mobile App

① Display Panel



② Sealing Frame



③ Built-in Wireless
Receiver



④ Bracket

