


# C-Mesh-P3.91 Invisible Mesh LED Display

## Cabinet

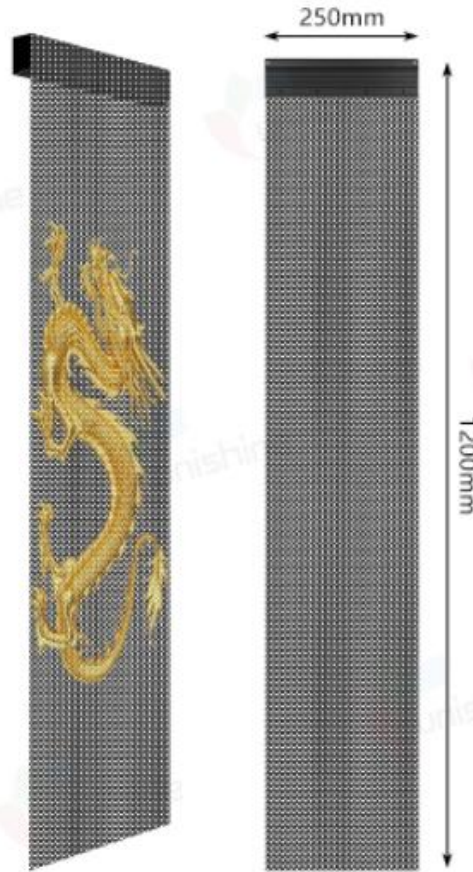

### Invisible Mesh LED Display:

- 1、 Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
- 2、 Easy to Install: Preserves original space structure, supporting hanging, embedded installations;
- 3、 Tailor Match: Customizable screen size to seamlessly integrate with store window dimensions. Etc;
- 4、 Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.
- 5、 High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.

### Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、 size	3.91mm、 64x307、 250*1200
	Pixel LED	DH-C1717IBANR-LA
	Working voltage、 Module Power	DC4.6V
	Driving IC、 Driving way	LS9001、 Static
Cabinet Parameter	Cabinet size、 Material、 Cabinet Weight(kg/Cabinet)	250*1200、 Aluminum、 5kg/m <sup>2</sup>
	Resolution rate、 Density	64x307、 65536 Dots/m <sup>2</sup>
	White balance 、 Color temperature	3500 CD/m <sup>2</sup> 、 6500-9000K
	view angel、 Non-Flatness、 Module interval	H: 160°; V: 160°、 <0.5mm、 <0.5mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup> 、 Transparency (%)	≤850W/m <sup>2</sup> 、 ≤300W/m <sup>2</sup> 、 ≥80%
	Frame frequency、 Refresh frequency、 Gray grade	50/60Hz、 3840Hz、 13bit
	Installation method	Colorlight
	Working temperature、 Protection grade	-20~50℃、 IP20


Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.

### Packaging parameters:

Gross Weight ( kg )	15kg ( Estimated data,8pcs /Case )
Outer Package Size	1500*350*300mm ( Estimated data,8pcs /Case )
Packing Material	Carton+Pearl cotton +wooden pallet




**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

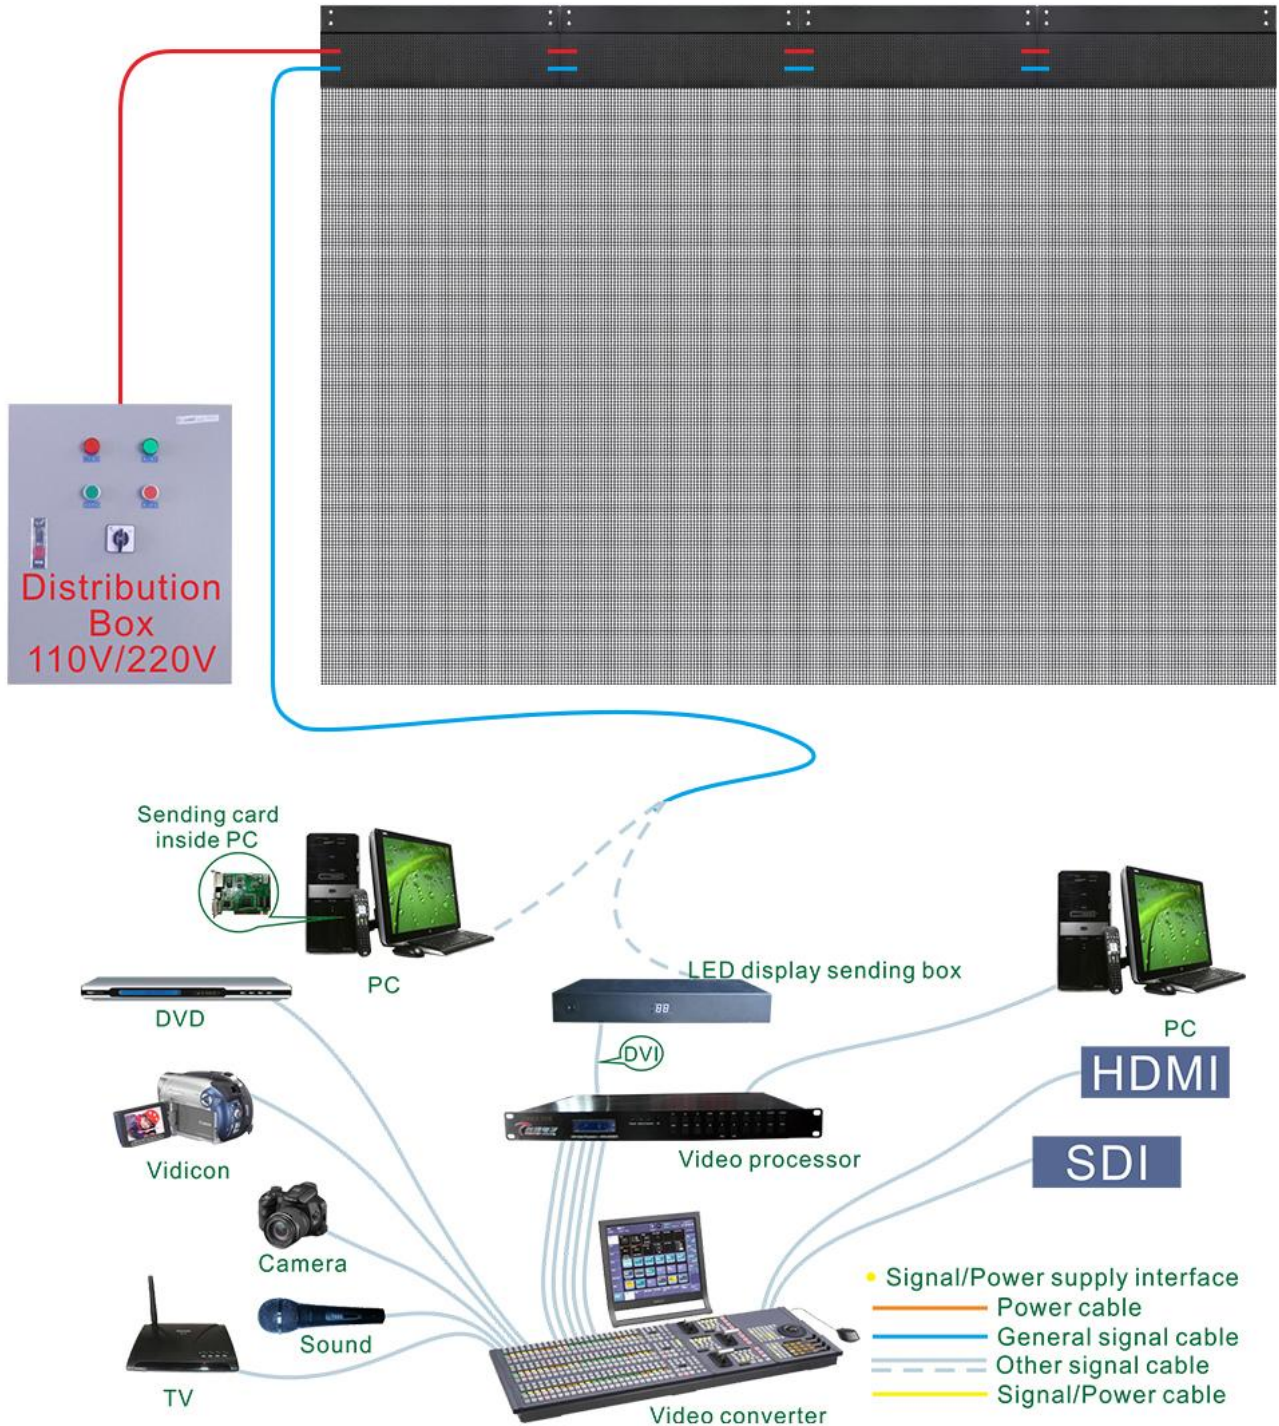

# C-Mesh-P3.91 Invisible Mesh LED Display

**Cabinet**

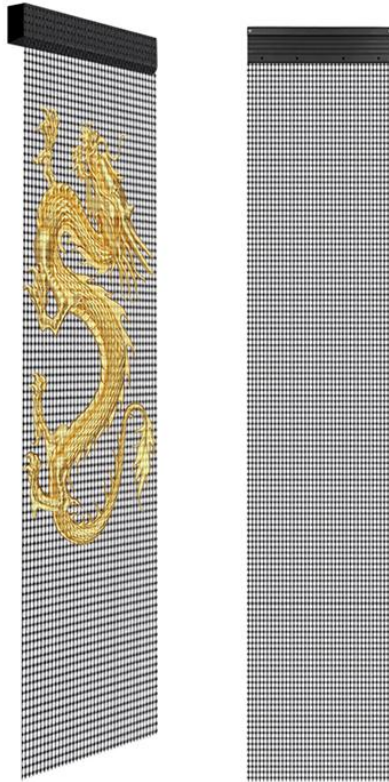

## **Invisible Mesh LED Display:**

- 1、 Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
- 2、 Easy to Install: Preserves original space structure, supporting hanging, embedded installations;
- 3、 Tailor Match: Customizable screen size to seamlessly integrate with store window dimensions. Etc;
- 4、 Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.
- 5、 High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.

### Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、 size	3.91mm、 64x384、 250*1500
	Pixel LED	DH-C1717IBANR-LA
	Working voltage、 Module Power	DC4.6V
	Driving IC、 Driving way	LS9001、 Static
Cabinet Parameter	Cabinet size、 Material、 Cabinet Weight(kg/Cabinet)	258*1502mm、 Aluminum、 ≤5.3kg/m <sup>2</sup>
	Resolution rate、 Density	64*384、 65536 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥3500 CD/m <sup>2</sup> 、 6500-9000K
	view angel、 Non-Flatness、 Module interval	H: 160°; V: 160°、 <0.5mm、 <0.5mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup> 、 Transparency (%)	≤850W/m <sup>2</sup> 、 ≤300W/m <sup>2</sup> 、 ≥90%
	Frame frequency、 Refresh frequency、 Gray grade	50/60Hz、 ≥3840Hz、 16bit
	Installation method	Colorlight
	Working temperature、 Protection grade	-20~50℃、 IP20


Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.

### Packaging parameters:

Gross Weight ( kg )	15kg ( Estimated data,8pcs /Case )
Outer Package Size	1500*350*300mm ( Estimated data,8pcs /Case )
Packing Material	Carton+Pearl cotton +wooden pallet




**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

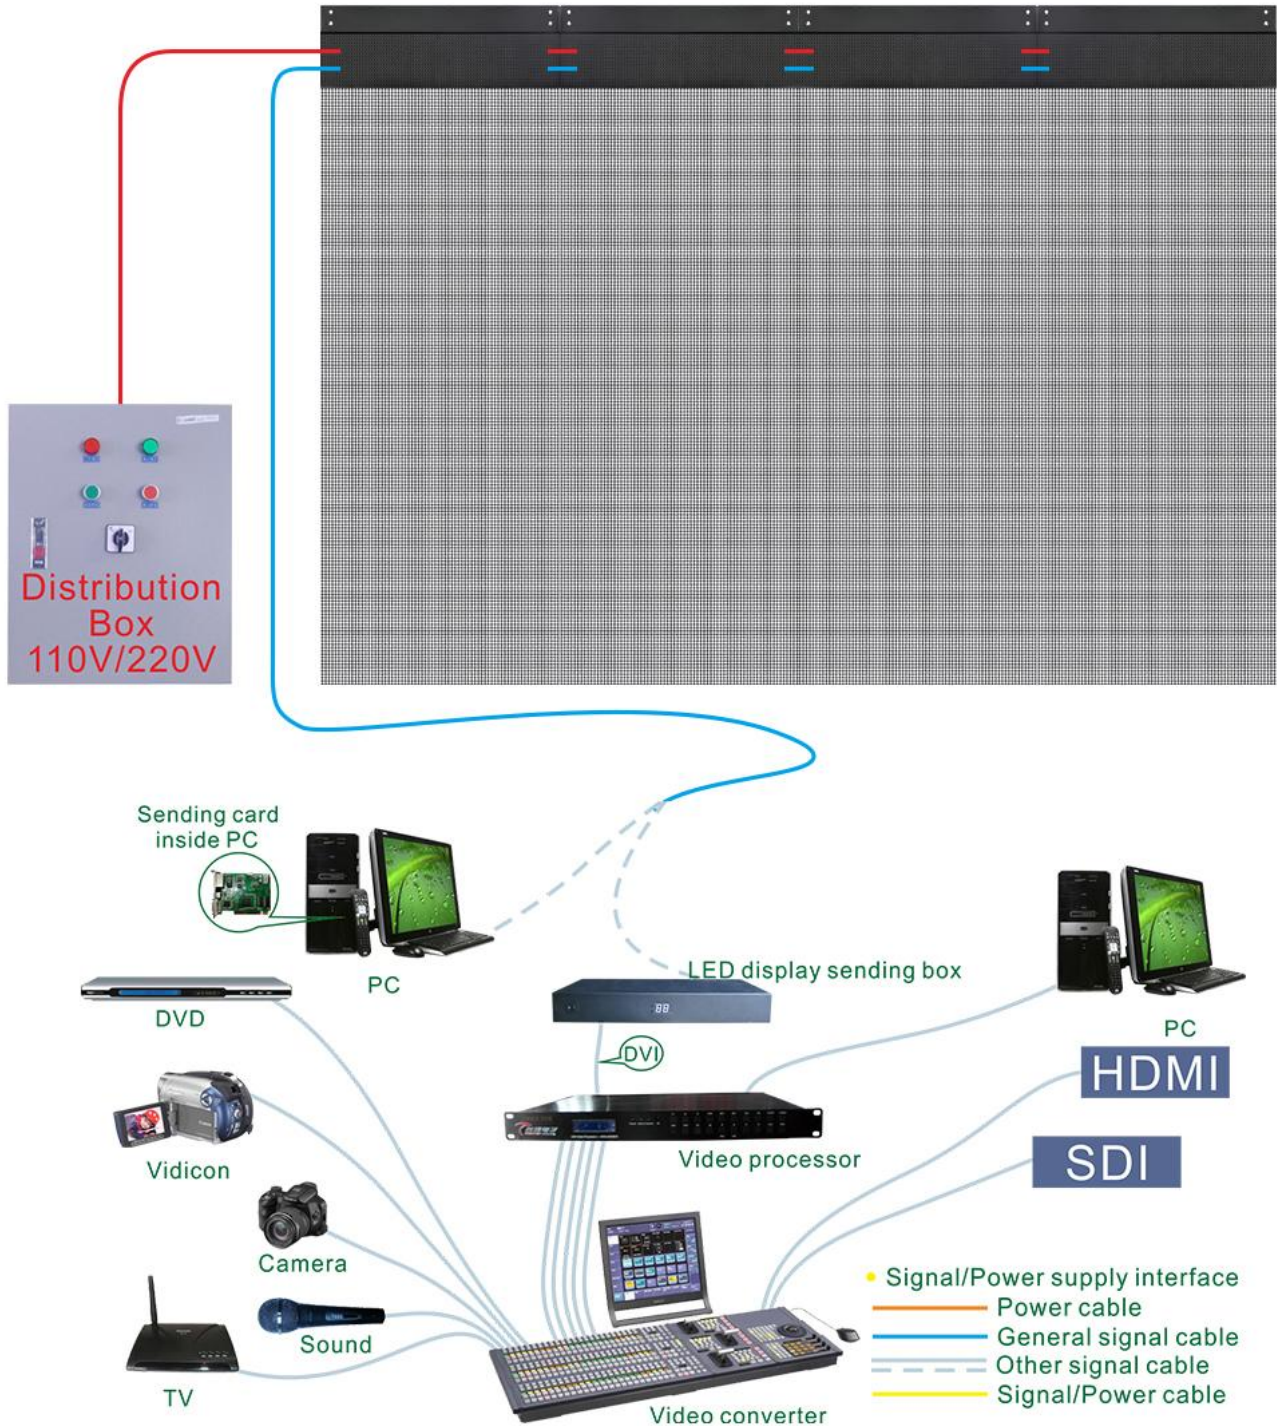

# C-Mesh-P4.81 Invisible Mesh LED Display

## Cabinet

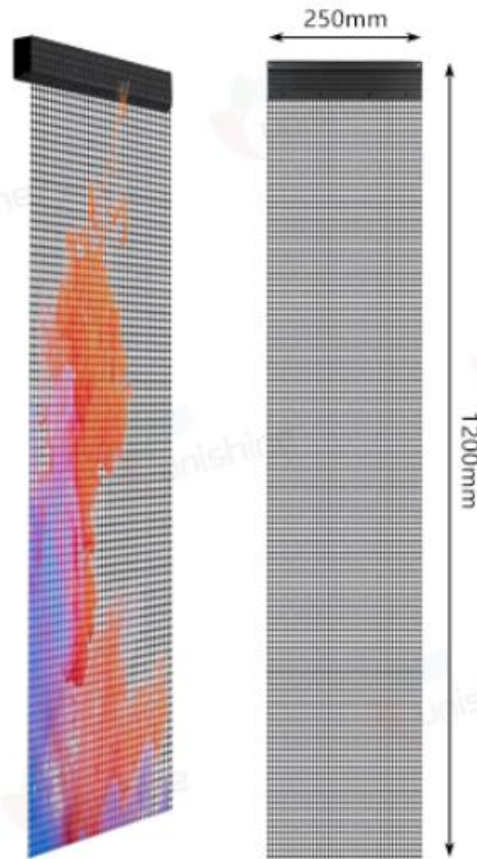

### Invisible Mesh LED Display:

- 1、 Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
- 2、 Easy to Install: Preserves original space structure, supporting hanging, embedded installations;
- 3、 Tailor Match: Customizable screen size to seamlessly integrate with store window dimensions. Etc;
- 4、 Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.
- 5、 High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、 size	4.81mm、 52x250、 250*1200
	Pixel LED	DH-C1717IBANR-LA
	Working voltage、 Module Power	DC4.6V
	Driving IC、 Driving way	LS9001、 Static
Cabinet Parameter	Cabinet size、 Material、 Cabinet Weight(kg/Cabinet)	250*1200、 Aluminium alloy、 5kg/m <sup>2</sup>
	Resolution rate、 Density	52x250、 43258 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥3500 CD/m <sup>2</sup> 、 6500-9000K
	view angel、 Non-Flatness、 Module interval	H: 160°; V: 160°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup> 、 Transparency (%)	≤800W/m <sup>2</sup> 、 ≤300W/m <sup>2</sup> 、 ≥58%
	Frame frequency、 Refresh frequency、 Gray grade	50/60Hz、 ≥3840Hz、 16bit
	Installation method	Colorlight
	Working temperature、 Protection grade	-20~65°C、 IP20
Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.		

### Packaging parameters:

Gross Weight ( kg )	15kg ( Estimated data,8pcs /Case )
Outer Package Size	1500*350*300mm ( Estimated data,8pcs /Case )
Packing Material	Carton+Pearl cotton +wooden pallet




**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

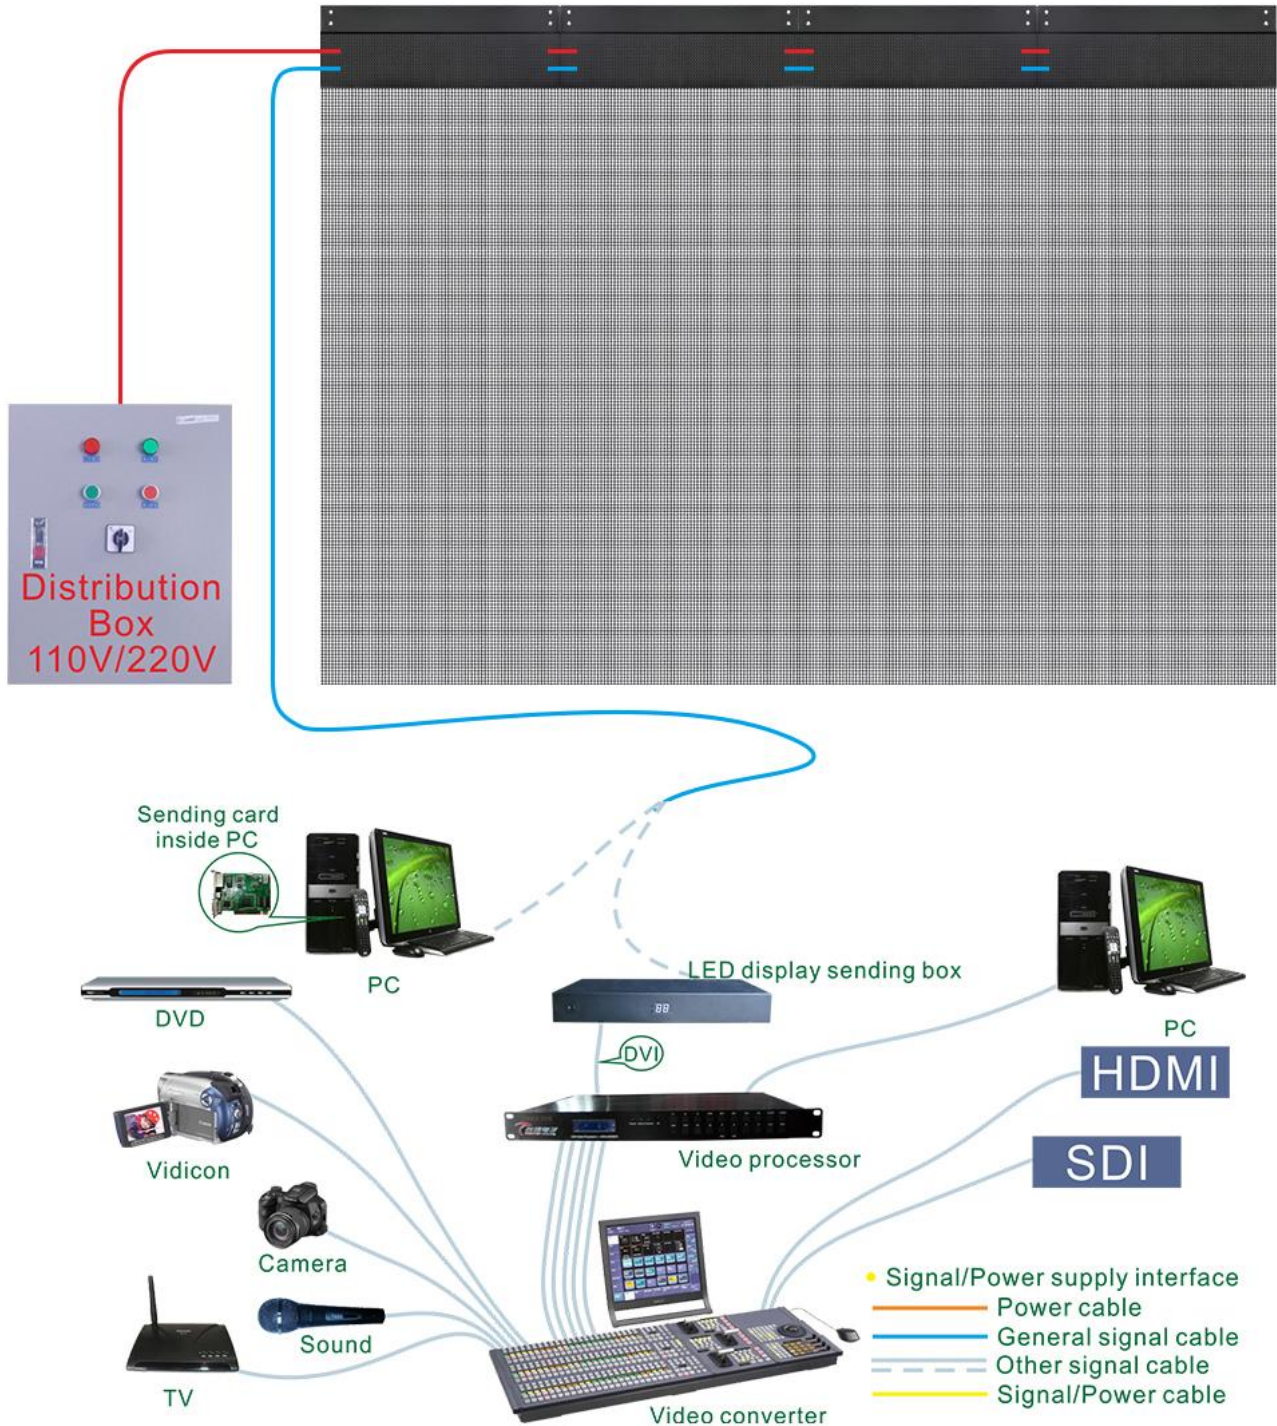

# C-Mesh-P6.25 Invisible Mesh LED Display

## Cabinet

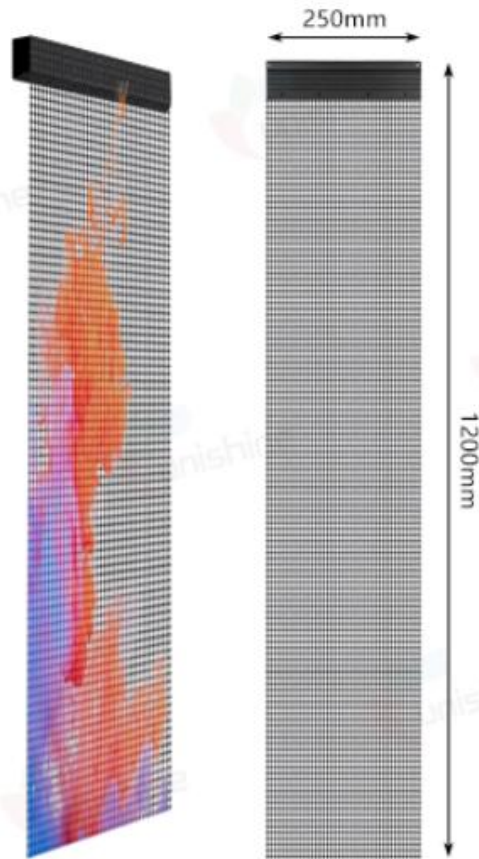

### Invisible Mesh LED Display:

- 1、 Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
- 2、 Easy to Install: Preserves original space structure, supporting hanging, embedded installations;
- 3、 Tailor Match: Customizable screen size to seamlessly integrate with store window dimensions. Etc;
- 4、 Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.
- 5、 High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、 size	6.25mm、 40x192、 250*1200
	Pixel LED	DH-C1717IBANR-LA
	Working voltage、 Module Power	DC4.6V
	Driving IC、 Driving way	LS9001、 Static
Cabinet Parameter	Cabinet size、 Material、 Cabinet Weight(kg/Cabinet)	250*1200、 Aluminium alloy、 5kg/m <sup>2</sup>
	Resolution rate、 Density	40x192、 25600 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥3500 CD/m <sup>2</sup> 、 6500-9000K
	view angel、 Non-Flatness、 Module interval	H: 160°; V: 160°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup> 、 Transparency (%)	≤700W/m <sup>2</sup> 、 ≤250W/m <sup>2</sup> 、 ≥90%
	Frame frequency、 Refresh frequency、 Gray grade	50/60Hz、 3840Hz、 13bit
	Installation method	Colorlight
	Working temperature、 Protection grade	-20~50℃、 IP20
Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.		

### Packaging parameters:

Gross Weight ( kg )	15kg ( Estimated data,8pcs /Case )
Outer Package Size	1500*350*300mm ( Estimated data,8pcs /Case )
Packing Material	Carton+Pearl cotton +wooden pallet




**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

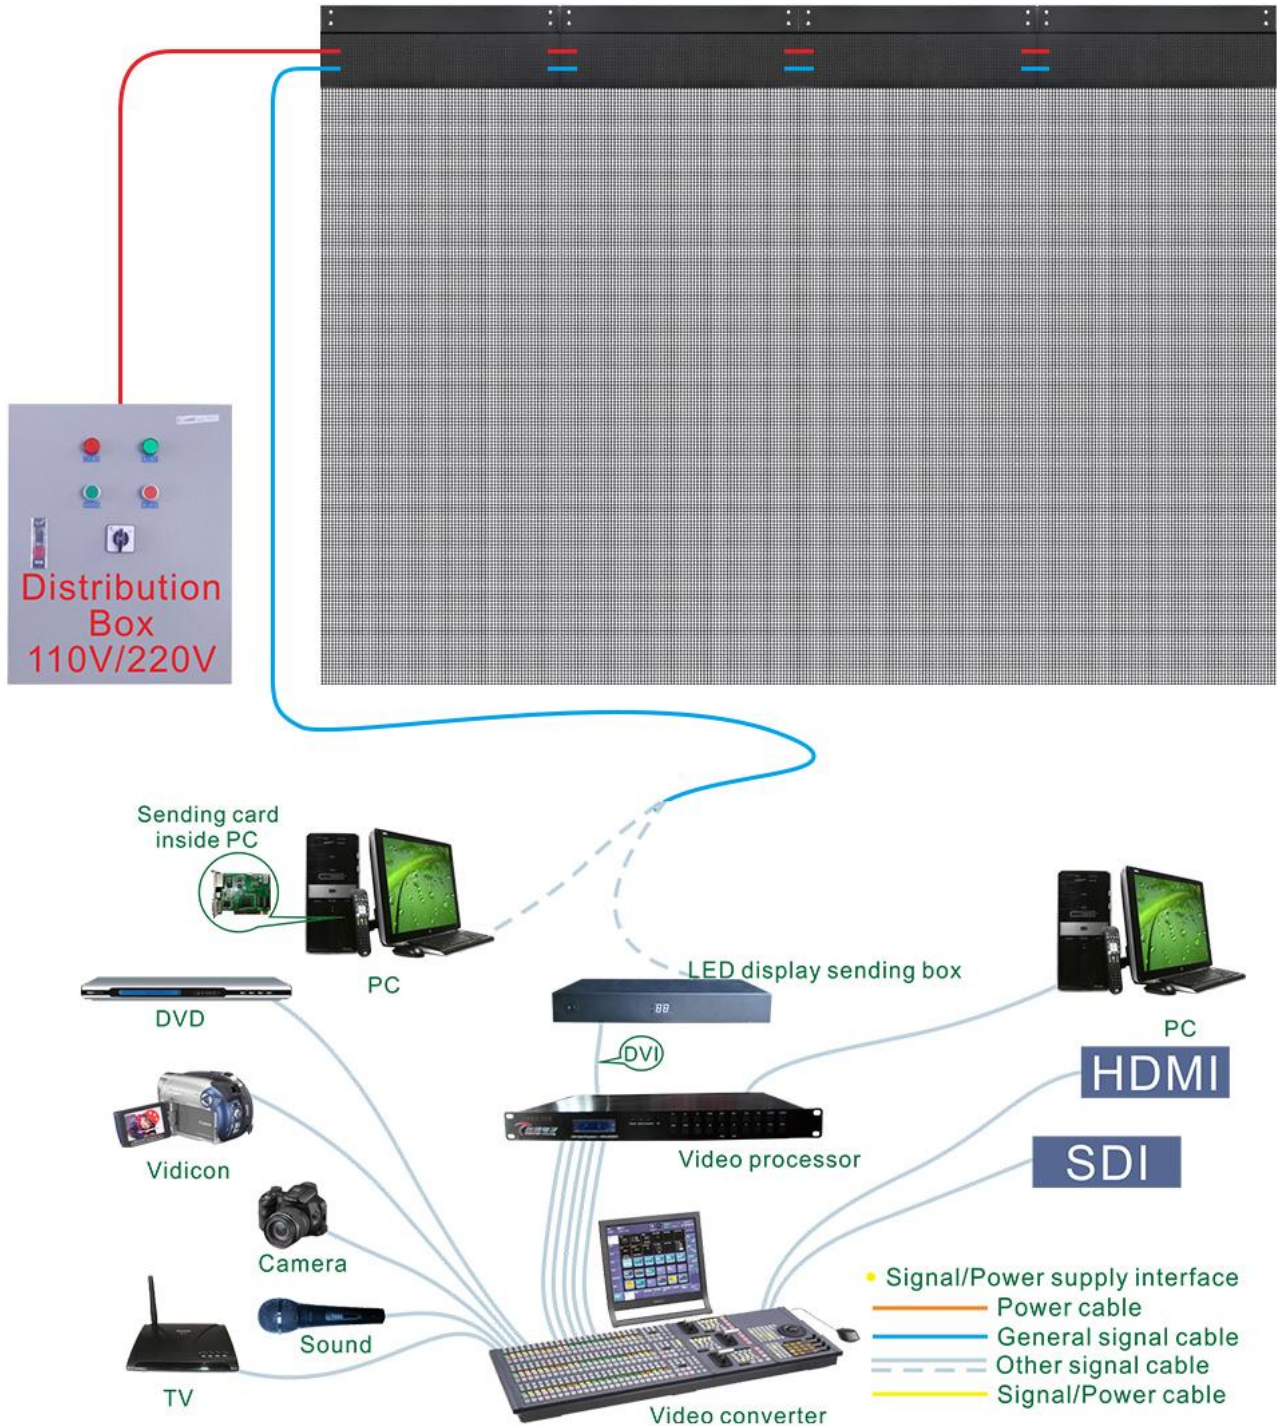

# C-Mesh-P6.25 Invisible Mesh LED Display

## Cabinet

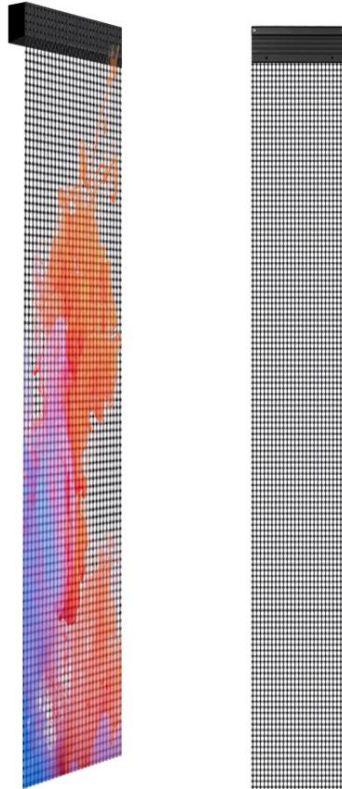

### **Invisible Mesh LED Display:**

- 1、 Invisible Design: Invisible mesh screen, no obstruction to visibility or lighting;
- 2、 Easy to Install: Preserves original space structure, supporting hanging, embedded installations;
- 3、 Tailor Match: Customizable screen size to seamlessly integrate with store window dimensions. Etc;
- 4、 Floating Display: Suspended visuals with 3D holographic and naked eye AR effects.
- 5、 High Brightness: Meeting semi-outdoor applications, such as storefront windows, etc.

### Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、 size	6.25mm、 40x320、 250*2000
	Pixel LED	RF-H2SA22HS-A47-IC3-A LED screen integrated driver
	Working voltage、 Module Power	DC4.6V
	Driving IC、 Driving way	TA8028EP、 Static
	Cabinet size、 Material、 Cabinet Weight(kg/Cabinet)	250*2000、 Aluminum、 2kg
Cabinet Parameter	Resolution rate、 Density	40x320、 25600 Dots/m <sup>2</sup>
	White balance 、 Color temperature	≥3000 CD/m <sup>2</sup> 、 6500-9000K
	view angel、 Non-Flatness、 Module interval	H: 160°; V: 160°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup> 、 Transparency (%)	≤800W/m <sup>2</sup> 、 ≤250W/m <sup>2</sup> 、 ≥90%
	Frame frequency、 Refresh frequency、 Gray grade	50/60Hz、 ≥3840Hz、 16bit
	Installation method	Novastar
	Working temperature、 Protection grade	-20~65°C、 IP20
	Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.	

### Packaging parameters:

Gross Weight (kg)	16kg (Estimated data,4pcs /Case)
Outer Package Size	2050*350*300mm (Estimated data,4pcs /Case)
Packing Material	Carton+Pearl cotton +wooden pallet



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

