


## P1.953 Indoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification



**Module**

**Cabinet**



### Features:

1. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness < 79mm.
2. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
3. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
4. Optional arc locks, support -10° to 15° curved screens.
5. Magnetic modules for quick front maintenance.
6. Anti-loosening screws prevent shifting during transport.
7. Single-person installation, quick and cost-effective.
8. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
9. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
10. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	1.953mm、 128*128、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1515
	Working voltage、 Module Power	DC4.5V、 28W
	Driving IC、 Driving way	2153s、 1/32
	HUB	/
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Die-cast aluminum cabinet、 8KG/cabinet
	Resolution rate、 size、 Module quantity	256*256Dots、 500*500*79mm、 2*2
	Density	262144 Dots/m <sup>2</sup>
	White balance 、 Color temperature	600-800CD/m <sup>2</sup> 、 3000K-10000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	500W/m <sup>2</sup> 、 170W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 2880-3840Hz 、 ≥14bit
	Control system、 System supports	CHIPSHOW, Windows XP, WIN 7
	Working temperature、 Protection grade	-20~50℃、 Front/Back: IP40
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters:


Gross Weight (kg)	75kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

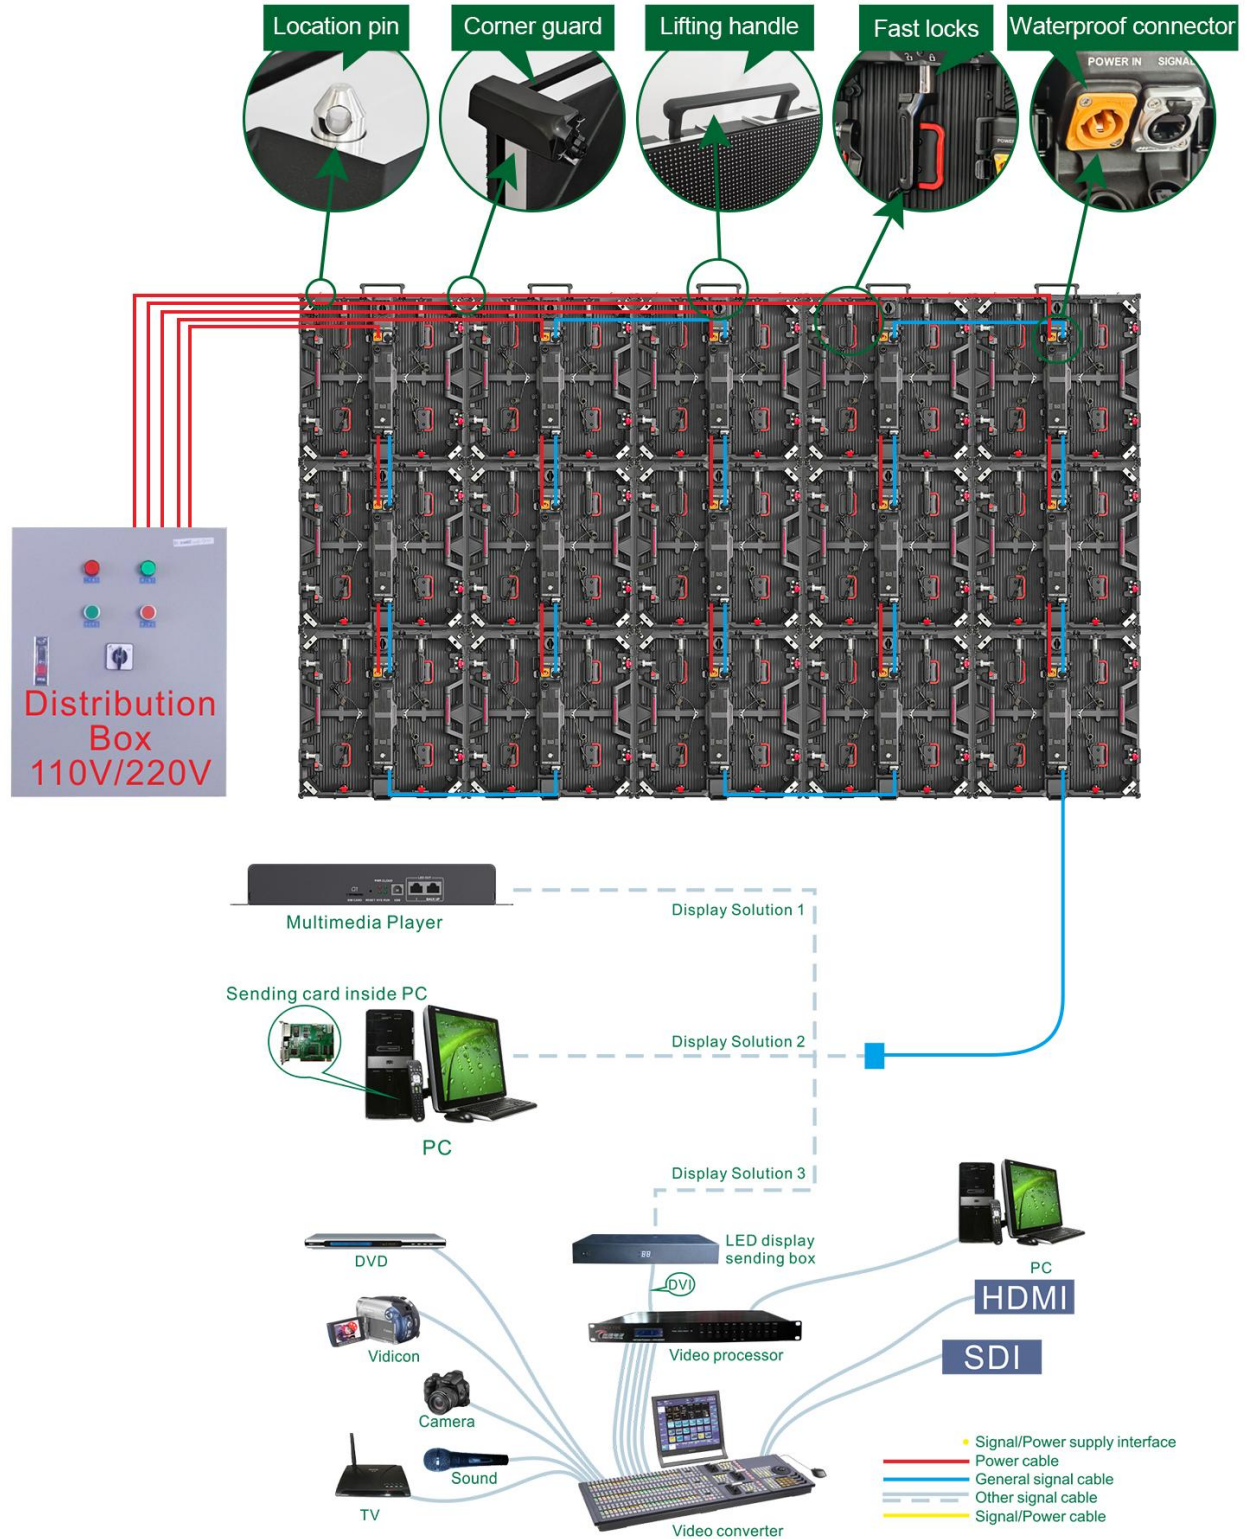

## P2.604 Indoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification



**Module**

**Cabinet**



### Features:

11. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness <79mm.
12. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
13. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
14. Optional arc locks, support -10° to 15° curved screens.
15. Magnetic modules for quick front maintenance.
16. Anti-loosening screws prevent shifting during transport.
17. Single-person installation, quick and cost-effective.
18. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
19. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
20. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	2.604mm、 96*96、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1515
	Working voltage、 Module Power	DC4.5V、 28W
	Driving IC、 Driving way	2153s、 1/32
	HUB	/
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Die-cast aluminum cabinet、 8KG/cabinet
	Resolution rate、 size、 Module quantity	192*192Dots、 500*500*79mm、 2*2
	Density	147456 Dots/m <sup>2</sup>
	White balance 、 Color temperature	800CD/m <sup>2</sup> 、 3000K-10000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	500W/m <sup>2</sup> 、 170W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 2880-3840Hz 、 ≥14bit
	Control system、 System supports	CHIPSHOW, Windows XP, WIN 7
	Working temperature、 Protection grade	-20~50℃、 Front/Back: IP40
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters:


Gross Weight (kg)	75kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

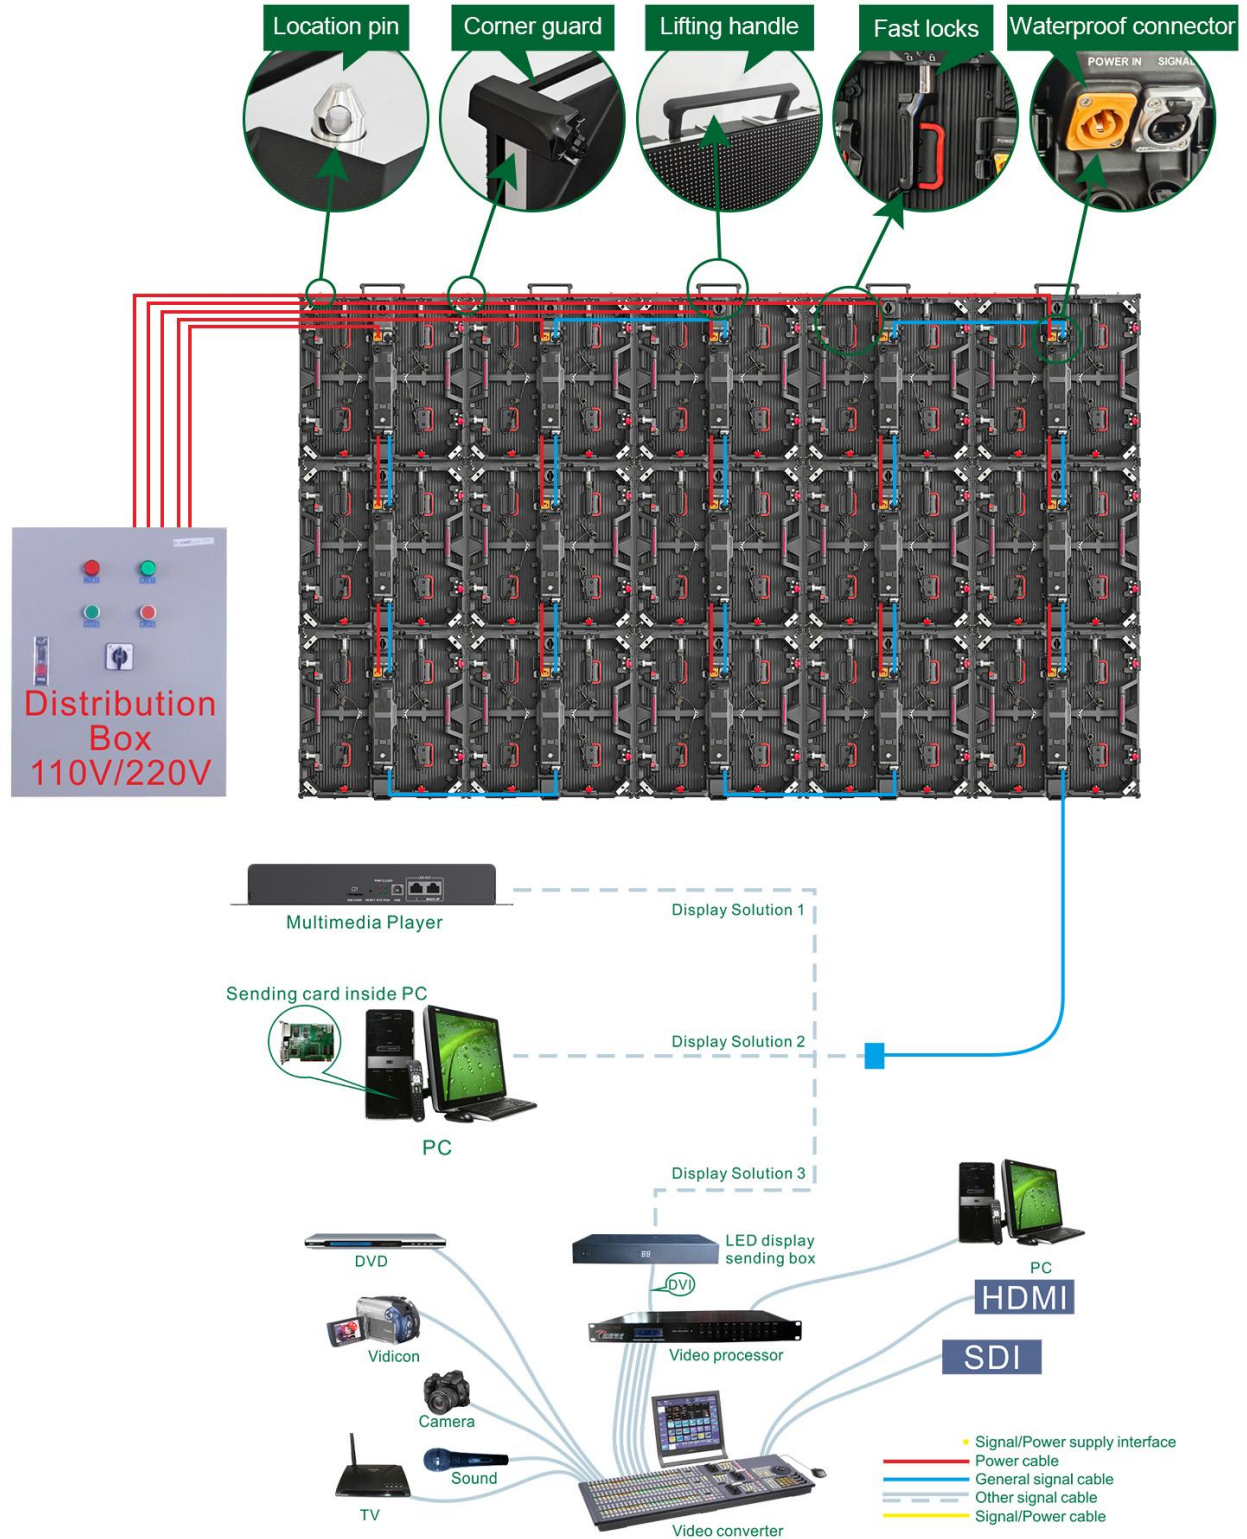

## P2.604 Outdoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification



**Module**

**Cabinet**



### Features:

21. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness < 79mm.
22. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
23. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
24. Optional arc locks, support -10° to 15° curved screens.
25. Magnetic modules for quick front maintenance.
26. Anti-loosening screws prevent shifting during transport.
27. Single-person installation, quick and cost-effective.
28. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
29. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
30. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	2.604mm、 96*96、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1415
	Working voltage、 Module Power	DC4.5V、 32W
	Driving IC、 Driving way	2153s、 1/24
	HUB	/
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Die-cast aluminum cabinet、 8KG/cabinet
	Resolution rate、 size、 Module quantity	192*192Dots、 500*500*79mm、 2*2
	Density	147456 Dots/m <sup>2</sup>
	White balance 、 Color temperature	4000-4500CD/m <sup>2</sup> 、 3000K-10000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	520W/m <sup>2</sup> 、 180W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 7680Hz 、 ≥14bit
	Control system、 System supports	CHIPSHOW, Windows XP, WIN 7
	Working temperature、 Protection grade	-20~50℃、 Front: IP65/Back: IP54
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters:


Gross Weight (kg)	77kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

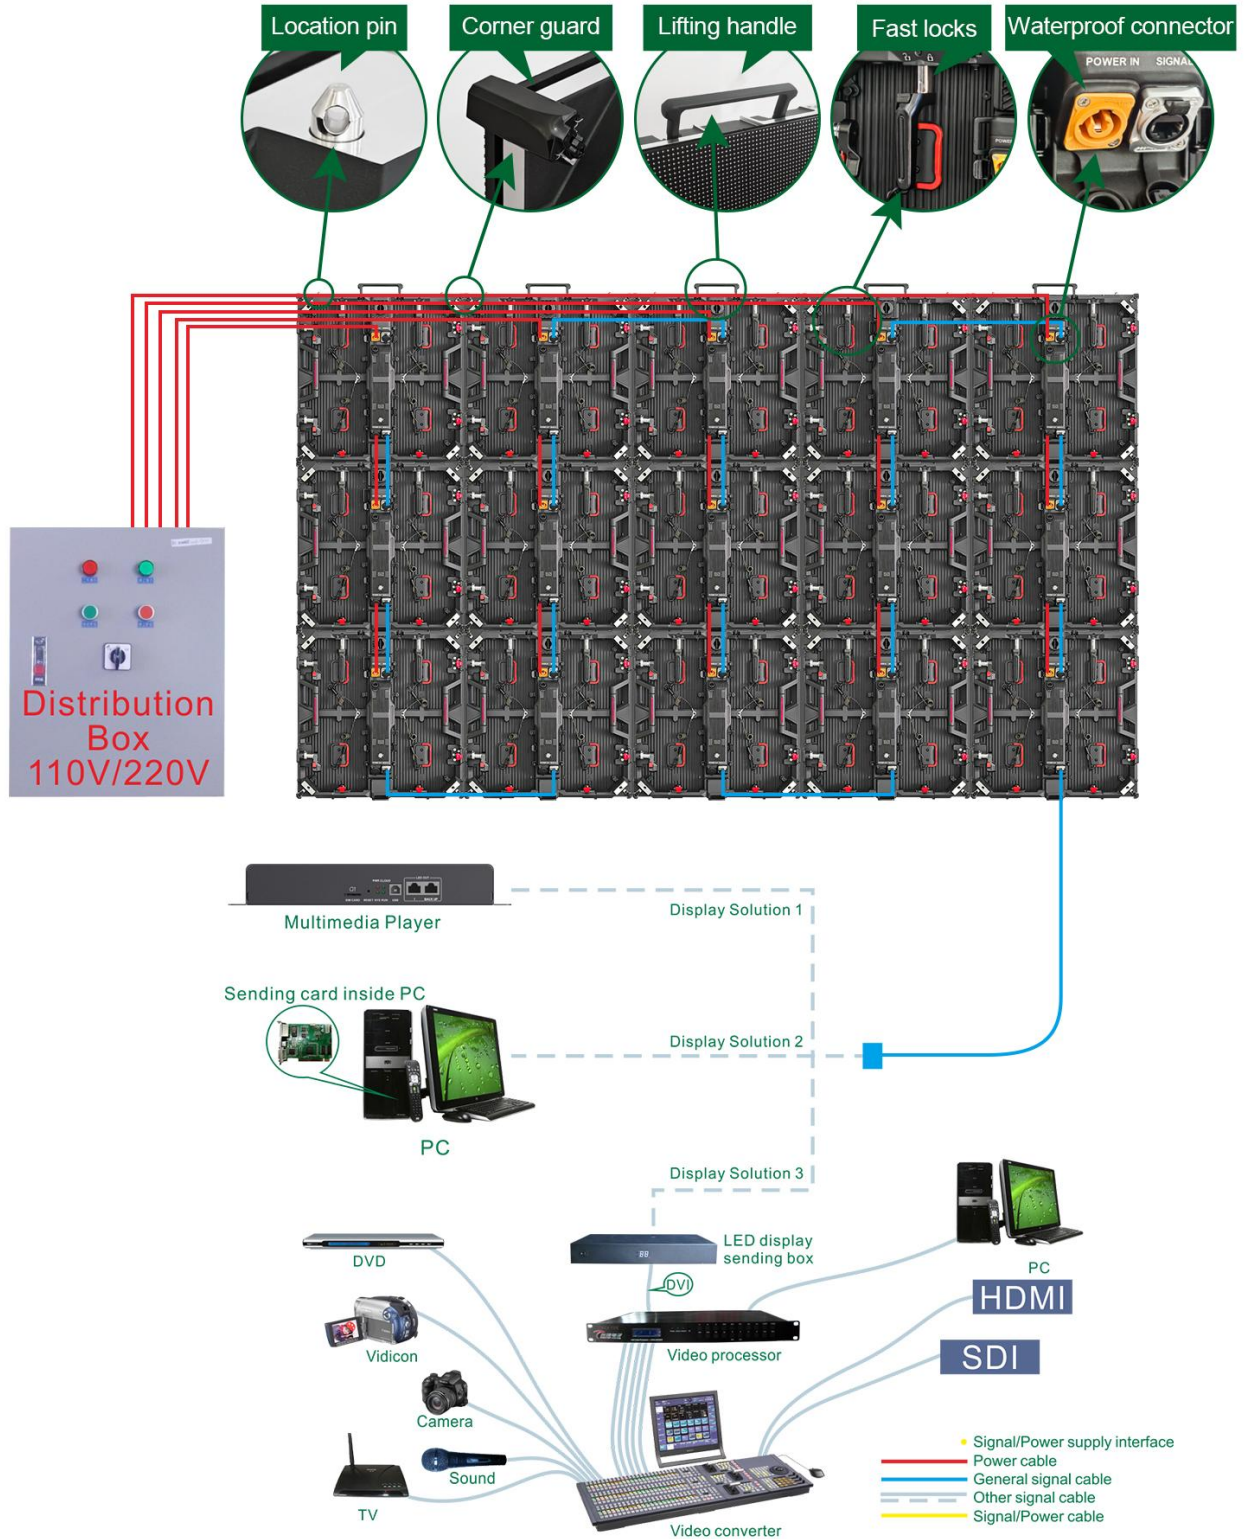

## P2.97 Indoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification

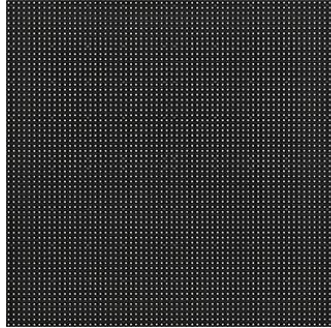

**Module**

**Cabinet**



### Features:

31. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness <79mm.
32. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
33. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
34. Optional arc locks, support -10° to 15° curved screens.
35. Magnetic modules for quick front maintenance.
36. Anti-loosening screws prevent shifting during transport.
37. Single-person installation, quick and cost-effective.
38. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
39. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
40. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	2.976mm、 84*84、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD2020
	Working voltage、 Module Power	DC4.5V、 28W
	Driving IC、 Driving way	2153s、 1/28
	HUB	/
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		168*168Dots、 500*500*79mm、 2*2
Density		112896 Dots/m <sup>2</sup>
White balance 、 Color temperature		800CD/m <sup>2</sup> 、 3000K-10000K
view angel、 Non-Flatness、 Module interval		H/V: 120°/120°、 <0.2mm、 <0.2mm
Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>		500W/m <sup>2</sup> 、 170W/m <sup>2</sup>
Frame frequency、 Refresh frequency、 Gray grade		60Hz、 2880-3840Hz 、 ≥14bit
Control system、 System supports		CHIPSHOW, Windows XP, WIN 7
Working temperature、 Protection grade		-20~50℃、 Front/Back: IP40
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters:


Gross Weight (kg)	75kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

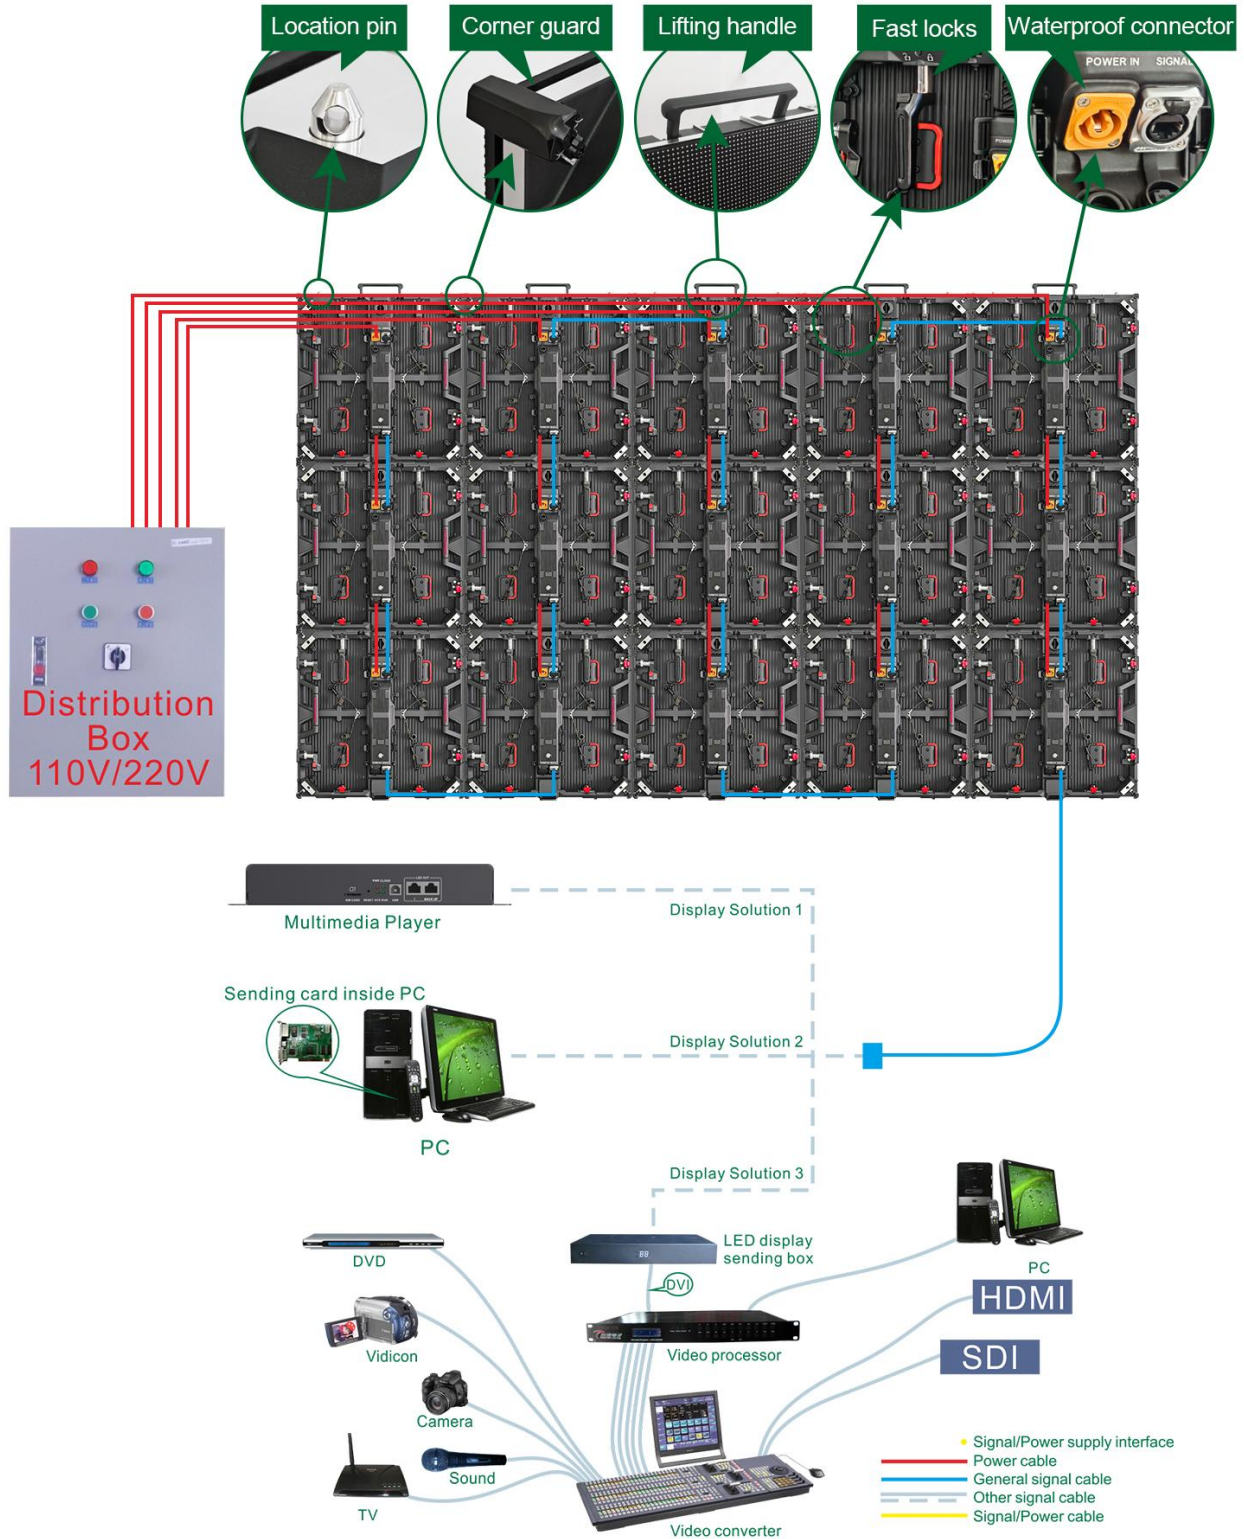

## P2.97 Outdoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification



**Module**

**Cabinet**



### Features:

41. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness < 79mm.
42. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
43. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
44. Optional arc locks, support -10° to 15° curved screens.
45. Magnetic modules for quick front maintenance.
46. Anti-loosening screws prevent shifting during transport.
47. Single-person installation, quick and cost-effective.
48. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
49. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
50. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	2.976mm、 84*84、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1415
	Working voltage、 Module Power	DC4.5V、 32W
	Driving IC、 Driving way	2153s、 1/21
	HUB	HUB(AXS-500X500)-V1.0
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		168*168Dots、 500*500*79mm、 2*2
Density		112896 Dots/m <sup>2</sup>
White balance 、 Color temperature		4000-4300CD/m <sup>2</sup> 、 3000K-10000K
view angel、 Non-Flatness、 Module interval		H/V: 120°/120°、 <0.2mm、 <0.2mm
Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>		520W/m <sup>2</sup> 、 180W/m <sup>2</sup>
Frame frequency、 Refresh frequency、 Gray grade		60Hz、 7680Hz 、 ≥14bit
Control system、 System supports		CHIPSHOW, Windows XP, WIN 7
Working temperature、 Protection grade		-20~50℃、 Front: IP65/Back: IP54
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters:


Gross Weight (kg)	77kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

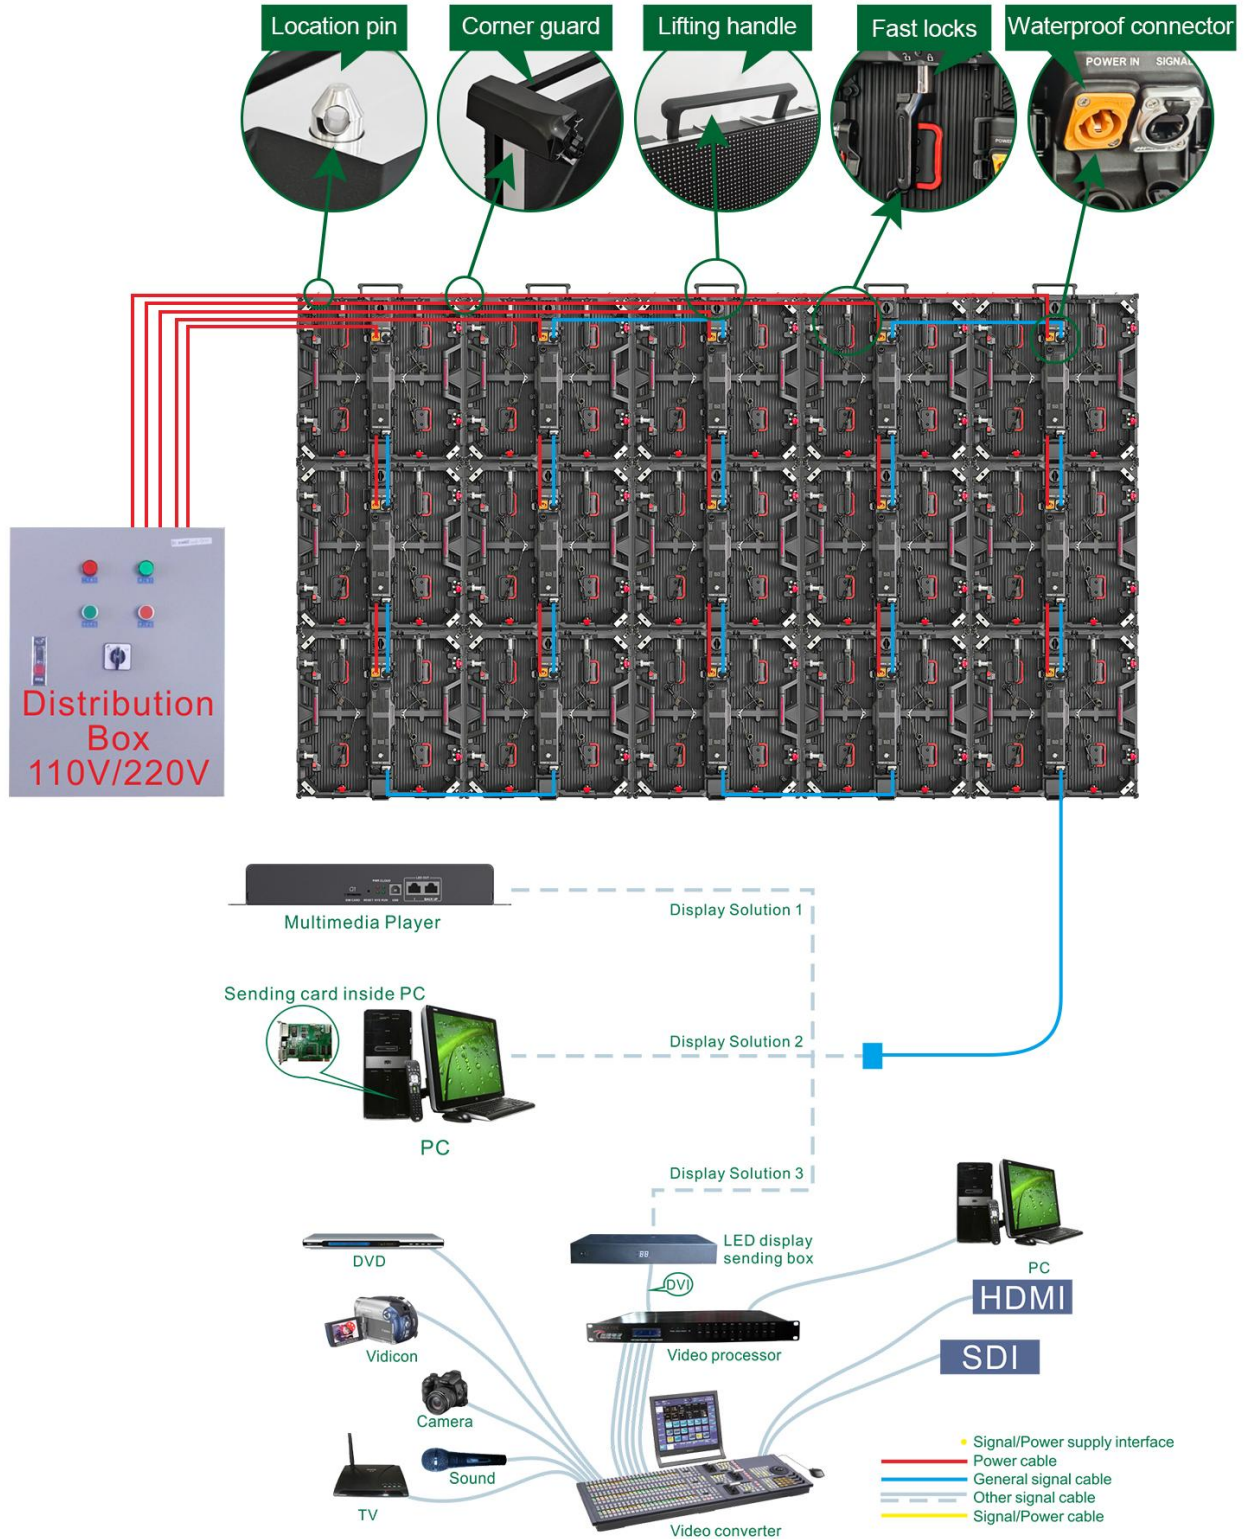

## P3.91 Indoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification



**Module**

**Cabinet**



### Features:

51. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness <79mm.
52. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
53. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
54. Optional arc locks, support -10° to 15° curved screens.
55. Magnetic modules for quick front maintenance.
56. Anti-loosening screws prevent shifting during transport.
57. Single-person installation, quick and cost-effective.
58. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
59. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
60. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	3.91mm、 64*64、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD2020
	Working voltage、 Module Power	DC4.5V、 28W
	Driving IC、 Driving way	2153s、 1/16
	HUB	/
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		128*128Dots、 500*500*79mm、 2*2
Density		65536 Dots/m <sup>2</sup>
White balance 、 Color temperature		800CD/m <sup>2</sup> 、 6000K-8000K
view angel、 Non-Flatness、 Module interval		H/V: 120°/120°、 <0.2mm、 <0.2mm
Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>		500W/m <sup>2</sup> 、 170W/m <sup>2</sup>
Frame frequency、 Refresh frequency、 Gray grade		60Hz、 2880-3840Hz 、 ≥14bit
Control system、 System supports		CHIPSHOW, Windows XP, WIN 7
Working temperature、 Protection grade		-20~50℃、 Front/Back: IP40
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters:


Gross Weight (kg)	75kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

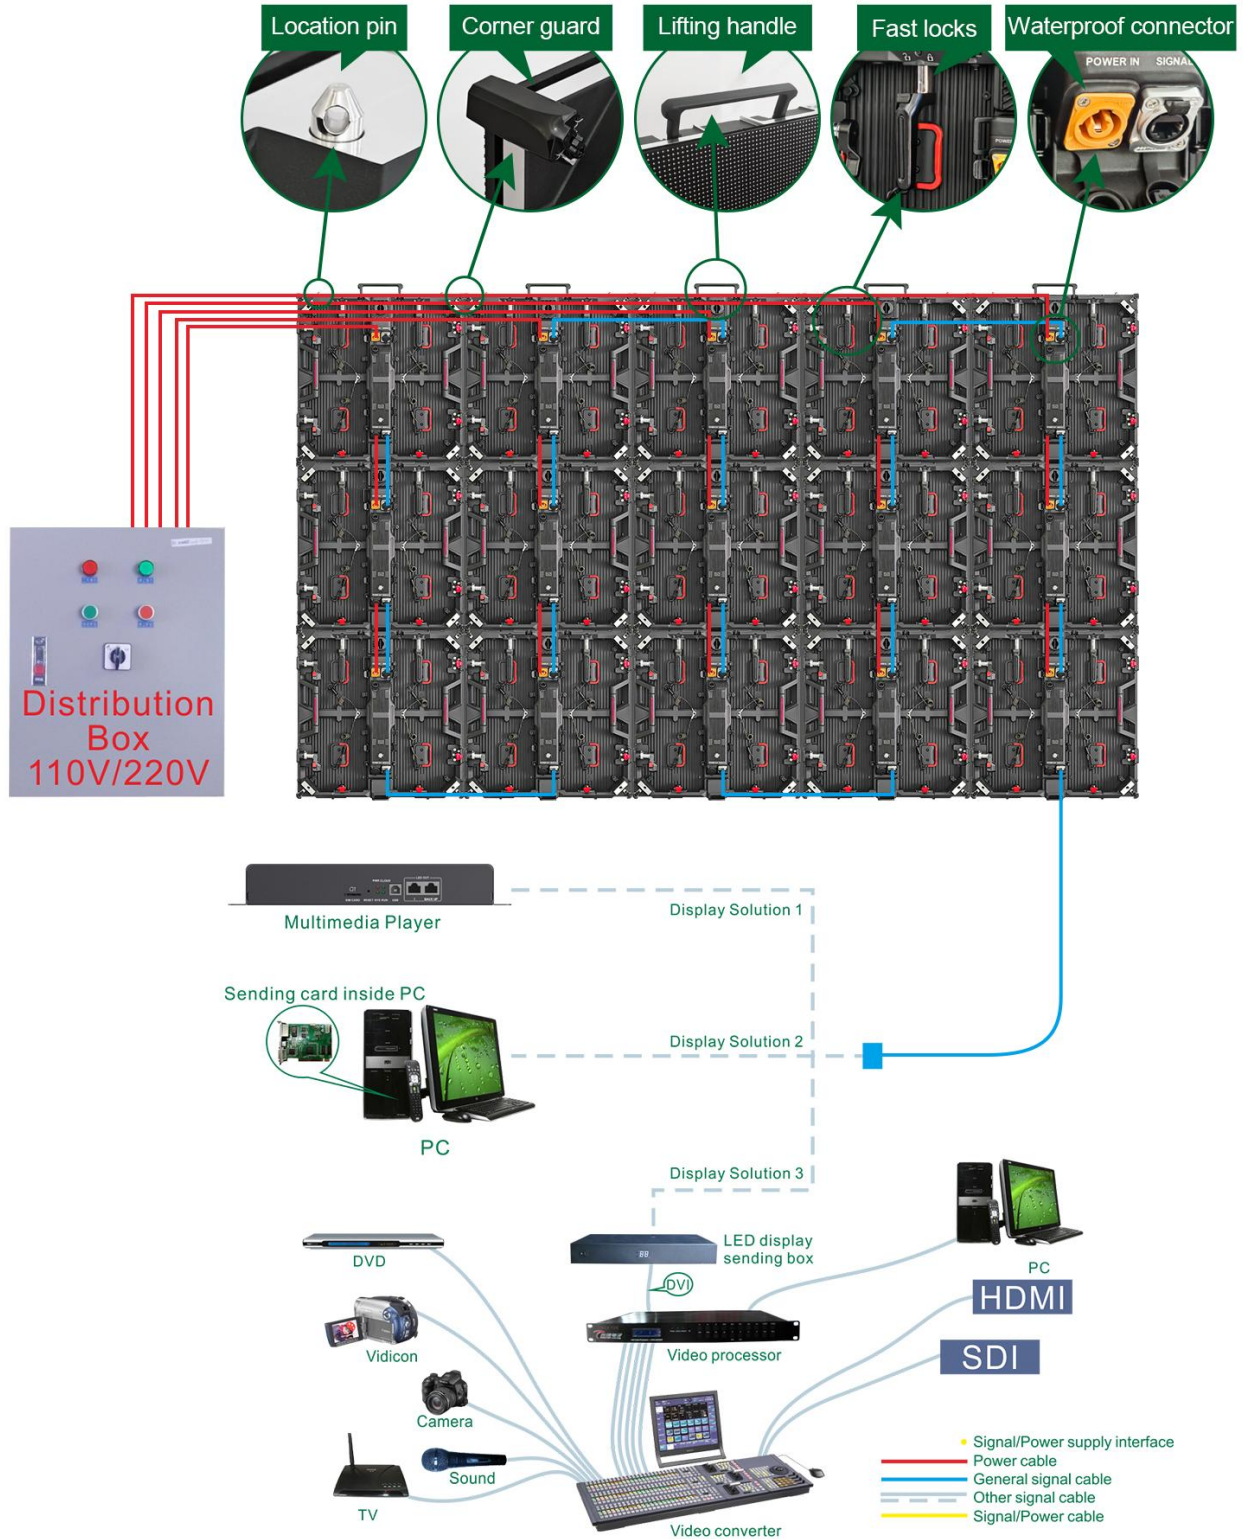

## P3.91 Outdoor 500\*500 Die-Cast Aluminum Rental Full Color LED Display Specification



**Module**

**Cabinet**



### Features:

61. High-precision die-cast aluminum cabinet, 500\*500mm≤8kg/cabinet, thickness < 79mm.
62. Compatible 500x500mm and 500x1000mm cabinets for vertical splicing.
63. Both 500mm and 1000mm cabinets feature quick-release control boxes for fast assembly and disassembly.
64. Optional arc locks, support -10° to 15° curved screens.
65. Magnetic modules for quick front maintenance.
66. Anti-loosening screws prevent shifting during transport.
67. Single-person installation, quick and cost-effective.
68. Silent operation: fanless with noise ≤40dB, no interference with on-site audio-visual effects.
69. Ideal for large backdrop screens: high refresh rate, no flicker&ghosting during DSLR or camera shutter speeds of 1/3000s.
70. Versatile pixel pitches for indoor (P3.91/2.97/2.604/1.95, etc.) and outdoor (P2.604/2.97/3.9/4.8, etc) applications, ideal for events, conferences, and stage performances.

### Technical Parameters :

	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	3.91mm、 64*64、 250*250*16mm
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、 Module Power	DC4.5V、 45W
	Driving IC、 Driving way	2153s、 1/16
	HUB	/
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Die-cast aluminum cabinet、 8KG/cabinet
	Resolution rate、 size、 Module quantity	128*128Dots、 500*500*79mm、 2*2
	Density	65536 Dots/m <sup>2</sup>
	White balance 、 Color temperature	4000-4500CD/m <sup>2</sup> 、 6000K-8000K
	view angel、 Non-Flatness、 Module interval	H/V: 120°/120°、 <0.2mm、 <0.2mm
	Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>	520W/m <sup>2</sup> 、 180W/m <sup>2</sup>
	Frame frequency、 Refresh frequency、 Gray grade	60Hz、 7680Hz 、 ≥14bit
	Control system、 System supports	CHIPSHOW, Windows XP, WIN 7
	Working temperature、 Protection grade	-20~50℃、 Front: IP65/Back: IP54
<b>*Reference information, different configurations, different parameters</b>		

### Package Parameters :

Gross Weight (kg)	77kg (Estimated data,8pcs /Case)
Outer Package Size	937*580*747mm (Estimated data,8pcs /Case)
Packaging Material	flight case * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

