



P1.953 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

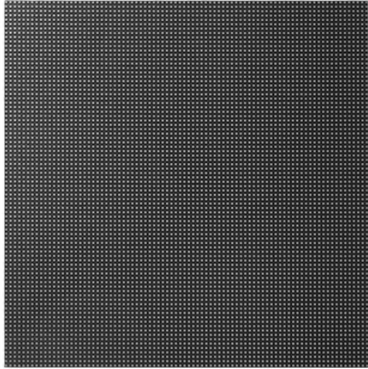

Module

Cabinet

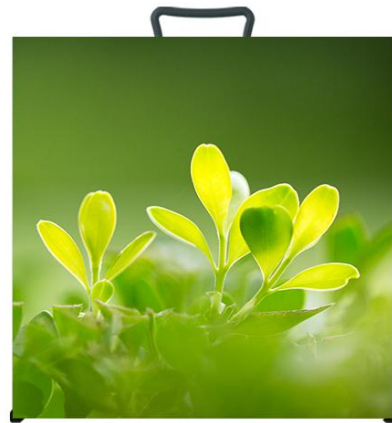

Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events sucas conferences, stage, product launches, and real estate.

Technical Parameters :

| | Item | Specification Parameter |
|---|-----------------------------------|---|
| Module Parameter | Pixel Pitch、Resolution rate、 size | 1.953mm、128*128、250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD1515 |
| | Working voltage、 Module Power | DC4.6V、 28W |
| | Driving IC、 Driving way | ICND2153S、 1/32 |
| | HUB | / |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 256*256Dots、 500*500*81m、 2*2 |
| Density | | 262144 Dots/m ² |
| White balance 、 Color temperature | | 600-800CD/m ² 、 3000K-10000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 500W/m ² 、 170W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 2880-3840Hz、 ≥14bit |
| Control system、 System supports | | CHIPSHOW, Windows XP, WIN 7 |
| Working temperature、 Protection grade | | -20~50℃、 Front/Back: IP40 |


Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co., Ltd.

Packaging parameters :


| | |
|----------------------|---|
| Gross Weight (kg) | 75kg (Estimated data, 8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data, 8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

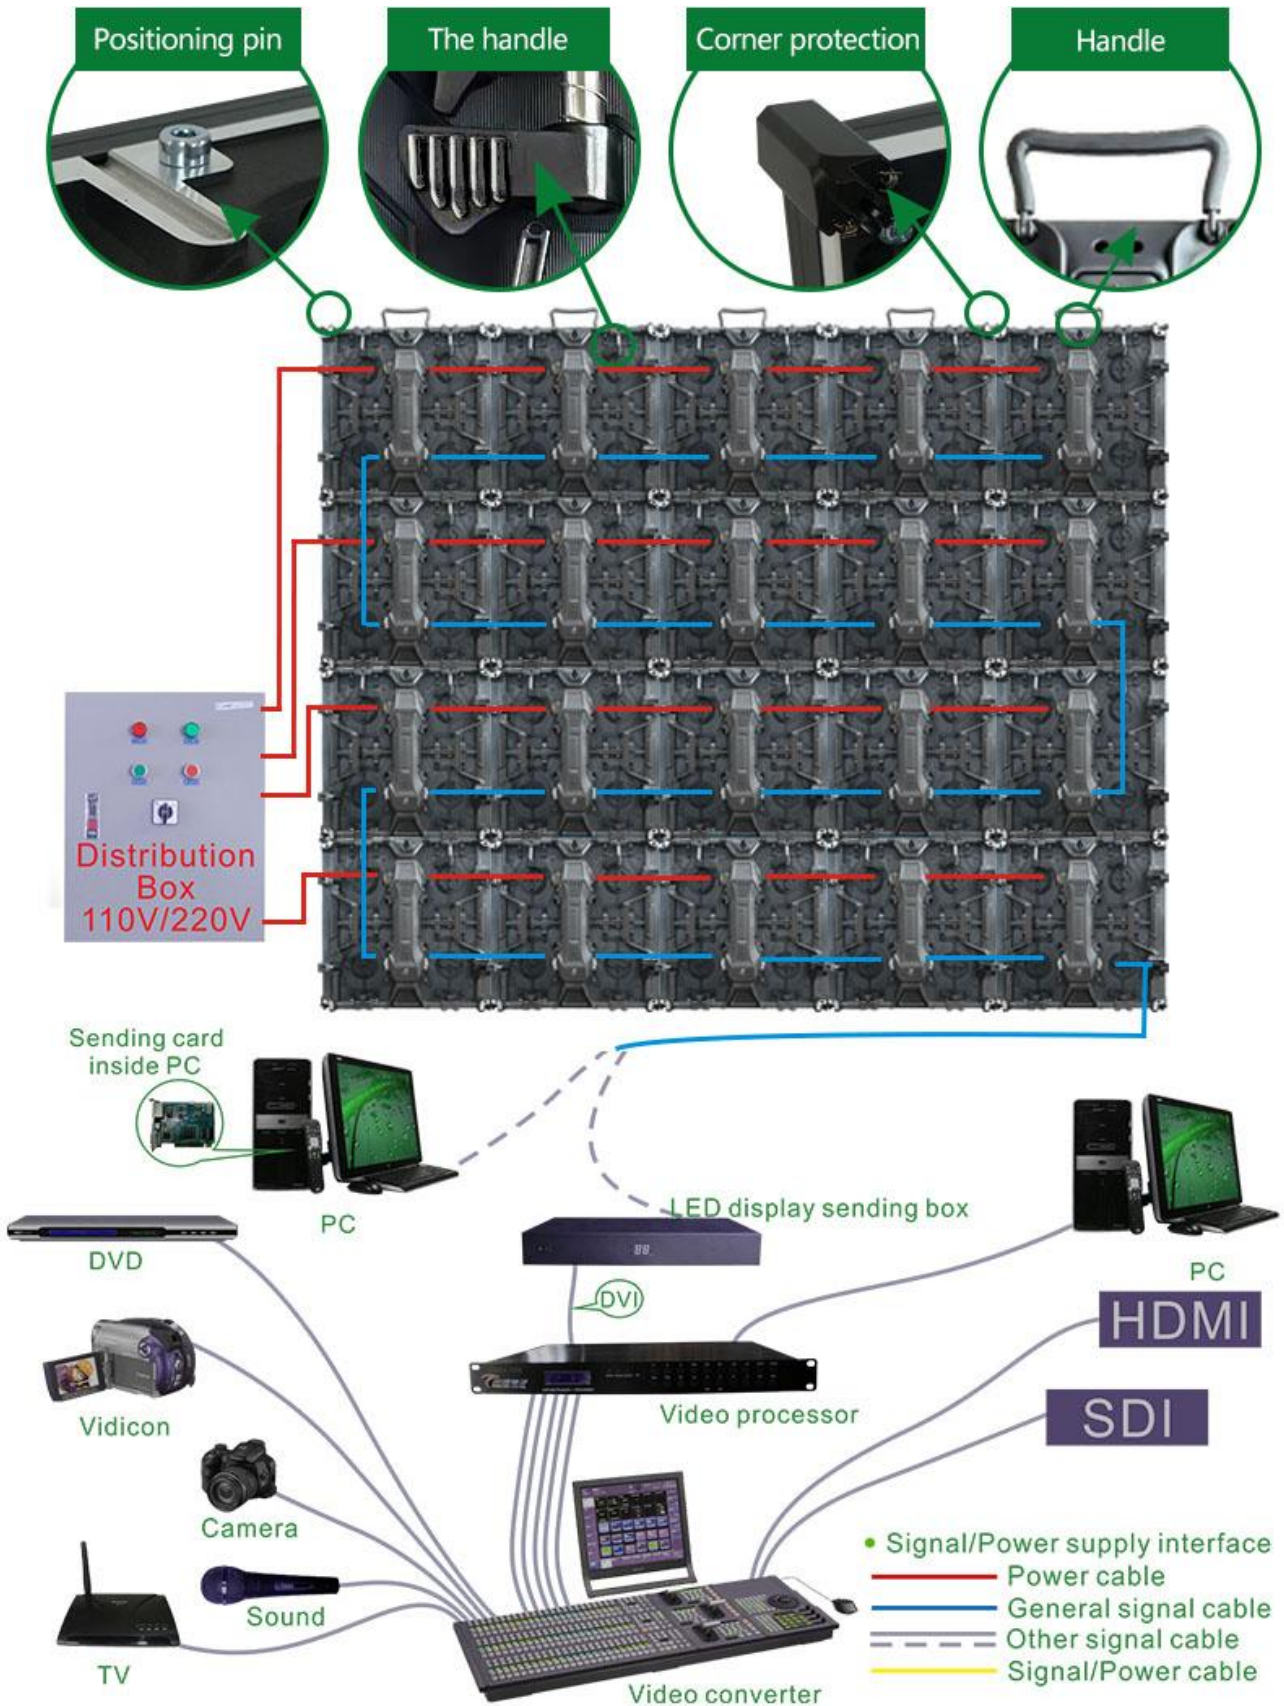

P2.604 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

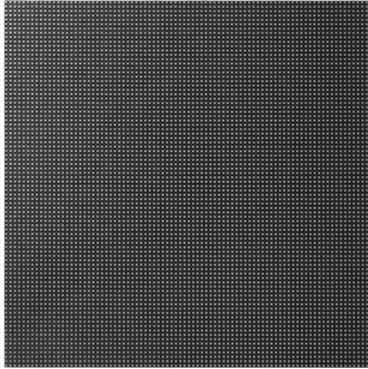

Module

Cabinet



Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events sucas conferences, stage, product launches, and real estate.

Technical Parameters:


| | Item | Specification Parameter |
|--|------------------------------------|---|
| Module Parameter | Pixel Pitch、 Resolution rate、 size | 2.604mm、 96*96、 250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD1515 |
| | Working voltage、 Module Power | DC4.6V、 28W |
| | Driving IC、 Driving way | ICND2153S、 1/32 |
| | HUB | / |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 192*192Dots、 500*500*81mm、 2*2 |
| Density | | 147456 Dots/m ² |
| White balance 、 Color temperature | | 800CD/m ² 、 3000K-10000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 500W/m ² 、 170W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 2880-3840Hz 、 ≥14bit |
| Control system、 System supports | | CHIPSHOW, Windows XP, WIN 7 |
| Working temperature、 Protection grade | | -20~50°C、 Front/Back: IP40 |
| Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd. | | |

Packaging parameters:


| | |
|----------------------|---|
| Gross Weight (kg) | 75kg (Estimated data, 8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data, 8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

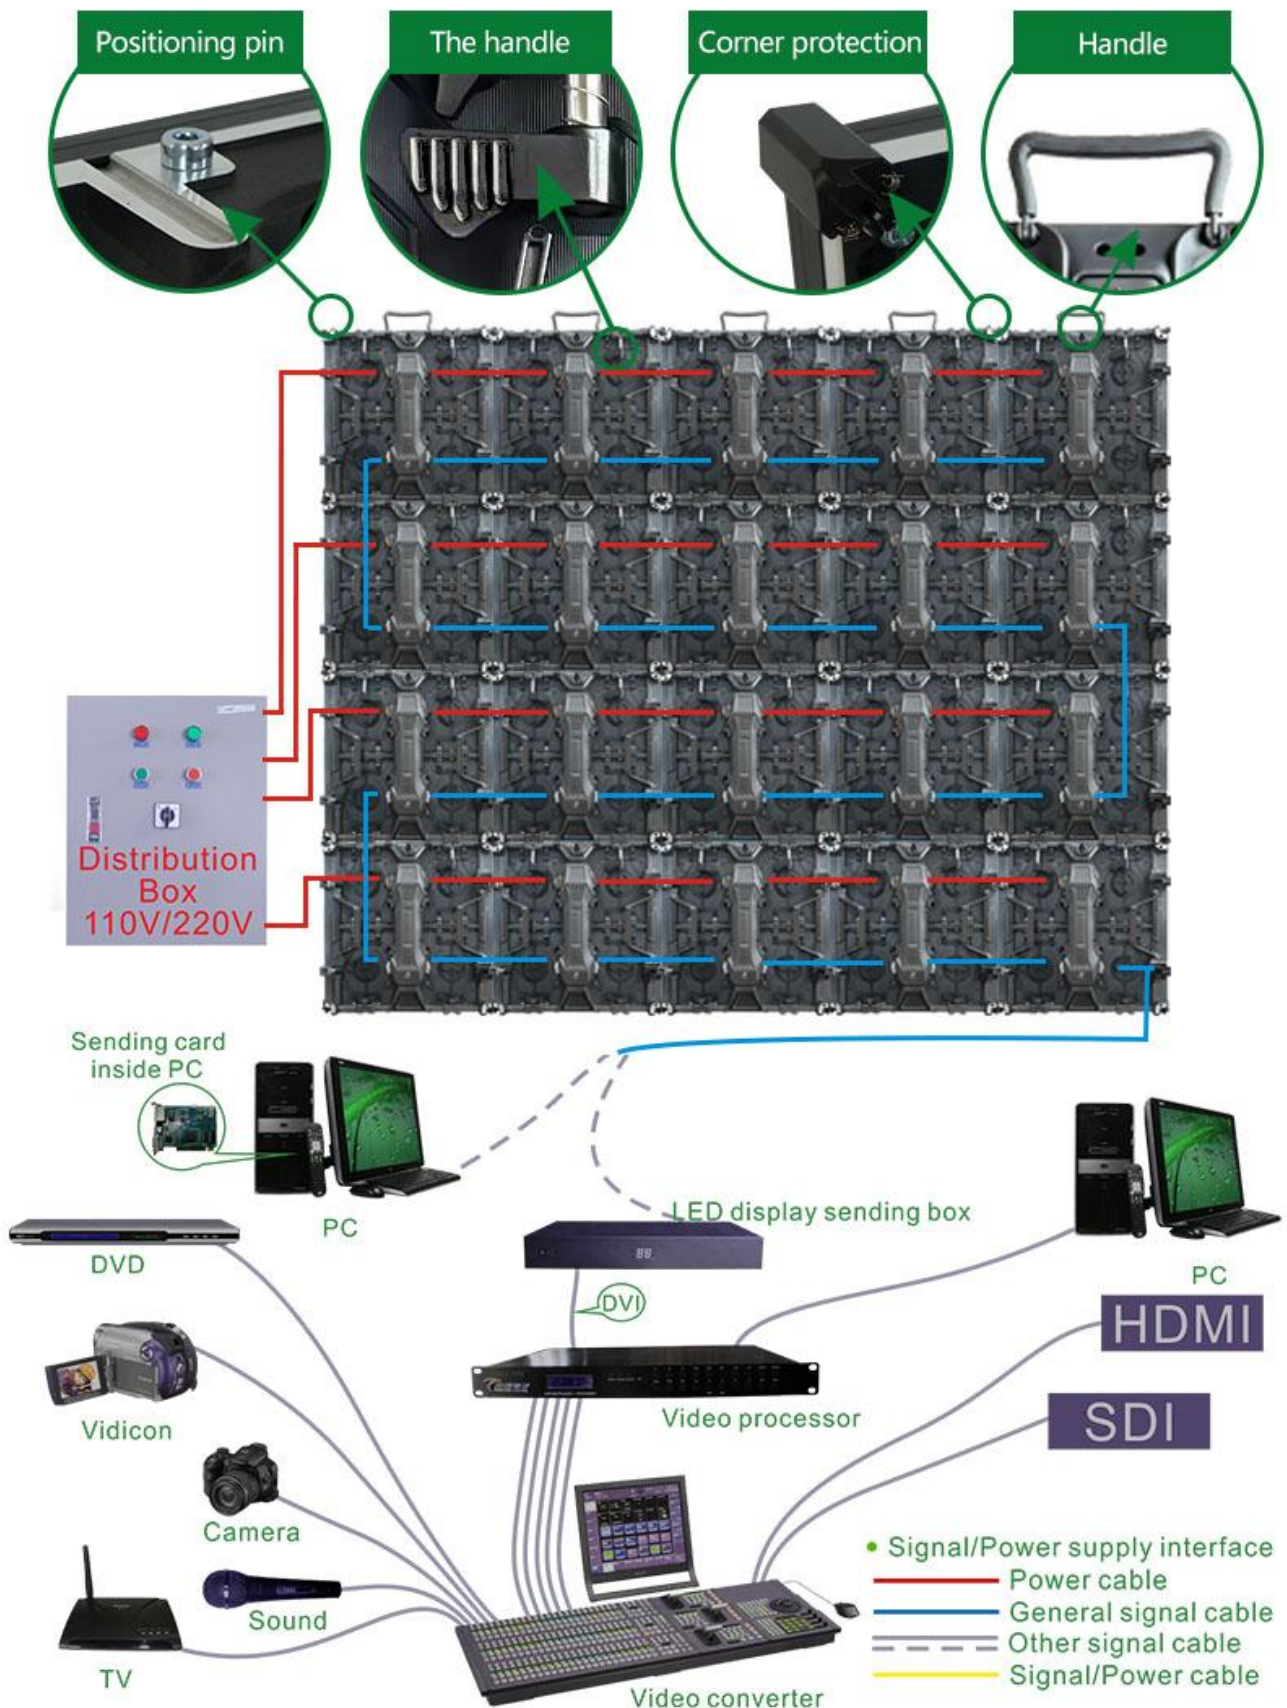

P2.604 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

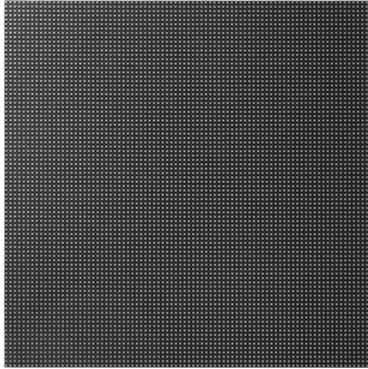

Module

Cabinet



Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events such as conferences, stage, product launches, and real estate.

Technical Parameters:


| | Item | Specification Parameter |
|--|----------------------------------|---|
| Module Parameter | Pixel Pitch、Resolution rate、size | 2.604mm、96*96、250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD1415 |
| | Working voltage、 Module Power | DC4.5V、 32W |
| | Driving IC、 Driving way | ICND2153S、 1/24 |
| | HUB | / |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 192*192Dots、 500*500*81mm、 2*2 |
| Density | | 147456 Dots/m ² |
| White balance 、 Color temperature | | 4000-4500CD/m ² 、 3000K-10000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 520W/m ² 、 180W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 7680Hz 、 ≥14bit |
| Control system、 System supports | | CHIPSHOW、 Windows XP、 WIN 7 |
| Working temperature、 Protection grade | | -20~50°C、 Front/Back: IP54 |
| Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd. | | |

Packaging parameters :


| | |
|----------------------|---|
| Gross Weight (kg) | 77kg (Estimated data, 8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data, 8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

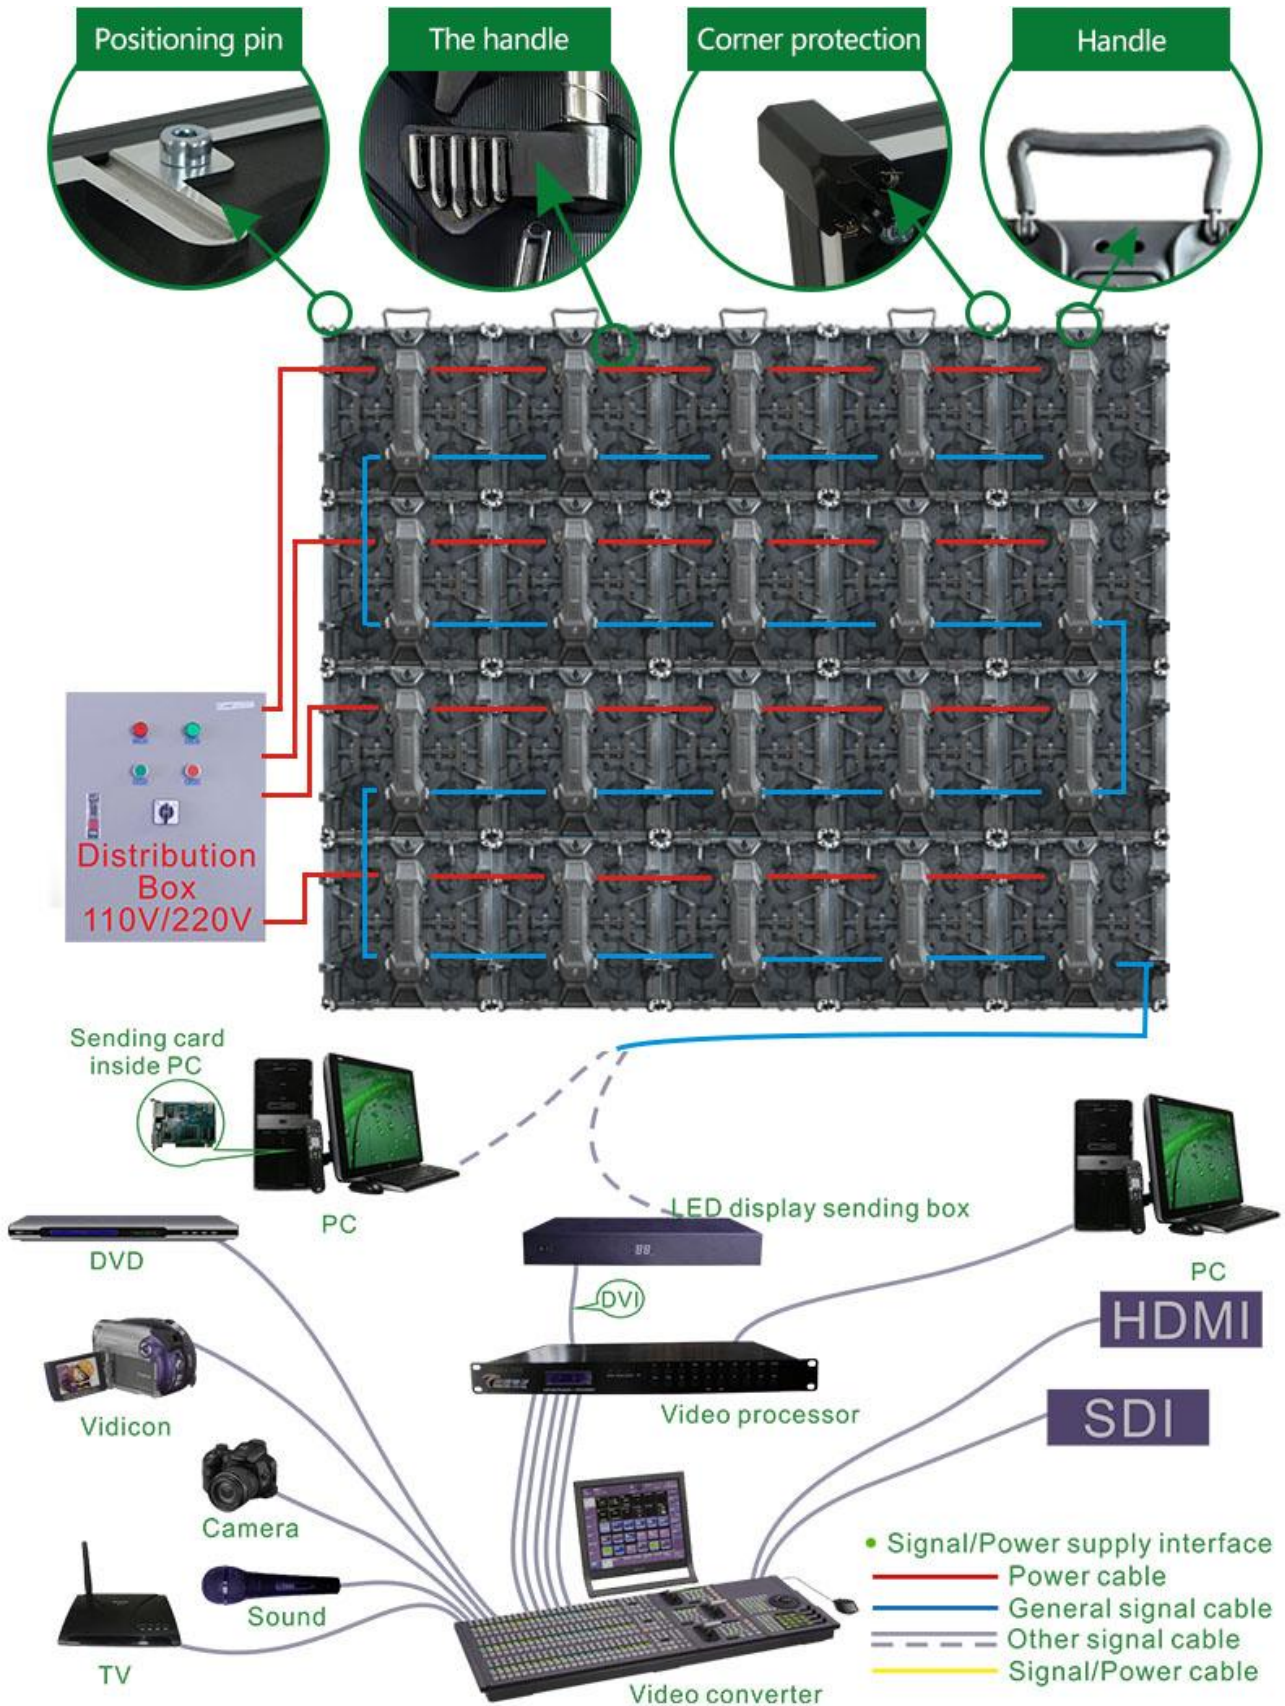

P2.97 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

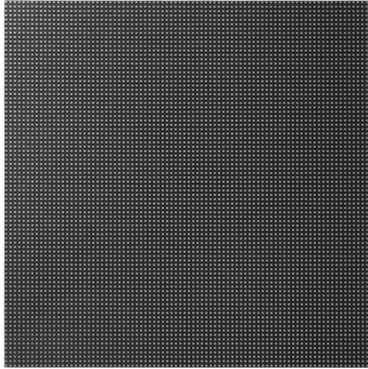

Module

Cabinet



Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events such as conferences, stage, product launches, and real estate.

Technical Parameters:


| | Item | Specification Parameter |
|---|----------------------------------|---|
| Module Parameter | Pixel Pitch、Resolution rate、size | 2.971mm、84*84、250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD2020 |
| | Working voltage、 Module Power | DC4.6V、 28W |
| | Driving IC、 Driving way | 2153s、 1/28 |
| | HUB | HUB (AXS-500X500)-V1.0 |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 168*168Dots、 500*500*81mm、 2*2 |
| Density | | 112896 Dots/m ² |
| White balance 、 Color temperature | | 800CD/m ² 、 3000K-10000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 500W/m ² 、 170W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 2880-3840Hz 、 ≥14bit |
| Control system、 System supports | | CHIPSHOW, Windows XP, WIN 7 |
| Working temperature、 Protection grade | | -20~50℃、 Front/Back: IP40 |
| <i>Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.</i> | | |

Packaging parameters:


| | |
|-----------------------|---|
| Gross Weight (kg) | 75kg (Estimated data, 8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data, 8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

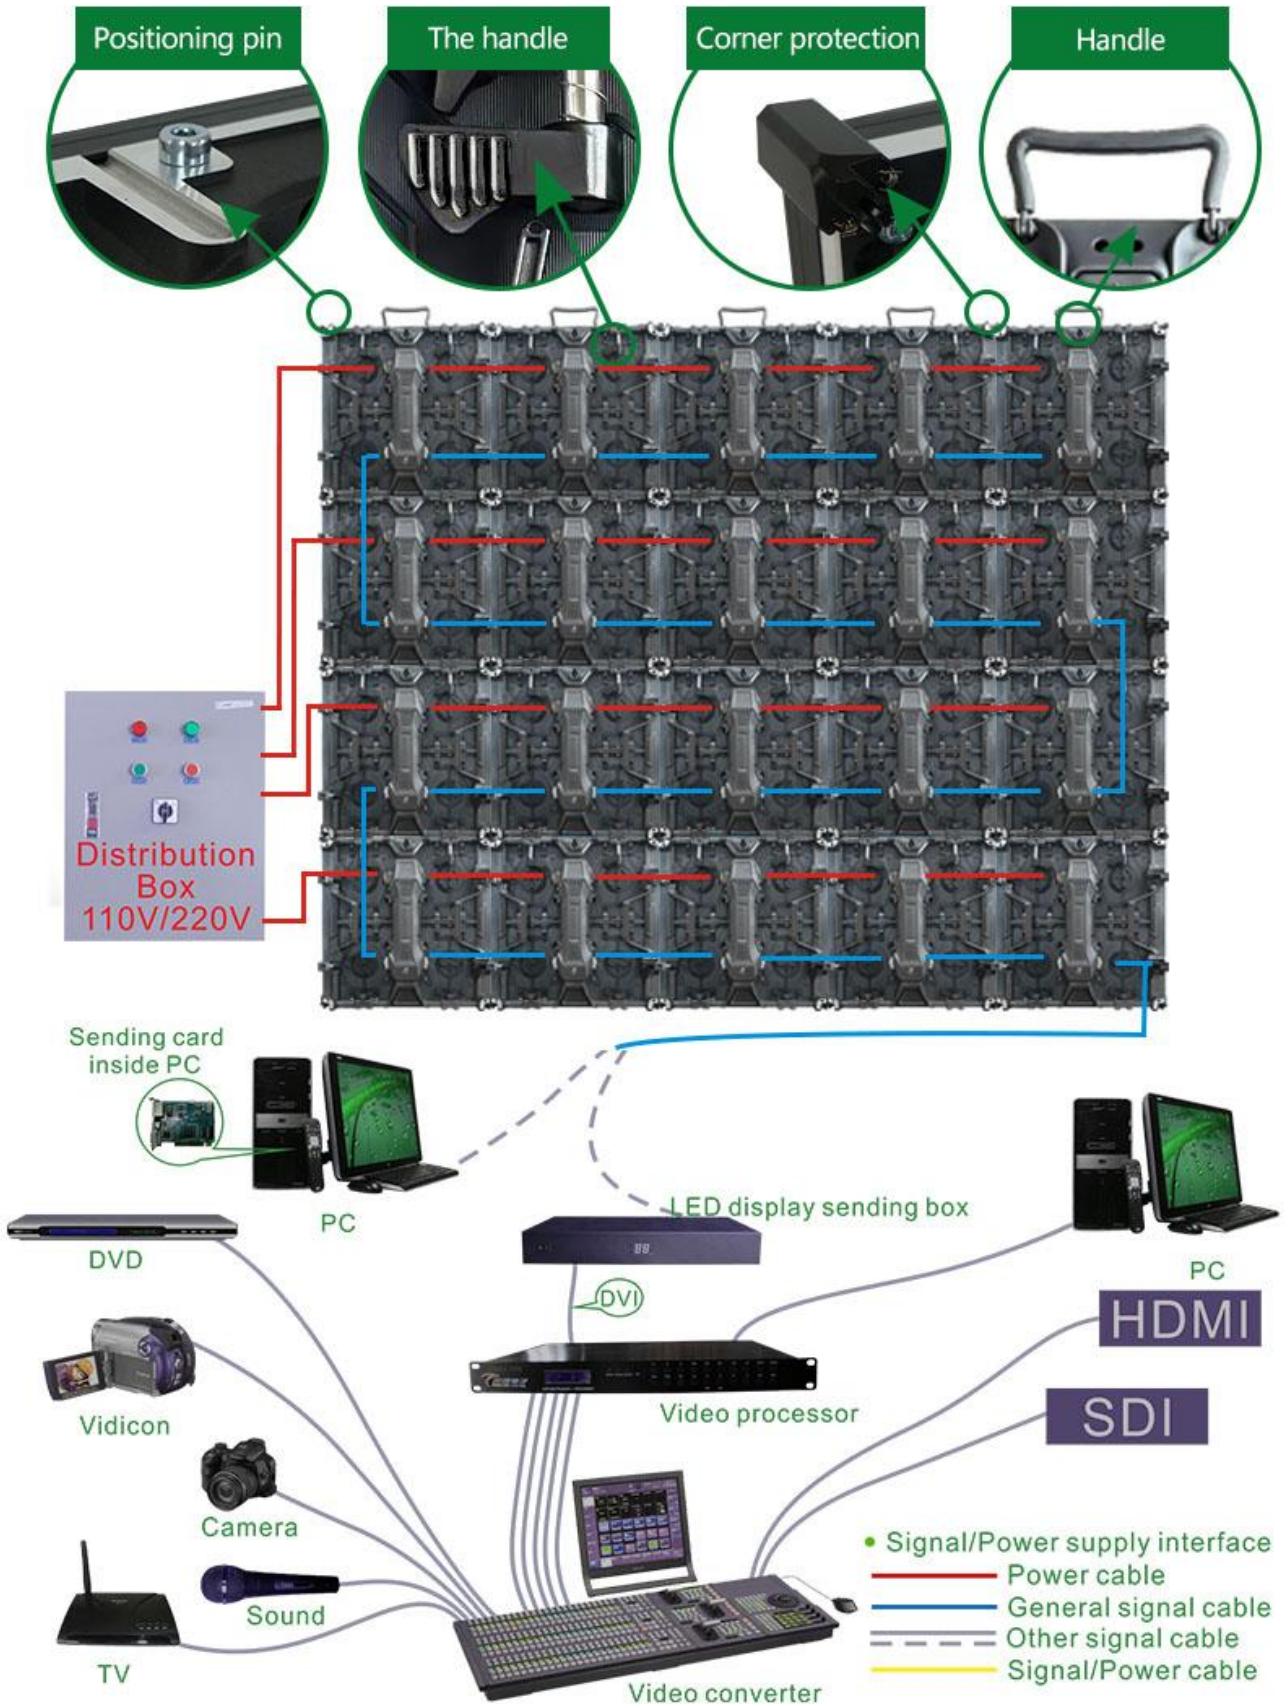

P2.97 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

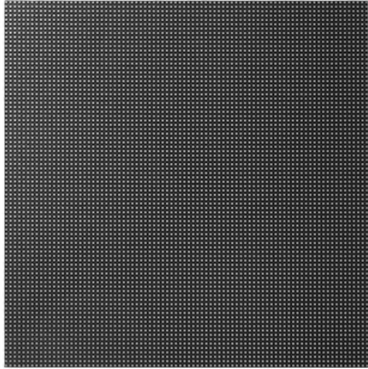

Module

Cabinet



Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events sucas conferences , stage , product launches , and real estate.

Technical Parameters:


| | Item | Specification Parameter |
|--|----------------------------------|---|
| Module Parameter | Pixel Pitch、Resolution rate、size | 2.971mm、84*84、250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD1415 |
| | Working voltage、 Module Power | DC4.6V、 32W |
| | Driving IC、 Driving way | ICND2153S、 1/21 |
| | HUB | / |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 168*168Dots、 500*500*81mm、 2*2 |
| Density | | 112896 Dots/m ² |
| White balance 、 Color temperature | | 4000-4300CD/m ² 、 3000K-10000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 520W/m ² 、 180W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 7680Hz 、 ≥14bit |
| Control system、 System supports | | CHIPSHOW、 Windows XP、 WIN 7 |
| Working temperature、 Protection grade | | -20~50°C、 Front/Back: IP54 |
| <i>Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co., Ltd.</i> | | |

Packaging parameters:


| | |
|-----------------------|--|
| Gross Weight (kg) | 77kg (Estimated data,8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data,8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

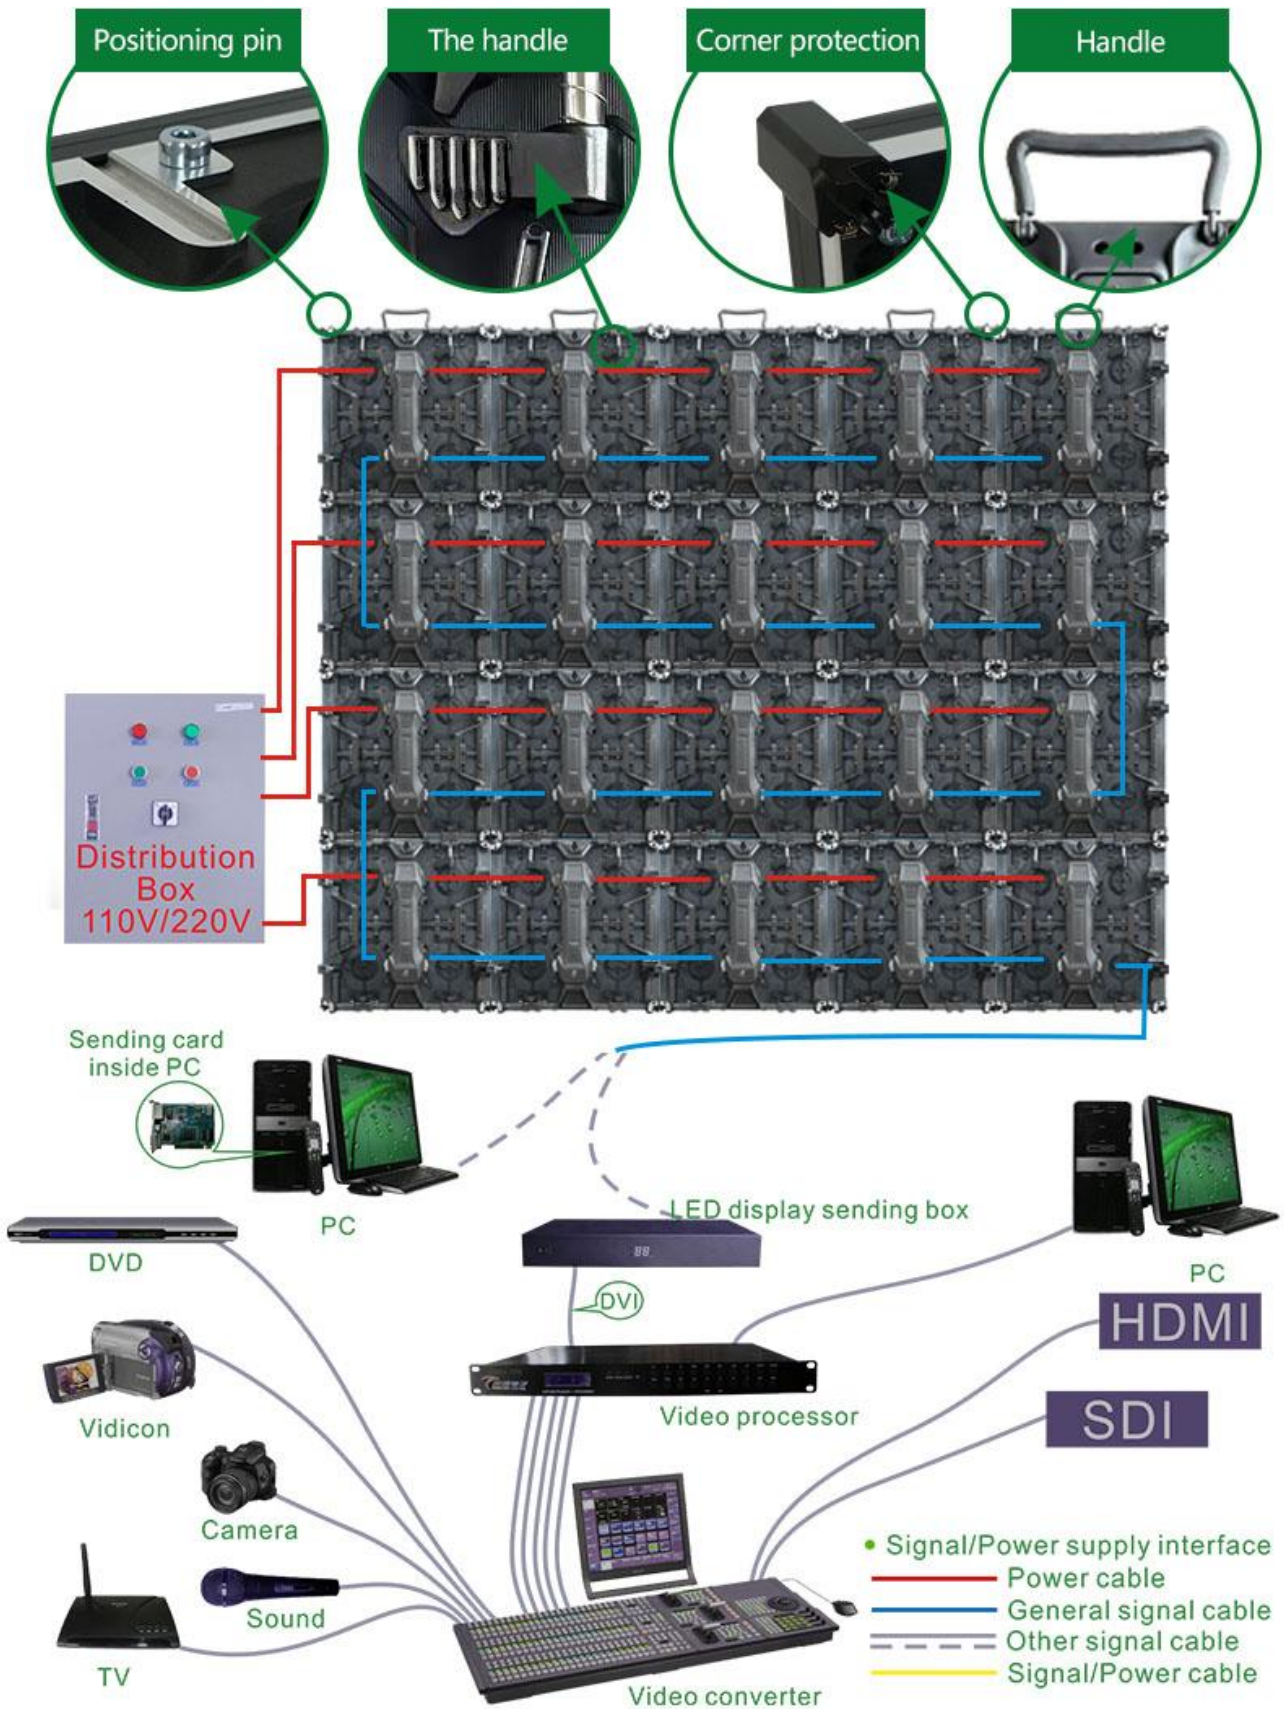

P3.91 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

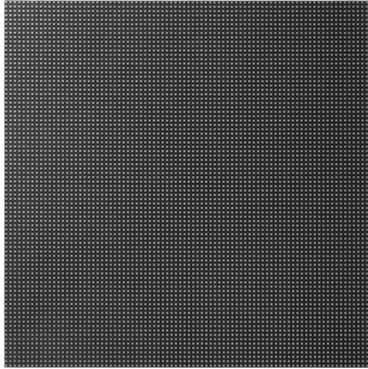

Module

Cabinet



Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events sucas conferences , stage , product launches , and real estate.

Technical Parameters :


| | Item | Specification Parameter |
|---|------------------------------------|---|
| Module Parameter | Pixel Pitch、 Resolution rate、 size | 3.91mm、 64*64、 250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD2020 |
| | Working voltage、 Module Power | DC4.6V、 28W |
| | Driving IC、 Driving way | ICND2153S、 1/16 |
| | HUB | / |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 128*128Dots、 500*500*81mm、 2*2 |
| Density | | 65536 Dots/m ² |
| White balance 、 Color temperature | | 800CD/m ² 、 6000K-8000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 500W/m ² 、 170W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 2880-3840Hz 、 ≥14bit |
| Control system、 System supports | | CHIPSHOW、 Windows XP、 WIN 7 |
| Working temperature、 Protection grade | | -20~50°C、 Front/Back: IP40 |
| <i>Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.</i> | | |

Packaging parameters :


| | |
|----------------------|---|
| Gross Weight (kg) | 75kg (Estimated data, 8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data, 8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

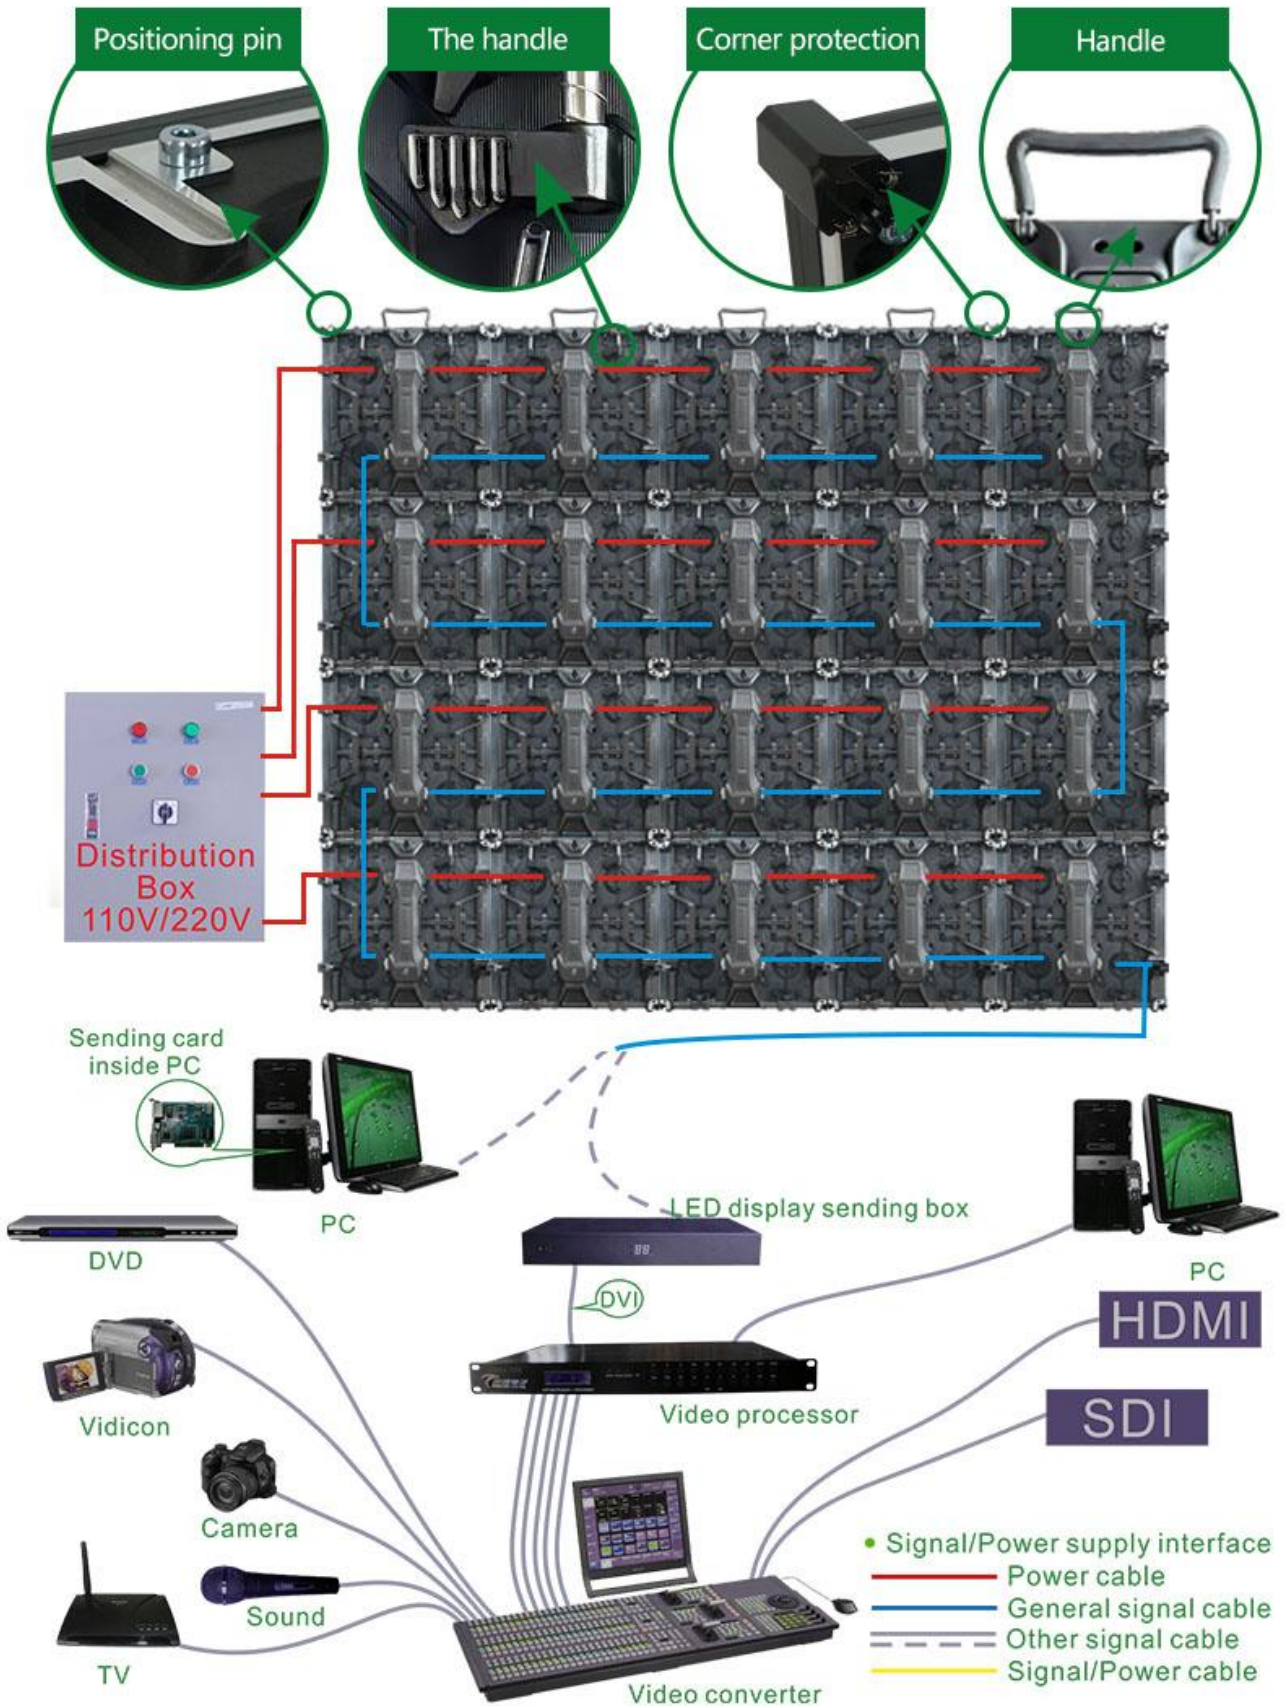

P3.91 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification

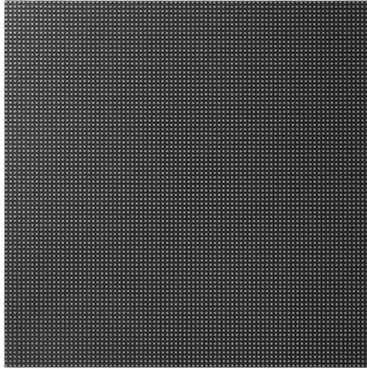

Module

Cabinet



Product Features:

- 1、 High precision cast aluminum cabinet, ultra-thin and light weight, 500 * 500 ≤ 7KG/cabinet, with a thickness of only 81mm;
- 2、 500X500 or 500X1000mm cabinets can be assembled up and down;
- 3、 500and1000mm cabinets, both with quick release control box for fast disassembly and assembly;
- 4、 Optional curved lock, capable of splicing large screens with - 10 to 15 ° camber, 90°corner, etc;
- 5、 Module one-touch rotary unlock design for quick disassembly and maintenance within 5 seconds;
- 6、 Work in silence: no fan, noise ≤ 40DB; Not affecting the on-site audio-visual effect;
- 7、 Background large screen optimization plan; High refresh, SLR, camera 1/3000S shutter capture, no flicker, no ghost scanning line;
- 8、 Indoor and outdoor universal pixel pitches with P1.9/2.6/2.9/3.9/4.8 ets;Specialized in providing overall LED display solutions for events sucas conferences , stage , product launches , and real estate.

Technical Parameters :


| | Item | Specification Parameter |
|---|------------------------------------|---|
| Module Parameter | Pixel Pitch、 Resolution rate、 size | 3.91mm、 64*64、 250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD1921 |
| | Working voltage、 Module Power | DC4.6V、 45W |
| | Driving IC、 Driving way | ICND2153S、 1/16 |
| | HUB | / |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 128*128Dots、 500*500*81mm、 2*2 |
| Density | | 65536 Dots/m ² |
| White balance 、 Color temperature | | 4000-4500CD/m ² 、 6000K-8000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120° /120° 、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | 520W/m ² 、 180W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60Hz、 7680Hz 、 ≥14bit |
| Control system、 System supports | | CHIPSHOW、 Windows XP、 WIN 7 |
| Working temperature、 Protection grade | | -20~50°C、 Front/Back: IP54 |
| <i>Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.</i> | | |

Packaging parameters :


| | |
|----------------------|---|
| Gross Weight (kg) | 77kg (Estimated data, 8pcs /Case) |
| Outer Package Size | 920*576*724mm (Estimated data, 8pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

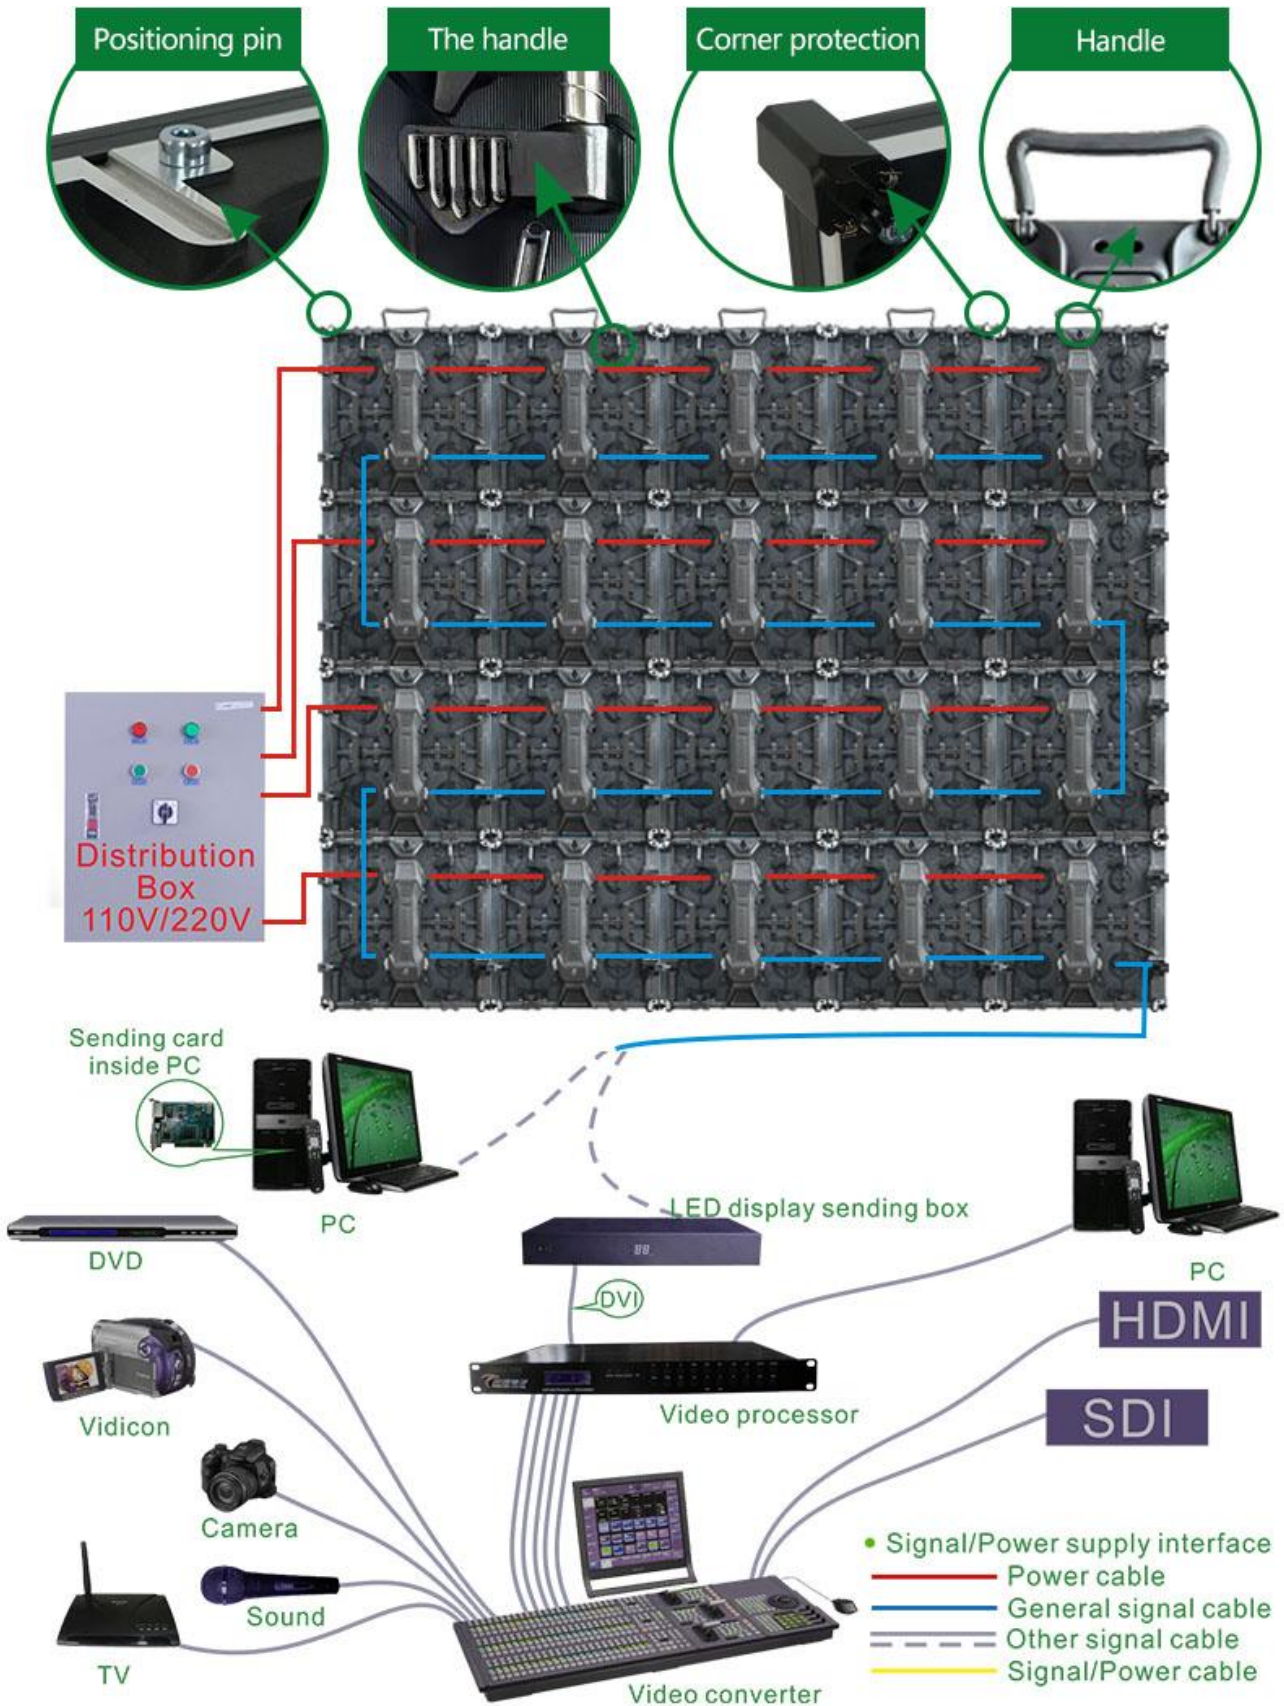

P1.56 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification



Module

Cabinet



Semi-Outdoor Full-Color HD LED Display

1. Superior Flatness: Made with ADC12-grade high-strength die-cast aluminum cabinets, ensuring excellent flatness and resistance to deformation even after frequent assembly.
2. Practical Design: Simplistic&practical design featuring wide&sturdy handles and convenient fast locks for easy operation.
3. Magnetic Module: Allow for both front and rear maintenance; magnetic alignment ensures precise and efficient cabinet installation, making it cost-effective for rental setups.
4. High Protection: Equipped with protective corners and anti-collision protrusions to safeguard LED lamps, preventing damage during transportation and installation.
5. Versatile Applications: Supports multiple installation methods, including ground-stacking and hanging. Specialized in providing overall LED display solutions for events such as conferences, stage, product launches, and real estate.

Technical Parameters:


| | Item | Specification Parameter |
|---|------------------------------------|---|
| Module Parameter | Pixel Pitch、 Resolution rate、 size | 1.5625mm、 160*160、 250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 GOB/SMD1010 |
| | Working voltage、 Module Power | DC4.6V、 ≤45W |
| | Driving IC、 Driving way | ICND1069、 1/27 |
| | HUB | - |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 320*320Dots、 500*500*82mm、 2*2 |
| Density | | 409600 Dots/m ² |
| White balance 、 Color temperature | | 3700-4200 CD/m ² 、 6000K-8000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120°/120°、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | ≤680W/m ² 、 ≤230W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60hz、 3840Hz、 ≥14bit |
| Control system、 System supports | | CHIPSHOW, Windows XP, WIN 7 |
| Working temperature、 Protection grade | | -20~50℃、 IP54 |
| <small>Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.</small> | | |

Packaging parameters:



| | |
|-----------------------|--|
| Gross Weight (kg) | 65kg (Estimated data,6pcs /Case) |
| Outer Package Size | 800*570*660mm (Estimated data,6pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

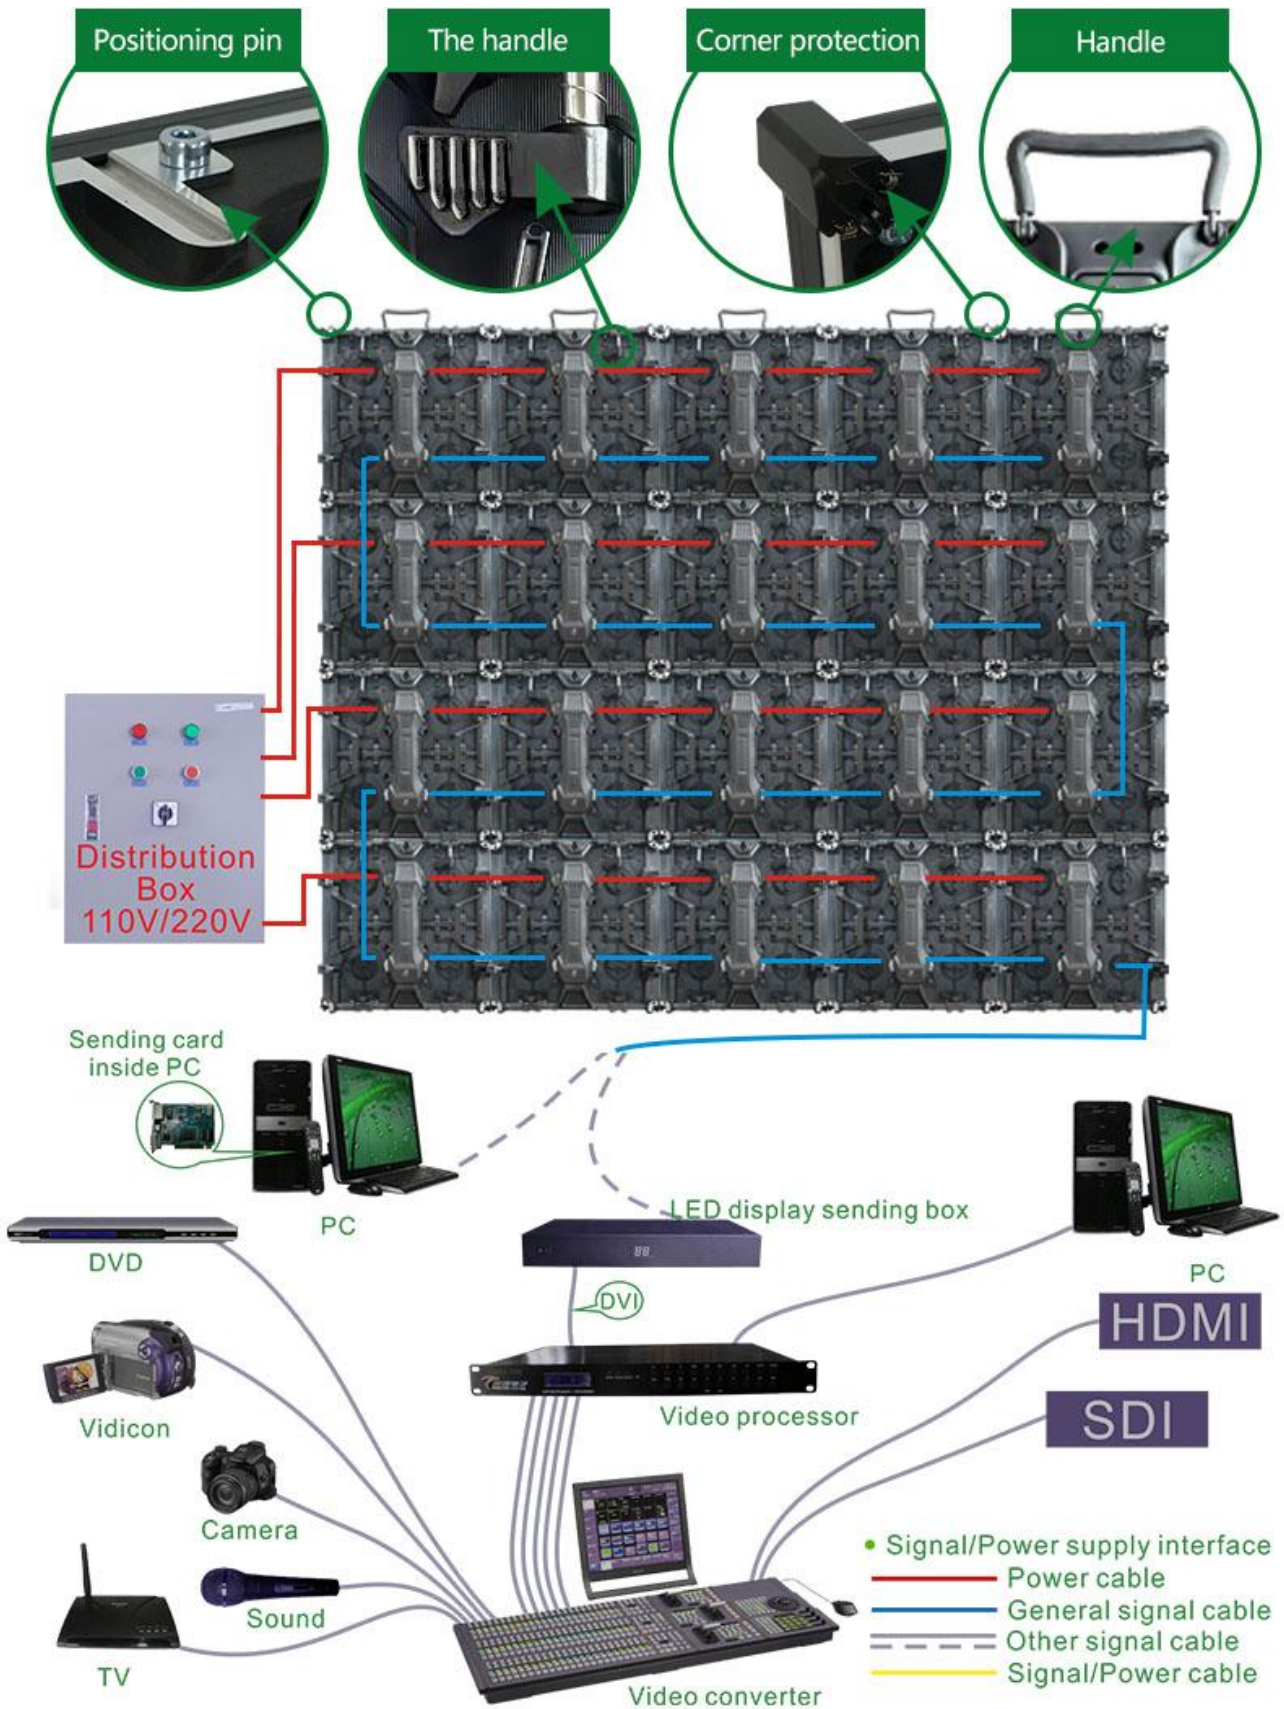

P1.95 500*500 Die-Cast Aluminum Cabinet Full Color LED Display Specification



Module

Cabinet



Semi-Outdoor Full-Color HD LED Display

1. Superior Flatness: Made with ADC12-grade high-strength die-cast aluminum cabinets, ensuring excellent flatness and resistance to deformation even after frequent assembly.
2. Practical Design: Simplistic&practical design featuring wide&sturdy handles and convenient fast locks for easy operation.
3. Magnetic Module: Allow for both front and rear maintenance; magnetic alignment ensures precise and efficient cabinet installation, making it cost-effective for rental setups.
4. High Protection: Equipped with protective corners and anti-collision protrusions to safeguard LED lamps, preventing damage during transportation and installation.
5. Versatile Applications: Supports multiple installation methods, including ground-stacking and hanging. Specialized in providing overall LED display solutions for events such as conferences, stage, product launches, and real estate.

Technical Parameters :

| | Item | Specification Parameter |
|---|------------------------------------|---|
| Module Parameter | Pixel Pitch、 Resolution rate、 size | 1.95mm、 128*128、 250*250*16mm |
| | Pixel color、 Pixel LED | 1R1G1B、 SMD1415 |
| | Working voltage、 Module Power | DC4.6V、 ≤40W |
| | Driving IC、 Driving way | ICN2153S、 1/32 |
| | HUB | - |
| | Cabinet Parameter | Material、 Cabinet Weight(kg/Cabinet) |
| Resolution rate、 size、 Module quantity | | 256*256Dots、 500*500*82m、 2*2 |
| Density | | 262144 Dots/m ² |
| White balance 、 Color temperature | | 3000-3500 CD/m ² 、 6000K-8000K |
| view angle、 Non-Flatness、 Module interval | | H/V: 120°/120°、 <0.2mm、 <0.2mm |
| Maximal power/m ² 、 Average power/m ² | | ≤680W/m ² 、 ≤230W/m ² |
| Frame frequency、 Refresh frequency、 Gray grade | | 60hz、 3840Hz、 ≥14bit |
| Control system、 System supports | | CHIPSHOW、 Windows XP、 WIN 7 |
| Working temperature、 Protection grade | | -20~50℃、 IP54 |
| <i>Different configuration different parameters, only for reference , Details, please consult Shenzhen Chip Optech Co. , Ltd.</i> | | |

Packaging parameters :

| | |
|-----------------------|--|
| Gross Weight (kg) | 65kg (Estimated data,6pcs /Case) |
| Outer Package Size | 800*570*660mm (Estimated data,6pcs /Case) |
| Packing Material | Flight case |



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

