


C-Slim P4 Curved Reception LED Display



Module

Cabinet

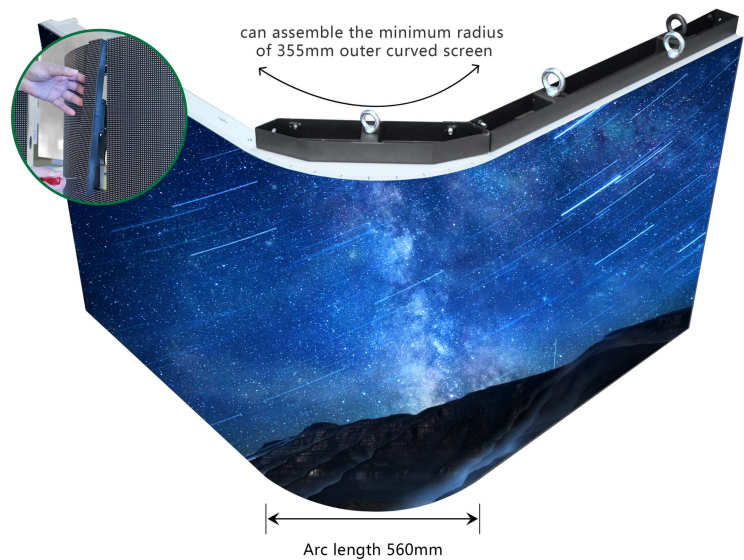

Features

1. Bright energy saving: 4.6V voltage power supply, brightness $\geq 5500\text{CD}/\text{m}^2$;
2. Good display effect: the display screen has no color bias, no ghost and other defects when the low gray flat display, and the display screen is more delicate.
3. Dual maintenance: the module and box are designed with front and rear maintenance scheme, which can meet various installation requirements;
4. Minimum radius: This module can assemble the minimum radius of 355mm outer arc screen, and can also do the minimum diameter of 710mm cylindrical screen.
5. Ultra-light: the weight of the finished 560X960 curved aluminum box is less than 15kg/pcs (25kg/m²), saving time and labor in transportation;
6. High protection level: The module adopts a fully enclosed design, supports full front and rear maintenance, IP65 protection level

Technical Parameters :


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	4mm、 10*80Dots、 40*320
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、 Module Power	DC4.6V、 ≤10W
	Driving IC、 Driving way	ICND2153s、 1/10
	HUB	HUB75
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		140*240Dots、 560*960*95mm、 14X3
Density		62500 Dots/m ²
White balance 、 Color temperature		5500CD/m ² 、 6000-8000K
view angel、 Non-Flatness、 Module interval		H/V: 120°/120°、 <0.2mm、 <0.2mm
Maximal power/m ² 、 Average power/m ²		≤650W/m ² 、 ≤215W/m ²
Frame frequency、 Refresh frequency、 Gray grade		60Hz、 3840Hz、 13bit
Control system、 System supports		CHIPSHOW, Windows XP, WIN 7
Working temperature、 Protection grade		- 20~50℃、 Front/Back: IP65/IP54
*Reference information, different configurations, different parameters		

Package Parameters :


Gross Weight (kg)	75kg (Estimated data,4pcs /Case)
Outer Package Size	650*800*1150mm (Estimated data,4pcs /Case)
Packing Material	Carton+Pearl cotton +wooden pallet



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

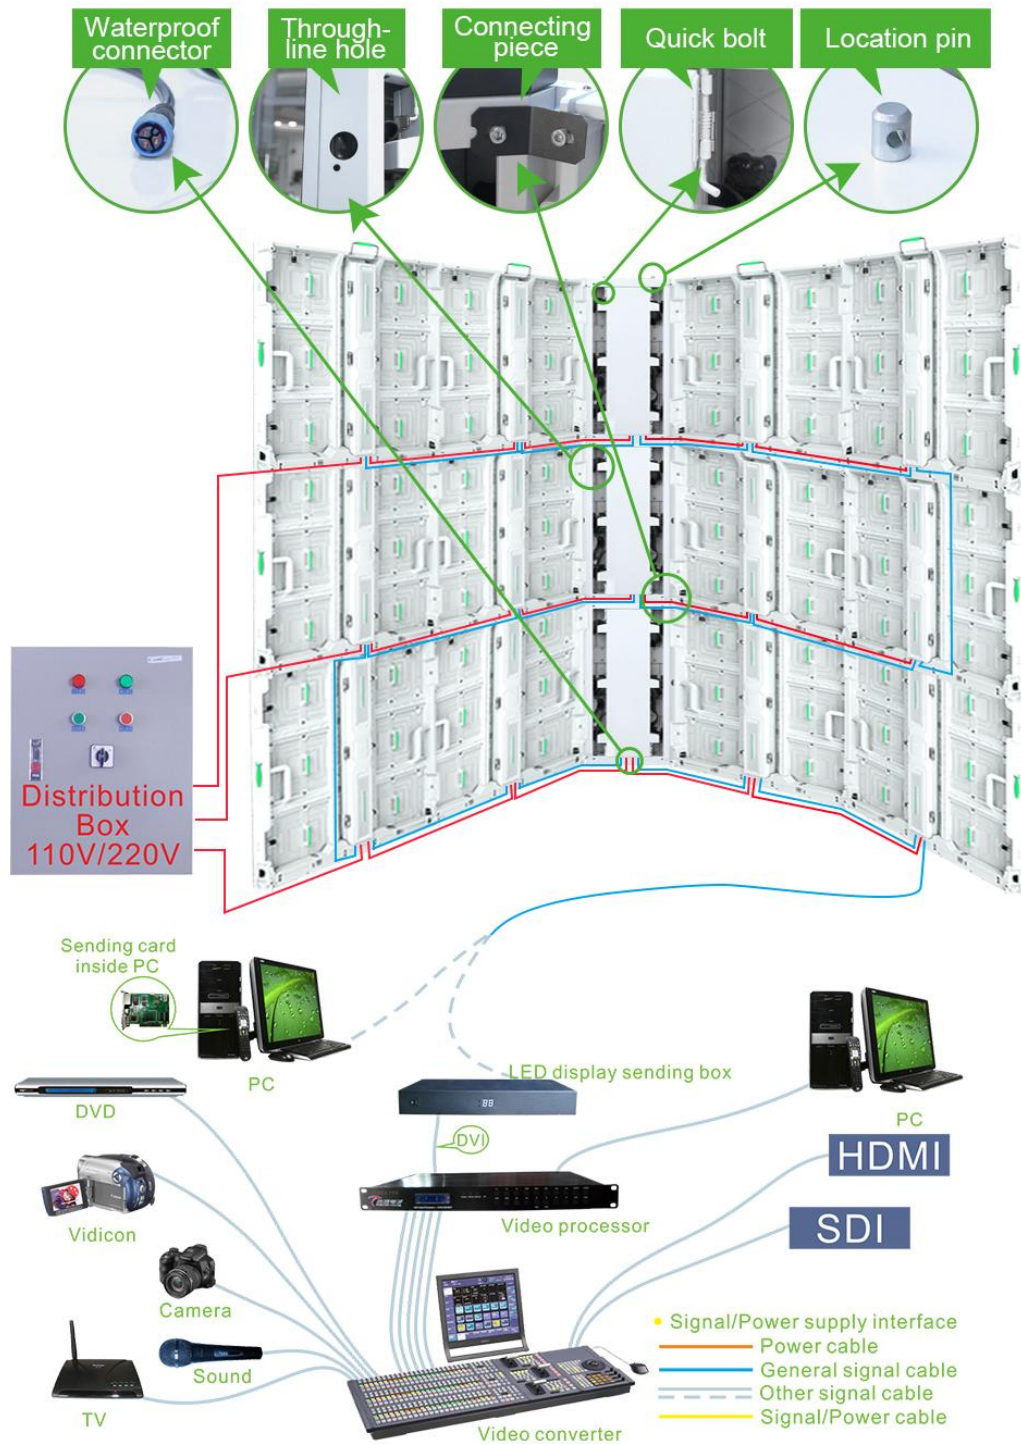


C-Slim P5 Curved Reception LED Display

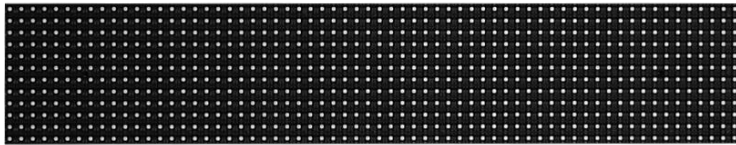

Module

Cabinet

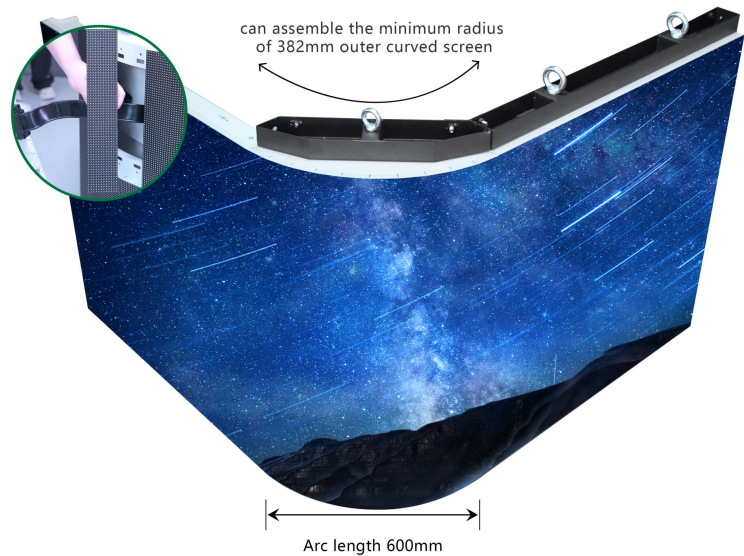

Features

1. Bright energy saving: 4.6V voltage power supply, brightness $\geq 5000\text{CD}/\text{m}^2$;
2. Good display effect: the display screen has no color bias, no ghost and other defects when the low gray flat display, and the display screen is more delicate.
3. Dual maintenance: the module and box are designed with front and rear maintenance scheme, which can meet various installation requirements;
4. Minimum radius: This module can assemble the minimum radius of 382mm outer arc screen, and can also do the minimum diameter of 764mm cylindrical screen.
5. Ultra-light: the weight of the finished 600X960 curved aluminum box is less than 15kg/pcs (25kg/m²), saving time and labor in transportation;
6. High protection level: The module adopts a fully enclosed design, supports full front and rear maintenance, IP65 protection level

Technical Parameters :


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	5mm、 12*64Dots、 60*320
	Pixel color、 Pixel LED	1R1G1B、 SMD1921
	Working voltage、 Module Power	DC4.6V、 ≤10W
	Driving IC、 Driving way	ICND2153s、 1/8
	HUB	HUB75
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		120*192Dots、 600*960*95mm、 10X3
Density		40000 Dots/m ²
White balance 、 Color temperature		5000CD/m ² 、 6000-8000K
view angel、 Non-Flatness、 Module interval		H/V: 120°/120°、 <0.2mm、 <0.2mm
Maximal power/m ² 、 Average power/m ²		≤560W/m ² 、 ≤170W/m ²
Frame frequency、 Refresh frequency、 Gray grade		60Hz、 3840Hz、 13bit
Control system、 System supports		CHIPSHOW, Windows XP, WIN 7
Working temperature、 Protection grade		- 20~50℃、 Front/Back: IP65/IP54
*Reference information, different configurations, different parameters		

Package Parameters :


Gross Weight (kg)	75kg (Estimated data,4pcs /Case)
Outer Package Size	650*800*1150mm (Estimated data,4pcs /Case)
Packing Material	Carton+Pearl cotton +wooden pallet



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

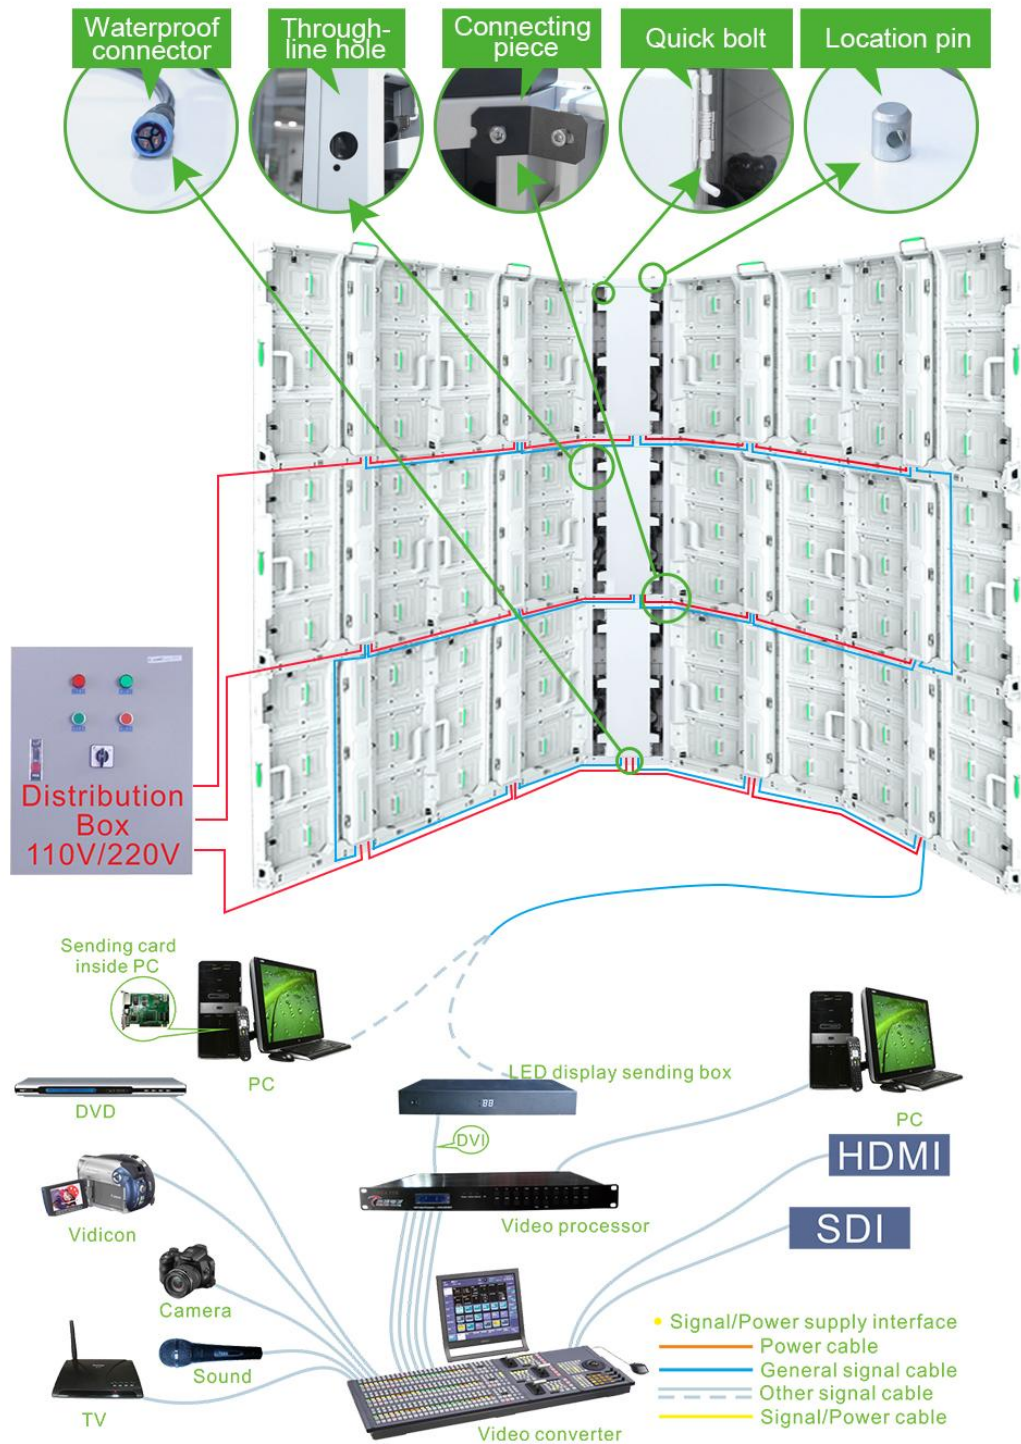


C-Slim P6.67 Curved Reception LED Display



Module

Cabinet

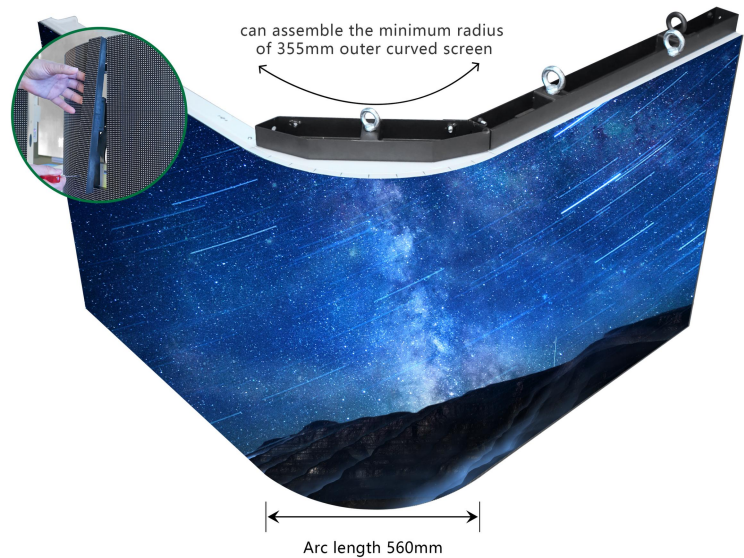

Features

1. Bright energy saving: 4.6V voltage power supply, brightness $\geq 5500\text{CD}/\text{m}^2$;
2. Good display effect: the display screen has no color bias, no ghost and other defects when the low gray flat display, and the display screen is more delicate.
3. Dual maintenance: the module and box are designed with front and rear maintenance scheme, which can meet various installation requirements;
4. Minimum radius: This module can assemble the minimum radius of 355mm outer arc screen, and can also do the minimum diameter of 710mm cylindrical screen.
5. Ultra-light: the weight of the finished 560X960 curved aluminum box is less than 15kg/pcs (25kg/m²), saving time and labor in transportation;
6. High protection level: The module adopts a fully enclosed design, supports full front and rear maintenance, IP65 protection level

Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	6.67mm、 6*48Dots、 40*320
	Pixel color、 Pixel LED	1R1G1B、 SMD2727
	Working voltage、 Module Power	DC4.6V、 ≤6W
	Driving IC、 Driving way	Standard configuration ICND1069AP、 1/6
	HUB	HUB75
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		84*144Dots、 560*960*95mm、 14X3
Density		22498 Dots/m ²
White balance 、 Color temperature		5500CD/m ² 、 6000-8000K
view angel、 Non-Flatness、 Module interval		H/V: 120°/120°、 <0.2mm、 <0.2mm
Maximal power/m ² 、 Average power/m ²		≤400W/m ² 、 ≤135W/m ²
Frame frequency、 Refresh frequency、 Gray grade		60Hz、 3840Hz、 13bit
Control system、 System supports		CHIPSHOW, Windows XP, WIN 7
Working temperature、 Protection grade		- 20~50℃、 Front/Back: IP65/IP54
*Reference information, different configurations, different parameters		

Package Parameters:

Gross Weight (kg)	75kg (Estimated data,4pcs /Case)
Outer Package Size	650*800*1150mm (Estimated data,4pcs /Case)
Packing Material	Carton+Pearl cotton +wooden pallet



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

