



P8 Specification of Full Color Stadium Screen

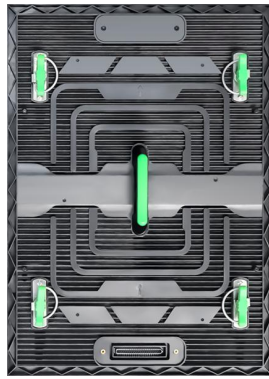

Module

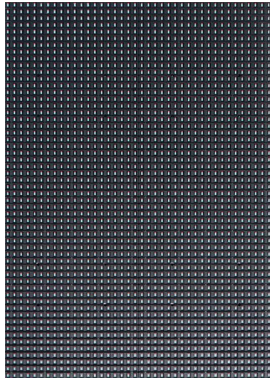

Cabinet



- ◆ The cabinet comes with a 90° rotating bracket and left and right fast locks for efficient assembly of the stadium LED display.
- ◆ The screen comes with soft mask and pillow protection, so athletes and the LED display are perfectly protected.
- ◆ Aluminum power box, thin and light, good heat dissipation, slowing down the aging of the power and module.
- ◆ Front and rear maintenance of the module, easy operation.
- ◆ Waterproof and dustproof, protection grade \geq IP65.
- ◆ Energy-saving, about 1/3 energy saving than traditional LED display, greatly reducing the operating cost.
- ◆ Professional software, and supports video source input such as DP, HDMD, VGA, SDL, DVD, etc.

Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	8mm、 40*56Dots、 320*450mm
	Pixel color、 Pixel LED	SMD 2727 (NATIONSTAR)
	Working voltage、 Module Power	4.2V/3.2V、 ≤73W
	Driving IC、 Driving way	ICND2153S、 1/4S
	HUB	HUB75
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum alloy cabinet、 32.5kg/PCS
	Resolution rate、 size、 Module quantity	160*112 Dots、 1280*900*100mm、 4*2
	Density	15625 Dots/m ²
	White balance 、 Color temperature	≤5500cd/m ² 、 6000k-8000k
	view angel、 Non-Flatness、 Module interval	H:120° ; V:120° 、 <0.2mm、 <0.5mm
	Maximal power/m ² 、 Average power/m ²	≤570w/m ² 、 ≤170w/m ²
	Frame frequency、Refresh frequency、Gray grade	60hz、 ≥3840hz、 ≥14bit
	Control system、 System supports	Nova, Colorlight, CHIPSHOW; Windows XP, WIN 13
	Working temperature、 Protection grade	-20 ~50°C、 Front/Back: IP65/IP54
*Reference information, different configurations, different parameters		

Package Parameters:



Gross Weight (kg)	75kg (Estimated data,2pcs /Case)
Outer Package Size	1350*300*1150mm (Estimated data,2pcs /Case)
Packing Material	Carton + wooden pallet + pearl cotton



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

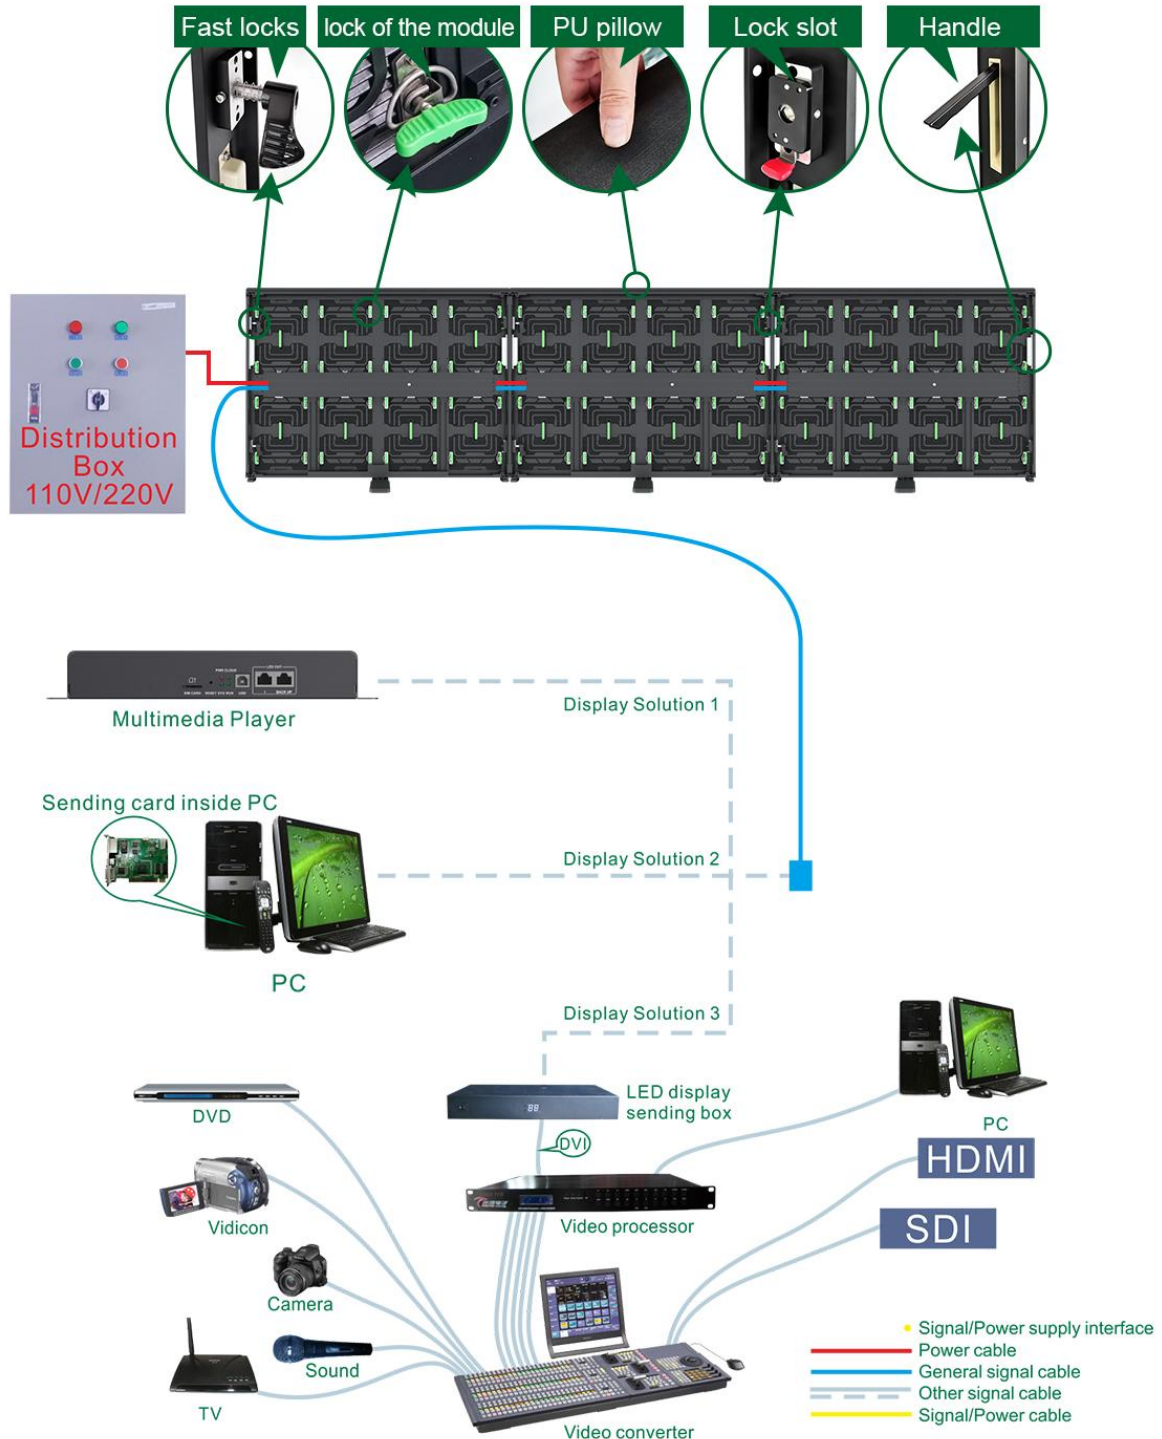

P8 Specification of Full Color Stadium Screen

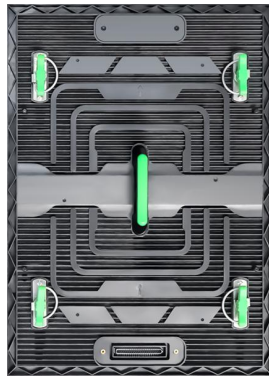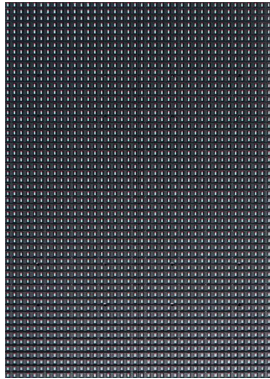

Module



Cabinet



- ◆ The cabinet comes with a 90° rotating bracket and left and right fast locks for efficient assembly of the stadium LED display.
- ◆ The screen comes with soft mask and pillow protection, so athletes and the LED display are perfectly protected.
- ◆ Aluminum power box, thin and light, good heat dissipation, slowing down the aging of the power and module.
- ◆ Front and rear maintenance of the module, easy operation.
- ◆ Waterproof and dustproof, protection grade \geq IP65.
- ◆ Energy-saving, about 1/3 energy saving than traditional LED display, greatly reducing the operating cost.
- ◆ Professional software, and supports video source input such as DP, HDMD, VGA, SDL, DVD, etc.

Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	8mm、 40*56Dots、 320*450mm
	Pixel color、 Pixel LED	SMD3535
	Working voltage、 Module Power	4.2V/3.2V、 ≤60W
	Driving IC、 Driving way	ICND2153S、 1/4S
	HUB	HUB75
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum alloy cabinet、 32.5kg/PCS
	Resolution rate、 size、 Module quantity	160*112 Dots、 1280*900*100mm、 4*2
	Density	15625 Dots/m ²
	White balance 、 Color temperature	≤8000cd/m ² 、 6000k-8000k
	view angel、 Non-Flatness、 Module interval	H:120° ; V:120° 、 <0.2mm、 <0.5mm
	Maximal power/m ² 、 Average power/m ²	≤470w/m ² 、 ≤140w/m ²
	Frame frequency、Refresh frequency、Gray grade	60hz、 ≥3840hz、 ≥14bit
	Control system、 System supports	Nova, Colorlight, CHIPSHOW; Windows XP, WIN 13
	Working temperature、 Protection grade	-20 ~50°C、 Front/Back: IP65/IP54
*Reference information, different configurations, different parameters		

Package Parameters:



Gross Weight (kg)	75kg (Estimated data,2pcs /Case)
Outer Package Size	1350*300*1150mm (Estimated data,2pcs /Case)
Packing Material	Carton + wooden pallet + pearl cotton



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

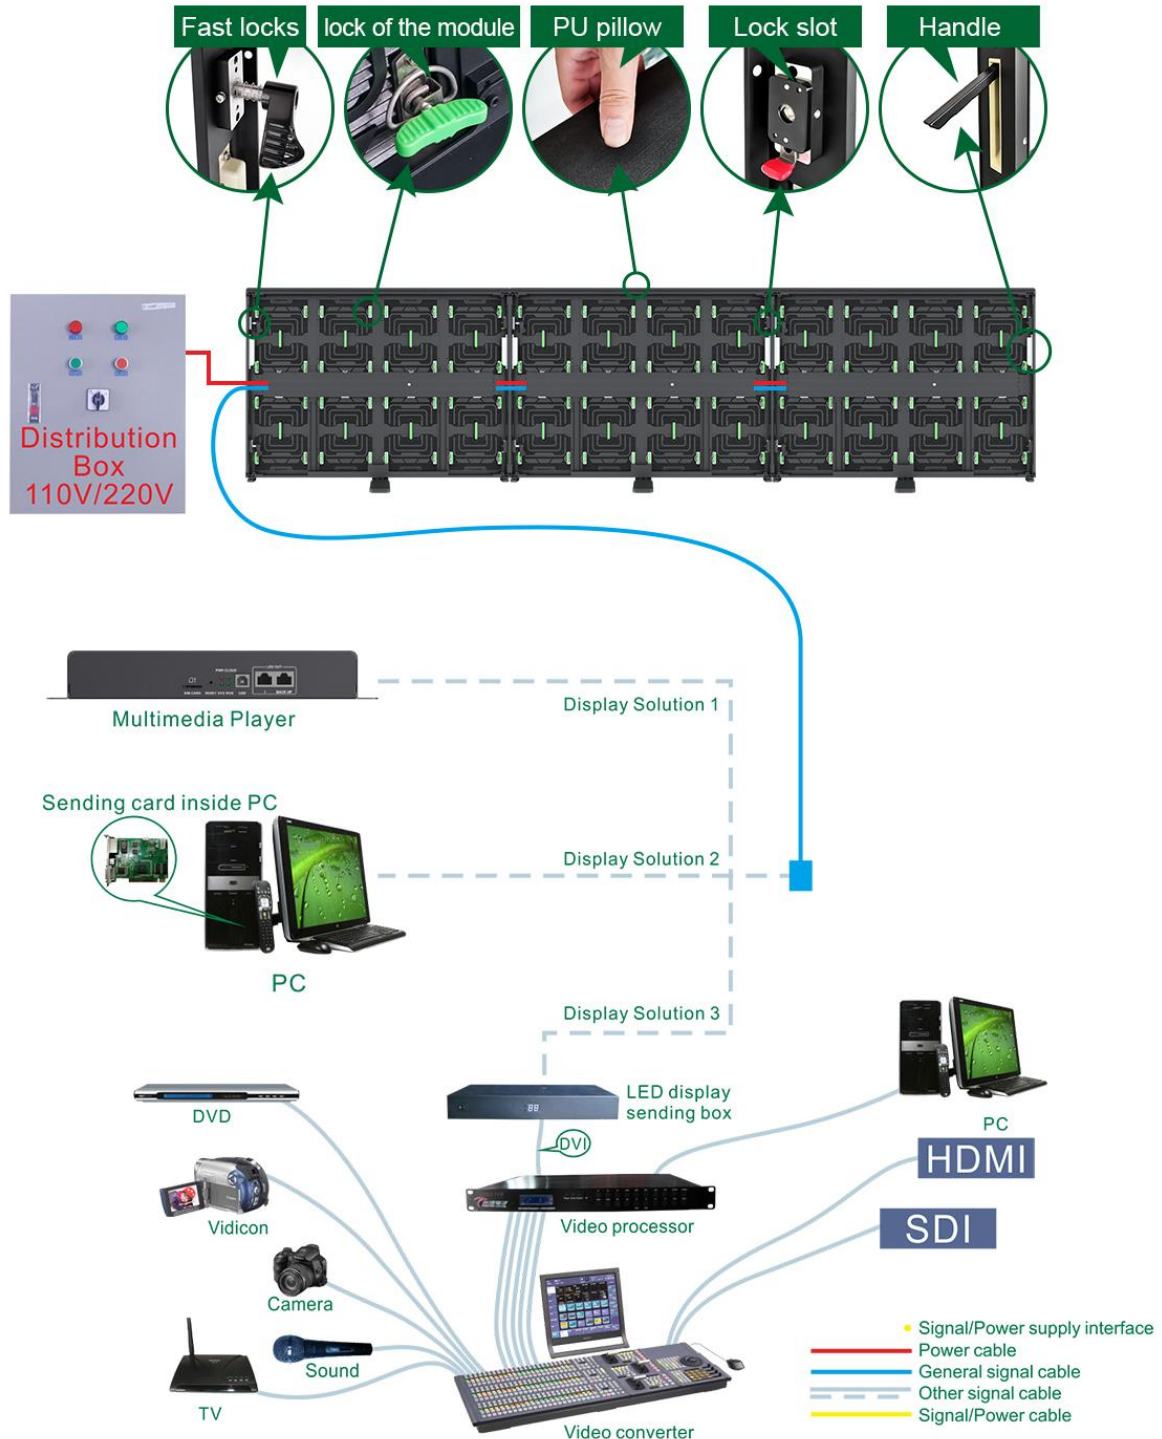

P8 Specification of Full Color Stadium Screen

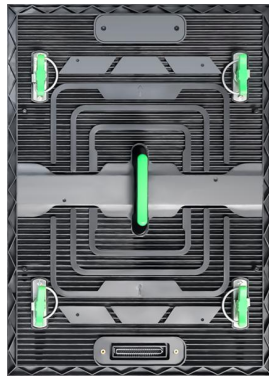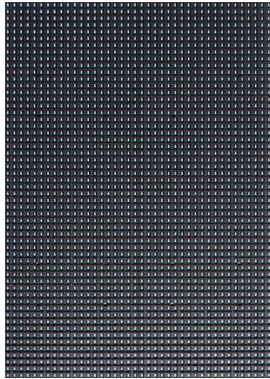

Module



Cabinet



- ◆ The cabinet comes with a 90° rotating bracket and left and right fast locks for efficient assembly of the stadium LED display.
- ◆ The screen comes with soft mask and pillow protection, so athletes and the LED display are perfectly protected.
- ◆ Aluminum power box, thin and light, good heat dissipation, slowing down the aging of the power and module.
- ◆ Front and rear maintenance of the module, easy operation.
- ◆ Waterproof and dustproof, protection grade \geq IP65.
- ◆ Energy-saving, about 1/3 energy saving than traditional LED display, greatly reducing the operating cost.
- ◆ Professional software, and supports video source input such as DP, HDMD, VGA, SDL, DVD, etc.

Technical Parameters:

	Item	Specification Parameter
Module Parameter	Pixel Pitch、 Resolution rate、 size	8mm、 40*56Dots、 320*450mm
	Pixel color、 Pixel LED	ICE LEDs
	Working voltage、 Module Power	4. 2V/3. 2V、 ≤70W
	Driving IC、 Driving way	ICND2153S、 1/4S
	HUB	HUB75
Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)	Aluminum alloy cabinet、 32.5kg/PCS
	Resolution rate、 size、 Module quantity	160*112 Dots、 1280*900*100mm、 4*2
	Density	15625 Dots/m ²
	White balance 、 Color temperature	≤10000cd/m ² 、 6000k-8000k
	view angel、 Non-Flatness、 Module interval	H:100° ; V:45° 、 <0.2mm、 <0.5mm
	Maximal power/m ² 、 Average power/m ²	≤560w/m ² 、 ≤180w/m ²
	Frame frequency、Refresh frequency、Gray grade	60hz、 ≥3840hz、 ≥14bit
	Control system、 System supports	Nova, Colorlight, CHIPSHOW; Windows XP, WIN 13
	Working temperature、 Protection grade	-20 ~50°C、 Front/Back: IP65/IP65
*Reference information, different configurations, different parameters		

Package Parameters:

Gross Weight (kg)	75kg (Estimated data,2pcs /Case)
Outer Package Size	1350*300*1150mm (Estimated data,2pcs /Case)
Packing Material	Carton + wooden pallet + pearl cotton



Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:

